

IB915 with Heat spreader



IB915 with Heatsink

Features

- Onboard 6th Gen Intel® Core™ U-Series processor
- 2x DDR3L-1600 SO-DIMM, Max. 16GB
- Supports eDP, DP and 24bit dual-channel LVDS
- 2x Intel® Gigabit LAN
- Watchdog timer, Digital I/O, mSATA, iSMART
- 2x USB 2.0, 4x USB 3.0, 1x USB 3.1 (Type-C), 4x COM, 2x SATA III
- 1x Mini PCI-E slot

Specifications


CPU	BGA1356 for 6th Gen Intel® Core™ U-Series i7/i5/i3/ Celeron® DC processors, up to 3.4GHz
PCH	Integrated in 6th Gen Intel® Core™ U-Series processor
Memory Type	2x DDR3L-1600 SO-DIMM, Max 16GB (Non-ECC)
BIOS	AMI
Watchdog Timer	256 levels
H/W Monitor	Yes
Storage Device Interface	1x mSATA
Mini Type Slots	1x Mini PCI-E (full-size)
Graphics Controller	6th Gen Intel® Core™ U-Series processor integrated graphics
Video Output	Supports eDP, DisplayPort and 24-bit dual-channel LVDS
Ethernet	IB915AF: Intel® I219LM LAN PHY IB915F: Intel® I219V LAN PHY Intel® I211AT Gigabit LAN (as 2nd LAN)
I/O Chip	Fintek F81846AD-I
Serial Port	1x RS232/422/485 (jumper-less selection), 3x RS232
USB 2.0	2x USB2.0 via pin header
USB 3.X	1x USB 3.1 (Type-C) 4x USB 3.0 on board
Serial ATA	2x SATA III
Audio	6th Gen Intel® Core™ U-Series processor built-in HD audio controller + Realtek ALC888S codec
TPM	N/A
Others	Digital I/O, +9V~ +24V DC-in, iSMART
Dimensions (L x W)	102mm x 147mm (4" x 5.8")
Max. Power Requirement	Intel® Core™ i3-6100U 2.3GHz w/ 2x DDR3L-1600 4GB, +12V: 2.36A Intel® Core™ i7-6600U 2.6GHz w/ 2x DDR3L-1600 4GB, +12V: 2.27A
Power Consumption	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	90% (non-condensing @60°C)

Ordering Information

IB915AFS-6600	Intel® Core™ i7-6600U(2.6GHz/3.4GHz) 3.5" SBC w/ dual PCI-E GbE LAN, eDP, DP & LVDS (24-bit LVDS dual-channel), mSATA, iSMART, iAMT(11.0)
IB915AFS-6300	Intel® Core™ i5-6300U(2.4GHz/3GHz) 3.5" SBC w/ dual PCI-E GbE LAN, eDP, DP & LVDS (24-bit LVDS dual-channel), mSATA, iSMART, iAMT(11.0)
IB915FS-6100	Intel® Core™ i3-6100U(2.3GHz) 3.5" SBC w/ dual PCI-E GbE LAN, eDP, DP & LVDS (24-bit LVDS dual-channel), mSATA, iSMART
IB915F-3955 (MOQ)	Intel® Celeron® 3955U (2GHz) 3.5" SBC w/ dual PCI-E GbE LAN, eDP, DP & LVDS (24-bit LVDS dual-channel), mSATA, iSMART
HSIB915-BGA-A	Heatsink for IB915
HSIB915-BGA-1	Heat spreader for IB915
IB76A-2	Cable kit w/ USB, COM, Power, SATA + Power cable

* (S) means with Realtek ALC888S codec

Dimensions and Drawing

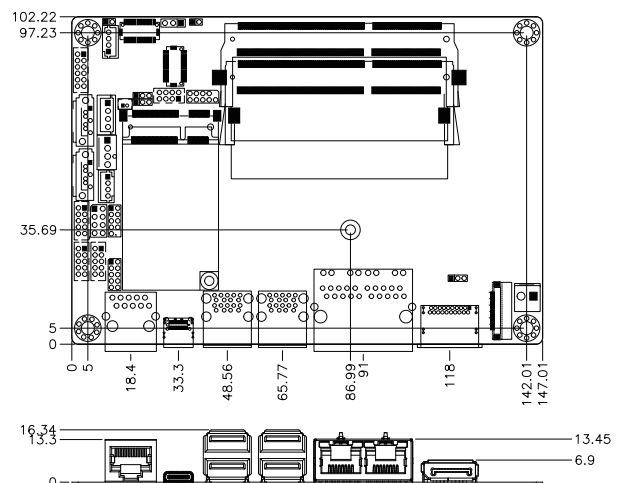

1 CPU Modules

2 Disk-Size SBCs

3 Motherboards

4 CPUC ards

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Ibase](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)
[S16M-IND](#)