

IOPS-76 OPS Signage Player, with 2nd/3rd Gen. Intel® Core™ i Processor and Intel® HD Integrated Graphics

OPS Module



Specifications

System Mainboard	iOPS-76 MB
CPU Type	2nd/3rd Generation Intel® Core™ i7/i5/i3/ Celeron® Quad-Core/Dual-Core Mobile Processors (TDP <= 35W)
CPU Package	FCBGA1023
Chipset	Intel® QM77 PCH
Memory	2x DDR3 1600MHz SO-DIMM memory, Max. 16GB
Graphics	Intel® HD Graphics supports: OpenGL 3.0 DirectX® 11 OpenCL 1.1 MFX Hardware Video Decoder – MPEG-2, AVC, VC-1, JPEG
LAN	1x Intel® 82579LM Gigabit LAN controller
Expansion Slots	1x Mini PCI-E(x1) slot for Wi-Fi, Bluetooth, TV Tuner, 3G Wireless
I/O Interface	1x DisplayPort 2x USB 3.0 ports 1x RJ45 for LAN 2x Microjack audio connectors for Line-in / Line-out Power On/Reset button
Auto Control and Monitoring	256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	DC-in +12~+19V (Intel® OPS standard)
Construction	Aluminum + SGCC(steel)
Weight	0.9kg (1.98lbs)
Chassis Color	Black
Storage	1x mSATA
Mounting	Open Pluggable Specification
Dimensions	200mm(W) x 119mm(D) x 30mm(H) 7.87"(W) x 4.69"(D) x 1.18"(H)
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 80°C (-4°F ~ 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	mSATA: 5 grms / 5~500Hz / random operation
Certification	CE, FCC

Features

- Supports 2nd/3rd Generation Intel® Core™ i5/i7/ Celeron Mobile QC/DC Processors
- 2x DDR3 1333MHz SO-DIMM, Max. 16GB
- Supported I/O: Display port, USB 3.0, LAN port
- Intel® HD Graphics Engine
- iAMT Compliance for remote management
- 2x USB 3.0 ports
- 1x Mini PCI-E(x1) slots for Wi-Fi/ Bluetooth/ TV / Tuner/ 3G Wireless options


Expansion Dock

I/O Interface	1x DisplayPort, 1x HDMI port 1x USB 3.0 port, 2x USB 2.0 ports 1x DB9 for RS232 1x Microjack audio connectors for Line-in / Line-out 1x 12~19V Mini DIN DC Jack
Dimensions	7.89"(W) x 6.85"(D) x 1.44"(H)

Ordering Information

iOPS-76	OPS Player with Intel® Core™ i5-3610ME Mobile processor (3M Cache, up to 3.30 GHz) 8GB RAM, 64GB mSATA
iOPS-76L	OPS Player with Intel® Celeron® 827E processor(1.5M Cache, 1.40 GHz), 8GB RAM, 64GB mSATA
iOPS-76-M	OPS Player with Intel® Core™ i5-3610ME Mobile processor(3M Cache, up to 3.30 GHz) without Memory / mSATA
iOPS-76L-M	OPS Player with Intel® Celeron® 827E Mobile processor, without Memory / mSATA
iOPS-EK1-SYS	iOPS-76 series Expansion Dock with 150W adapter- for use without OPS display

Dimensions

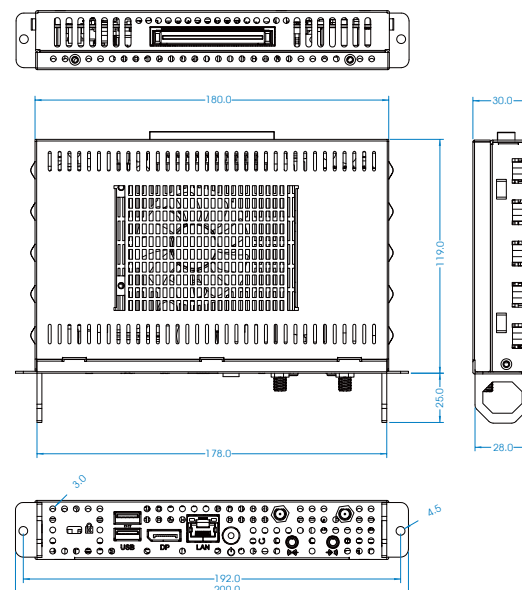

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Ibase](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)
[T1215DA-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-](#)
[S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-710AI-00A1](#) [MIC-720AI-00A1](#) [UNO-247-](#)
[J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-](#)
[I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#) [BKCM8i7CB8N](#)