


Features

- Onboard 6th Gen Intel® Xeon® E3 / Core™ i7/i5/i3 / Celeron® QC/DC processors, up to 3.7GHz
- 2x DDR4 SO-DIMM, Max. 32GB, ECC compatible
- Intel® Processor integrated graphics device, supports DVI-D, HDMI (2.0), DisplayPort and 24-bit dual-channel LVDS
- 2x Intel® Gigabit LAN
- 4x USB 2.0, 6x USB 3.0, 6x COM, 4x SATA III
- 1x PCI-E (x16), 2x Mini PCI-E, 1x mSATA, 1x M.2
- Watchdog timer, Digital I/O, iAMT (11.0), TPM (2.0), vPro, iSMART 3.0



Specifications


CPU Socket	BGA1440
CPU Socket	6th Gen Intel® Xeon® E3/ Core™ i7/i5/i3 / Celeron® QC/ DC processors, up to 3.7GHz
PCH	MI990VF series: Intel® CM236 PCH MI990EF series: Intel® HM170 PCH
Memory Types	2x DDR4 SO-DIMM, Max. 32GB (supports ECC by CPU SKUs)
BIOS	AMI
Watchdog Timer	256 levels
H/W Monitor	Yes
Storage Device Interface	1x mSATA via Mini PCI-E (Thru SATA III) 1x M.2 slot (Thru SATA III & PCI-E)
Expansion Slots	1x PCI-E (x16)
Mini Type Slots	2x Mini PCI-E 1x M.2
Graphics Controller	6th Gen Intel® Xeon® / Core™ i7/ i5/ i3 / Celeron® processor integrated
Video Output	Supports DVI-D, HDMI (2.0), DisplayPort and 24-bit dual-channel LVDS
Ethernet	MI990VF series: Intel® I219LM Gigabit LAN PHY MI990EF series: Intel® I219V Gigabit LAN PHY Intel® I211AT PCI-E Gigabit LAN (as 2nd LAN)
I/O Chip	Fintek F81866AD-I
Serial Port	5x RS232 1x RS232/422/485 (jumper-less selection)
USB 2.0	4xs USB 2.0 via pin-header
USB 3.0/ 3.1	6x USB 3.0 on board
Serial ATA	MI990VF series: 4x SATA III MI990EF series: 2x SATA III
Audio	Intel® CM236 / HM170 PCH built-in HD audio + Realtek ALC888S codec
TPM	TPM (2.0)
Others	Digital I/O(4-in/4-out), RAID, iAMT (11.0), iSMART
Dimensions (L x W)	170mm x 170mm (6.7" x 6.7")
Power Consumption	Intel® Core™ i5-6400EQ 2.4GHz w/ 2x 8GB DDR4-2133 +12V: 2.84A; +5V: 1.45A; +5VSB: 0.058A; +3.3V: 0.52A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	90% (non-condensing @60°C)

Ordering Information

MI990VFS-X28E	BGA1440 Intel® CM236/ Xeon® E3-1505M v5(2.8GHz) Mini-ITX motherboard w/ DVI-D, HDMI (2.0), DisplayPort, LVDS, dual Gigabit LAN, RAID, iAMT (11.0), TPM (2.0), vPro, iSMART (3.0), CPU cooler on board
MI990VFS-6820E	BGA1440 Intel® CM236/ Core™ i7-6820EQ(2.8GHz) Mini-ITX motherboard w/ DVI-D, HDMI (2.0), DisplayPort, LVDS, dual Gigabit LAN, RAID, iAMT (11.0), TPM (2.0), vPro, iSMART (3.0), CPU cooler on board
MI990VFS-6440E	BGA1440 Intel® CM236/ Core™ i5-6440EQ(2.7GHz) Mini-ITX motherboard w/ DVI-D, HDMI (2.0), DisplayPort, LVDS, dual Gigabit LAN, RAID, iAMT (11.0), TPM (2.0), vPro, iSMART (3.0), CPU cooler on board
MI990EFS-6100E	BGA1440 Intel® HM170/ Core™ i3-6100E(2.7GHz) Mini-ITX motherboard w/ DVI-D, HDMI (2.0), DisplayPort, LVDS, dual Gigabit LAN, RAID, EuP/ErP compliant, iSMART (3.0), CPU cooler on board

*(S) means with Realtek ALC888S codec

Dimensions and Drawing

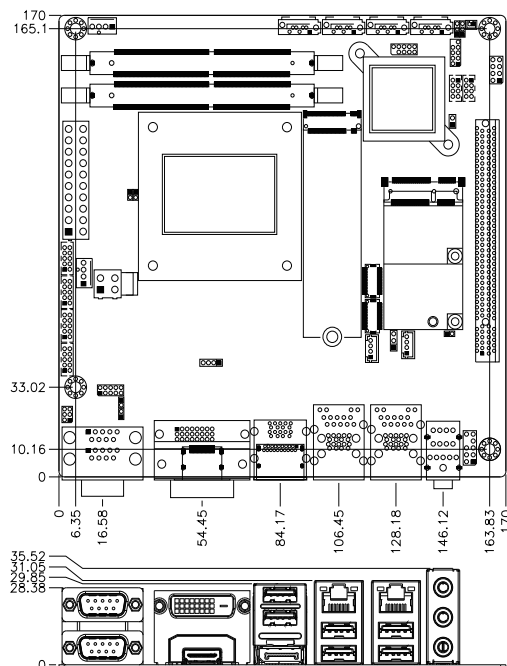

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Ibase](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)