

# SE-92

## Outdoor Signage Player

5th Gen Intel® Core™ i7/i5 ULT Processor-based Fanless Signage Player with Dual DVI-I and Wide-Range Operating Temperature



SE-92 VIDEO



## Features

- iSMART - for EuP/ErP power saving, auto-scheduling and power resume
- Supports 5th Generation Intel® Core™ i7/i5/i3 ULT Processors with integrated Intel® HD graphics engine
- iAMT for remote management
- 1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth or 4G LTE options
- 1x M.2 M-Key (2280) for storage
- 1x M.2 E-Key (2230) for Wi-Fi, Bluetooth or 4G LTE options
- 7V~36V DC wide-range power input
- Wide-range operating temperature from -40°C to 75°C
- Ruggedized, fanless and all solid state design


## Specifications

System Mainboard	IB912
CPU	5th Generation Intel® Core™ i7/i5/i3 ULT Processors
CPU Socket	FCBGA1168
Chipset	SoP (System-on-Package)
Memory	2x DDR3L-1600 SO-DIMM Max. 16GB
Graphics	Intel® HD graphics engine
LAN	1x Intel® 218LM Gigabit LAN controller 1x Intel® 210IT PCI-E Gigabit LAN controller
Expansion Slots	1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth or 4G LTE 1x SIM card slot 1x M.2 M-Key (2280) for storage 1x M.2 E-Key (2230) for Wi-Fi, Bluetooth or 4G LTE
I/O Interface	2x DVI-I with EDID emulation function 2x USB 2.0 2x USB 3.0 2x RJ45 for Gigabit LAN 1x RJ45 for RS-232 serial port 2x Microjack audio connectors for Mic-in / Line-out Power / HDD LED, 1x power on/off button 1x 4-pin 7V~36V DC terminal block
Auto Control and Monitoring	Watchdog Timer: 256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	7V~36V DC-in
Construction	Aluminum + SGCC
Weight	3.7 kgs (8.16 lbs)
Chassis Color	Black & white
Storage	1x 2.5" HDD/SSD 1x mSATA 1x NGFF M key 22 x 80mm (2280)
Power Supply	80W power adaptor for (optional)
Mounting	Standard system bracket
Dimensions	280mm(W) x 216mm(D) x 46mm(H) 11.02"(W) x 8.5"(D) x 1.81"(H)
Operating Temperature	-40°C~ 75°C (-40°F~ 167°F) with SSD w/o Wi-Fi or 4G/LTE
Storage Temperature	-50°C~85°C (-58°F~ 185°F) with SSD
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	mSATA: 5 grms / 5~500Hz / random operation
Certification	CE, FCC class B, cULus & CCC
Operating System	Win7 32/64-bit, Win8.1. WEI8.1

## Ordering Information

SE-92-I7	Outdoor/In-vehicle Signage Player with Intel® Core™ i7-5650U ULT processor, wide temp 2x 4GB DDR3L SO-DIMM memory, wide temp 64GB SSD
SE-92-I5	Outdoor/In-vehicle Signage Player with Intel® Core™ i5-5350U ULT processor, wide temp 2x 4GB DDR3L SO-DIMM memory, wide temp 64GB SSD
80W Power adaptor	AC/DC 24V output, 80W power adaptor

## Dimensions

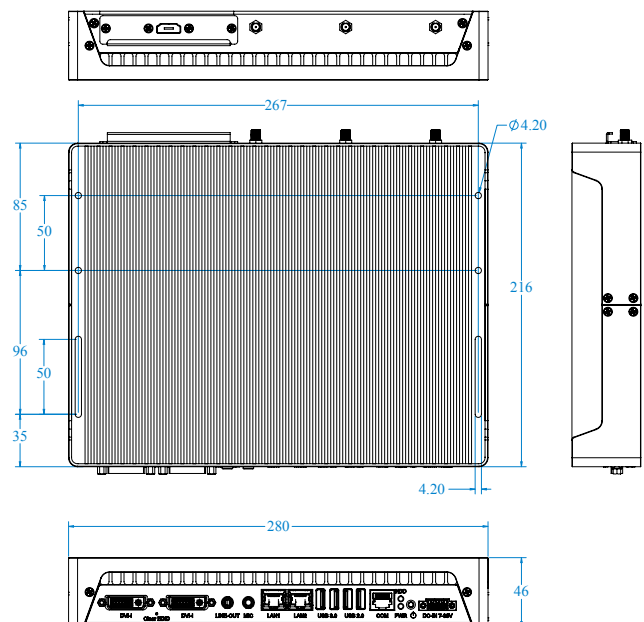

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Embedded Box Computers](#) category:*

*Click to view products by [Ibase](#) manufacturer:*

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)  
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)  
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)  
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#)  
[ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#)  
[APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-](#)  
[10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#)  
[EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)