

# SI-60E

## Extreme Performance Signage Player

4th Gen Intel® Core™ Desktop Processor-based Signage Player with AMD Radeon™ E8860 Graphics and Twelve HDMI



SI-60E VIDEO



### Features

- iCONTROL intelligent energy-saving & Observer remote monitoring technologies
- 12x HDMI 1.3 (w/o audio)
- Built-in hardware EDID emulation function
- Discrete AMD Radeon™ E8860 graphics processors with 2GB GDDR5 graphics memory
- Supports 4th Generation Intel® Core™ desktop processor
- 4x DDR3-1600 DIMM, dual channel, Max. 32GB
- 2x RS232 serial ports
- 1x Mini PCI-E (full-size) for mSATA, Wi-Fi, Bluetooth or 4G LTE options
- 1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth or 4G LTE
- 2x SATA III 2.5" HDD with RAID 1 support
- Compact and rugged design


### Specifications

System Mainboard	MBD60E
CPU	4th Generation Intel® Core™ i7/i5/i3 and Pentium® QC/DC processors, Up to 3.5GHz
CPU Socket	LGA1150
Chipset	Intel® Q87 PCH
Memory	4x 8G DDR3-1600 DIMM, Max. 32GB
Graphics	AMD E8860 GPU with 128-bit wide, 2GB GDDR5, 72Gbps 640 Shader processors • AMD APP technology, OpenCL™ 1.24, DirectCompute 11.1 • 768 / 48 GFLOPS single- / double-precision peak (600e/4.5Gbps) • Supports AMD Eyefinity technology
LAN	1x Intel® Clarkville I218LM Gigabit LAN controller 1x Realtek RTL8111G-CG Gigabit LAN controller
Expansion Slots	1x Mini PCI-E (full-size) for mSATA, Wi-Fi, Bluetooth or 4G LTE options 1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth or 4G LTE
I/O Interface	12x HDMI 1.3 with hardware EDID emulation 1x DVI-I for console 4x USB 3.0 ports 2x RJ45 for Gigabit LAN 1x DSUB 9-pin for RS232 3x Microjack audio connectors for Line-in / Line-out/Mic-in Power LED for power on/off & HDD 1x Power button 1x AC power inlet
Auto Control and Monitoring	Watchdog Timer: 256 segments, 0, 1, 2...255 (sec/min)
Construction	SGCC
Weight	5.4 kgs (11.9 lbs)
Chassis Color	Black and white
Storage	2x SATA III 2.5" HDD Dock (supports RAID 1)
Mounting	Standard system bracket
Dimensions	412mm(W) x 310mm(D) x 47mm(H) 16.22"(W) x 12.2"(D) x 1.85"(H)
Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20°C ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	mSATA: 5 grms / 5~500Hz / random operation
Certification	CE, FCC class B, VCCI, cULus, CCC & KC
Operating System	Windows XP, Win7 32/64-bit, Win8 64-bit, Win8.1 64-bit Win10 64-bit Enterprise, WEC 2013

### Ordering Information

SI-60E	Signage Player with MBD60E (w/ AMD E8860 for 12x HDMI), with 4th Generation Intel® Core™ (DT) i7-4770S processor, 4x 8GB DDR3 DIMM, 2.5" 128GB SSD and 250W PSU
SI-60X	Rackmount bracket

### Dimensions

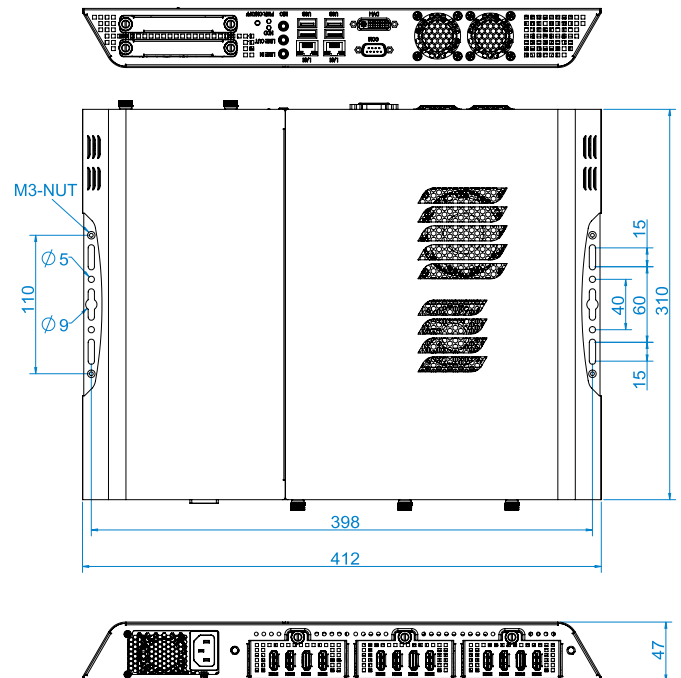

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Embedded Box Computers](#) category:*

*Click to view products by [Ibase](#) manufacturer:*

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)  
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)  
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)  
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#)  
[ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#)  
[APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-](#)  
[10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#)  
[EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)