


# CT09 Series SMT Current Sense Transformers

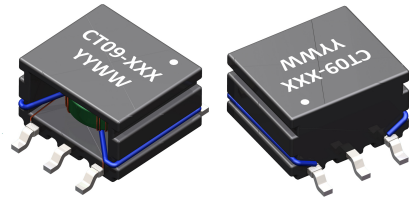

## FEATURES

- 9.2 mm Creepage
- 8.0 mm Clearance
- Primary Rated for 6A
- Optimized for Frequencies from 10kHz to 800kHz
- Full Selections of Turns Ratios
- Suitable for pick-and-place applications

## APPLICATIONS

- DC/DC Converters
- AC/DC Converters


## PACKAGING

Reel Diameter: 13"


Reel Width: 24mm

Pieces Per Reel: 500


## Mechanical Drawing

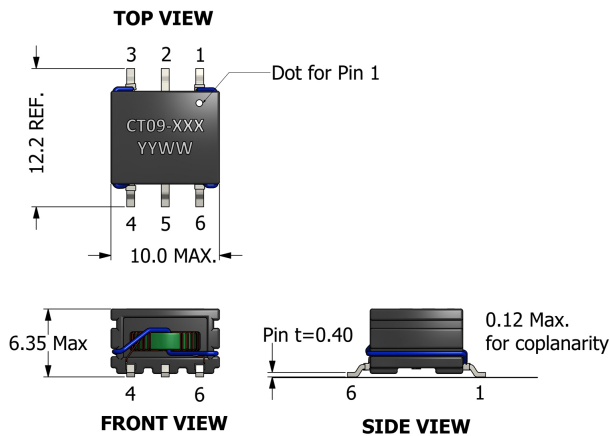

## Recommended PCB Layout

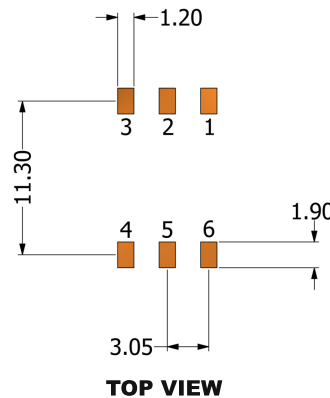

## Schematic



Unit: mm

## Electrical Specifications

Part Number	Turns Ratio (Pri:Sec)	Ls <sup>1</sup> (μH, min.)	DCR <sup>2</sup> (Pri:Sec) (mΩ, max.)	Pri. Current Rating(A)	E-T Prod. <sup>4</sup> (V-μs)	Hi-Pot <sup>5</sup> (V <sub>AC</sub> ) (Pri:Sec)
CT09-020	1:20	160	6:120	6.0	31	3750
CT09-040	1:40	640	6:430	6.0	63	3750
CT09-060	1:60	1400	6:1300	6.0	95	3750
CT09-080	1:80	2500	6:1700	6.0	127	3750

## Notes:

1. Tested at 10kHz, 0.1Vrms (Terminals 6-4).
2. Electrical specifications at 25°C.
3. Operating range: -40°C to +130°C.
4. E-T product rating is for (6-4) windings and is based upon flux density of 3700 Gauss at 25°C in a bipolar drive applications.
5. Tested at 60Hz, 1mA, 1 second.
6. Meets UL 94V-0.



Specifications subject to change without prior notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Current Transformers](#) category:*

*Click to view products by [ICE](#) manufacturer:*

Other Similar products are found below :

[L595100](#) [ACST-260](#) [AKW4802C](#) [MP3500](#) [L595050](#) [E54CT1L](#) [CTD-KIT](#) [44021](#) [44104](#) [44176](#) [44248](#) [45041](#) [45071](#) [PA3828NL](#) [CT16-1-50A/50MA](#) [SPCT 100/60 1200/5A VA 15 CL 0.5](#) [SPCT 100/60 1000/5A VA 15 CL 0.5](#) [SPCT 100/60 600/5 A VA 7.5 CL 1](#) [SPCT 100/60 600/5 A VA 5 CL 0.5](#) [SPCT 100/60 800/5 A VA 10 CL 0.5](#) [SPCT 140/100 1200/5A VA 15 CL 0.5](#) [SPCT 140/100 1250/5A VA 15 CL 0.5](#) [SPCT 140/100 1500/5A VA 15 CL 0.5](#) [SPCT 140/100 1600/5A VA 15 CL 0.5](#) [SPCT 140/100 1000/5A VA 15 CL 0.5](#) [SPCT 140/100 2500/5A VA 15 CL 0.5](#) [SPCT 140/100 2000/5A VA 15 CL 0.5](#) [SPCT 140/100 3000/5A VA 15 CL 0.5](#) [SPCT 140/100 800/5A VA 15 CL 0.5](#) [SPCT 62/30 50/5A VA1 CL 3](#) [SPCT 62/30 60/5A VA1 CL 3](#) [SPCT 62/30 75/5A VA1 CL 3](#) [SPCT 62/30 75/5A VA3 CL 3](#) [SPCT 62/40 100/5 A VA 1 CL 1](#) [SPCT 62/40 125/5 A VA 1 CL 1](#) [SPCT 62/40 150/5 A VA 3 CL 1](#) [SPCT 62/40 160/5 A VA 1.5 CL 1](#) [SPCT 62/40 200/5 A VA 3 CL 1](#) [SPCT 62/40 250/5 A VA 2.5 CL 0.5](#) [SPCT 62/40 250/5 A VA 3 CL 1](#) [SPCT 62/40 300/5 A VA 3 CL 0.5](#) [SPCT 62/40 400/5 A VA 3.75 CL 0.5](#) [2CSM029000R1211](#) [HPT205NBJ-1](#) [HCT204KFH](#) [HCT20K-QD](#) [HPT205A/F](#) [HCT-1\(80\)AH](#) [HCT916HBT-1W](#) [CT100A](#)