


TECHNICAL DATA SHEET

Thermoplastic Elastomer TPE

General notes:

- » **TPE** Olefinic Thermoplastic Elastomer, Permanent Antistatic
- » Soft Plastic, was developed in order to achieve a surface resistance 10^8 - 10^9 Ohm in order to minimize the possibility of charge generation by wearing

- » **ESD Protection**

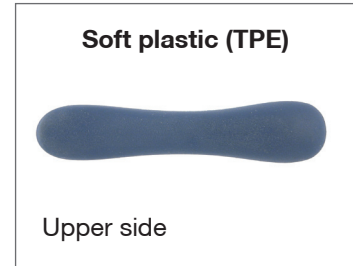

Mechanical properties


Tensile strength	2 MPa	ISO 527 ASTM D 638
Tensile elongation	10 +%	ISO 527 ASTM D 638
Hardness, Shore	65-75 A	D-785

Polypropylen compound PP

General notes:

- » **PP** polypropylene-compound
- » Hard Plastic, its function is to ground the metal tool (through the operators hand and the ESD wrist strap)

- » **ESD Protection**

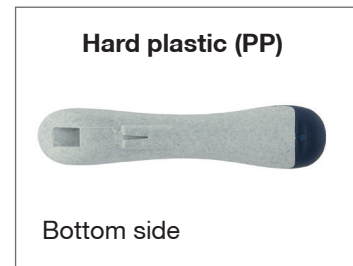

Mechanical properties

Tensile strength at break (5mm/min)	20 MPa	ISO 527 ASTM D 638
Elongation at break (5mm/min)	>10%	ISO 527 ASTM D 638
Tensile modulus +23°C	1650 MPa	ISO 527 ASTM D 638
Tensile strength +23°C	190 MPa	ISO 527 ASTM D 638
Izod-Impact strength (notched) +23°C	13 kJ/m	ISO 179/2C

Thermal properties

Temp. of defl. under load (1.80 MPa)	56 °C	ISO 75 ASTM D 648
VICAT softening point B (49 N)	70 °C	ISO 306

Other properties

Density	0.97 g/cm³	ISO 1183
---------	-------------------	----------

This document contains information based on average values as obtained from the results of laboratory tests and observations made on the material. Ideal-tek SA declines all responsibility from an improper use of the product described in this document.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pliers & Tweezers](#) category:

Click to view products by [Ideal-Tek](#) manufacturer:

Other Similar products are found below :

[0031](#) [32750](#) [PN-5050/38D](#) [PG-TP-30D](#) [PG-DP-18-N](#) [G77015](#) [4-1532129-2](#) [77 12 115](#) [0037](#) [T0058765801](#) [571](#) [76C](#) [37 31 125](#) [RX 8130](#)
[37 33 125](#) [DRP10N](#) [32 11 135](#) [36 12 130](#) [0036](#) [64 11 115](#) [0032](#) [6231-08](#) [PN 5050/19D](#) [PNI 5000](#) [TP 5000/15D](#) [TR 30 15 V](#) [TR 5000 PR](#)
[TR 58 R A D](#) [00 20 08 US2](#) [13 01 614](#) [87 28 250 SBA](#) [INCP8](#) [30993](#) [011820101](#) [003780032](#) [003780041](#) [134-69-160](#) [134-69-180](#) [135-49-](#)
[VDE-190](#) [137-49-VDE-180](#) [137-49-VDE-200](#) [137-49-VDE-240](#) [137-69-180](#) [137-69-200](#) [137-69-240](#) [138-49-VDE-200](#) [138-69-200](#) [140-49-](#)
[VDE-170](#) [140-49-VDE-205](#) [140-69-205](#)