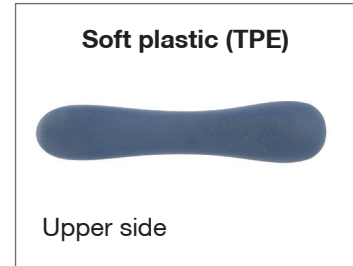TECHNICAL DATA SHEET

Thermoplastic Elastomer TPE

General notes:

» **TPE** Olefinic Thermoplastic Elastomer, Permanent Antistatic

» Soft Plastic, was developed in order to achieve a surface resistance 10^8-10^9 Ohm in order to minimize the possibility of charge generation by wearing
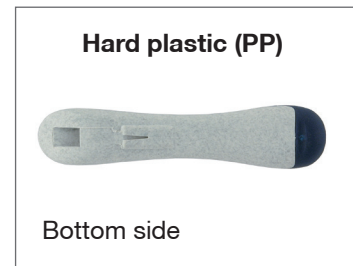
» **ESD** Protection

Soft plastic (TPE)

Upper side

Mechanical properties

Tensile strength	**2 MPa**	*ISO 527 ASTM D 638*
Tensile elongation	**10 +%**	*ISO 527 ASTM D 638*
Hardness, Shore	**65-75 A**	*D-785*

Polypropylen compound PP

General notes:

» **PP** polypropylene-compound

» Hard Plastic, its function is to ground the metal tool (through the operators hand and the ESD wrist strap)

» **ESD** Protection

Hard plastic (PP)

Bottom side

Mechanical properties

Tensile strength at break (5mm/min)	**20 MPa**	*ISO 527 ASTM D 638*
Elongation at break (5mm/min)	**>10%**	*ISO 527 ASTM D 638*
Tensile modulus +23°C	**1650 MPa**	*ISO 527 ASTM D 638*
Tensile strength +23°C	**190 MPa**	*ISO 527 ASTM D 638*
Izod-Impact strength (notched) +23°C	**13 kJ/m**	*ISO 179/2C*

Thermal properties

Temp. of defl. under load (1.80 MPa)	**56 °C**	*ISO 75 ASTM D 648*
VICAT softening point B (49 N)	**70 °C**	*ISO 306*

Other properties

Density	**0.97 g/cm³**	*ISO 1183*

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pliers & Tweezers *category:*

Click to view products by Ideal-Tek *manufacturer:*

Other Similar products are found below :

0031 32750 PN-5050/38D PG-TP-30D PG-DP-18-N G77015 4-1532129-2 77 12 115 0037 T0058765801 571 76C 37 31 125 RX 8130 37 33 125 DRP10N 32 11 135 36 12 130 0036 64 11 115 0032 T3627B 7 HT-109 6211-06 6214-45 6217-05 6231-07 6231-08 6411-06 DP15N DP20N PN 5050/19D PNI 5000 TP 5000/15D TR 20 M TR 25 15 TR 25 P A TR 5000 TR 5000 10 D TR 5000 PG TR 5000 PR TR 58 R A D TR 58 R A 43333 102ACAX 103ACA 141SAP 150SAD 150SAMB 151SA