

## HE1G Basic Grip Enabling Switch

## Key features:

- 3 position functionality (Off – On – Off) as required for manual robotic control
- Ideally suited for use as an enabling (aka “deadman”) switch for robotic cells
- Provides a high level of safety based on human behavioral studies that determine personnel may squeeze OR let go when presented with a panic situation
- Contacts will not re-close when released from Off → On (3 → 1) (per IEC60204-1; 9.2.5.8)
- Optional E-Stop switch built in
- Connection for conduit and cable strain relief built in
- IP66 waterproof sealing
- Meets ANSI RIA 15.06 robotics standards
- Optional momentary pushbutton or E-Stop built in




## Part Numbers


Contact Configuration			Rubber Boot	Part No.	
3-position Switch	Monitor Switch	Pushbutton			
2 contacts	With (1NC)	-	Silicon Rubber / yellow	HE1G-21SM	
			NBR/PVC Polyblend / gray	HE1G-21SM-1N	
	Without	Momentary Pushbutton (1NO) (1NO: AB6M-M1PB)	Silicon Rubber / yellow	HE1G-21SMB	
			NBR/PVC Polyblend / gray	HE1G-21SMB-1N	
			Emergency Stop Switch (2NC) (2NC: HA1E-V2S2R)	Silicon Rubber / yellow	HE1G-20ME
				NBR/PVC Polyblend / gray	HE1G-20ME-1N
Momentary Pushbutton (2NO) (2NO: AB6M-M2PB)	Silicon Rubber / yellow	HE1G-20MB			
	NBR/PVC Polyblend / gray	HE1G-20MB-1N			

## Accessories

## Replacement Rubber Cover

Appearance	Part Number	Material	Color
	HE9Z-GBK1	Silicon Rubber	Yellow
	HE9Z-GBK1-1N	NBR/PVC	Gray

## Mounting Plate (secures grip switch)

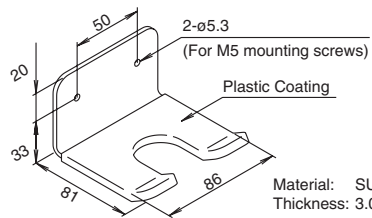Appearance	Part Number	Material
	HE9Z-GH1	Metal

## Specifications

Conforming to Standards	UL508 (UL listed), CSA C22.2, No. 14 (c-UL listed), IEC/EN 60947-5-1 (TÜV/BG approval), GS-ET-22 (TÜV/BG approval)
Applicable Standards	ISO 12100-1, -2, EN12100-1, -2, IEC 60204-1 / EN 60204-1, ISO11161 / prEN11161, ISO 10218 / EN 775, ANSI/RIA R15.06, ANSI B11.19
Operating Temperature	-25 to +60°C (no freezing)
Operating Humidity	45 to 85% RH maximum (no condensation)
Storage Temperature	-40 to +80°C (no freezing)
Pollution Degree	3
Contact Resistance	100mΩ maximum
Insulation Resistance	Between live & dead metal parts: 100MΩ maximum Between positive & negative live parts: 100MΩ minimum

## Specifications con't

Impulse Withstand Voltage	2.5kV	
Operating Frequency	1200 operations/hour	
Mechanical Life	Position 1→2→1: 1,000,000 operations minimum	
	Position 1→2→3→1: 100,000 operations minimum	
Electrical Life	100,000 minimum at rated load	
Shock Resistance	Operating Extremes	150m/s <sup>2</sup> (15 G)
	Damage Limits	1000m/s <sup>2</sup> (100 G)
Vibration Resistance	Operating Extremes	5 to 55Hz, amplitude 0.5mm minimum
	Damage Limits	16.7Hz, amplitude 1.5mm minimum
Recommend Wire Size	0.14 to 1.5mm <sup>2</sup> (24AWG - 16AWG)	
Recommend Cable Size	ø7 to 13mm	
Conduit Size	M20	
Terminal Pulling Strength	20N minimum	
Terminal Screw Torque	0.5 to 0.6Nm	
Degree of Protection	HE1G-21SM: IP66, HE1G-20MB: IP65	
	HE1G-20ME: IP65, HE1G-21SMB: IP65	
Conditional Short Circuit Current	50A (250V)	
Recommended Short Circuit Protection	250V/10A fast blow fuse (IEC 60127-1)	
Weight (approx.)	HE1G-21SM: 210g	
	HE1G-20ME: 250g	
	HE1G-20MB/HE1G-21SMB: 220g	

## Contact Ratings

Rated Insulation Voltage (Ui)		250V				
Thermal Current (Ith)		3A				
Rated Operating Voltage (Ue)		30V	125V	250V		
Rated Operating Current (Ie)	3 Position Switch (Terminal No.1-2, 3-4)	AC	Resistive Load (AC-12)	–	3A	1.5A
			Inductive Load (AC-15)	–	1.5A	0.75A
		DC	Resistive Load (DC-12)	2A	0.4A	0.2A
			Inductive Load (DC-13)	1A	0.22A	0.1A
	Monitor Switch (Terminal No. 5-6 of HE1G-21SM)	AC	Resistive Load (AC-12)	–	2A	1A
			Inductive Load (AC-15)	–	1A	0.5A
		DC	Resistive Load (DC-12)	2A	0.4A	0.2A
			Inductive Load (DC-13)	1A	0.22A	0.1A
	Emergency Stop Pushbutton (Terminal No. 5-6, 7-8 of HE1G-20ME)	AC	Resistive Load (AC-12)	–	–	–
			Inductive Load (AC-15)	–	–	0.5A
		DC	Resistive Load (DC-12)	–	–	–
			Inductive Load (DC-13)	–	–	0.1A
Contact Configuration	3 Position Switch		2 Contacts			
	Monitor Switch		0 or 1 Contact			
	Emergency Stop Pushbutton		0 or 2 Contacts			
	Momentary Pushbutton		0 to 2 contacts			



The minimum load (reference) = AC/DC3V • 5mA (for reference only).

Operating Characteristics  
Contact Movement

Overview

XW Series E-Stops





Interlock Switches

Enabling Switches

Safety Control Relays

Light Curtains

AS-Interface Safety at Work

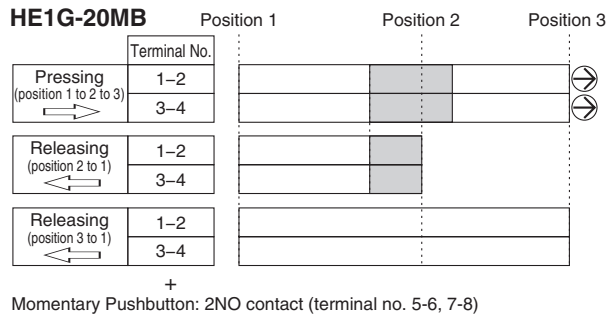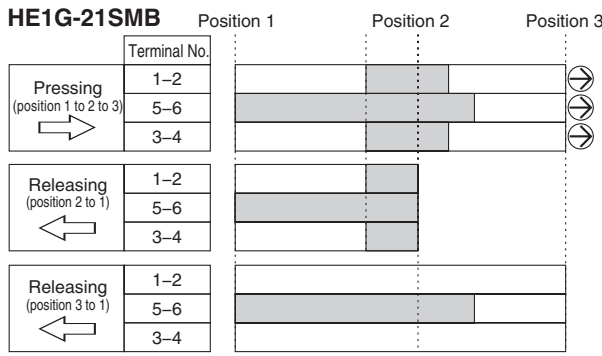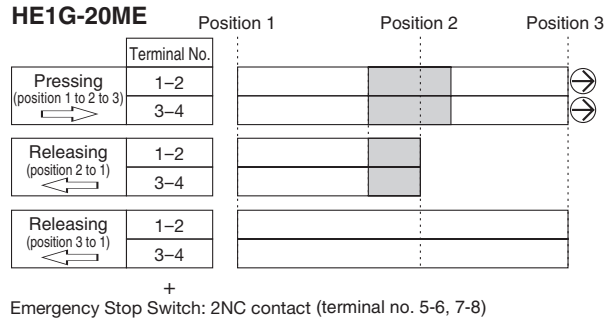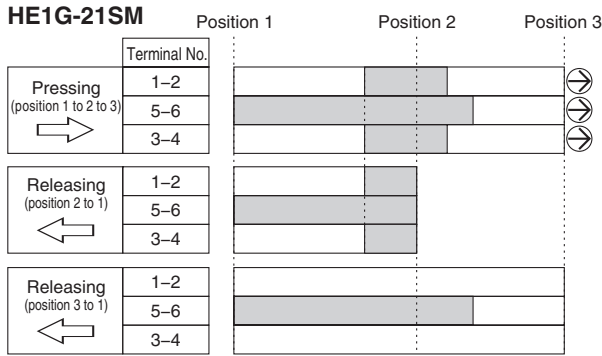

+  
Momentary Pushbutton: 1NO contact (terminal no. 7-8)


■ : contact ON (closed) □ : contact OFF (open)



Notes:

1. 3-position switches operate with direct opening action (⊖) when shifting from position 2 to position 3.
2. For the output of the enabling device, use terminals 1-2 and 3-4.
3. The above operation characteristics show when the center of the button is pressed. Pressing the edge of a button turns on one contact earlier than the other contact, causing a delay in operation.

Dimensions (mm)

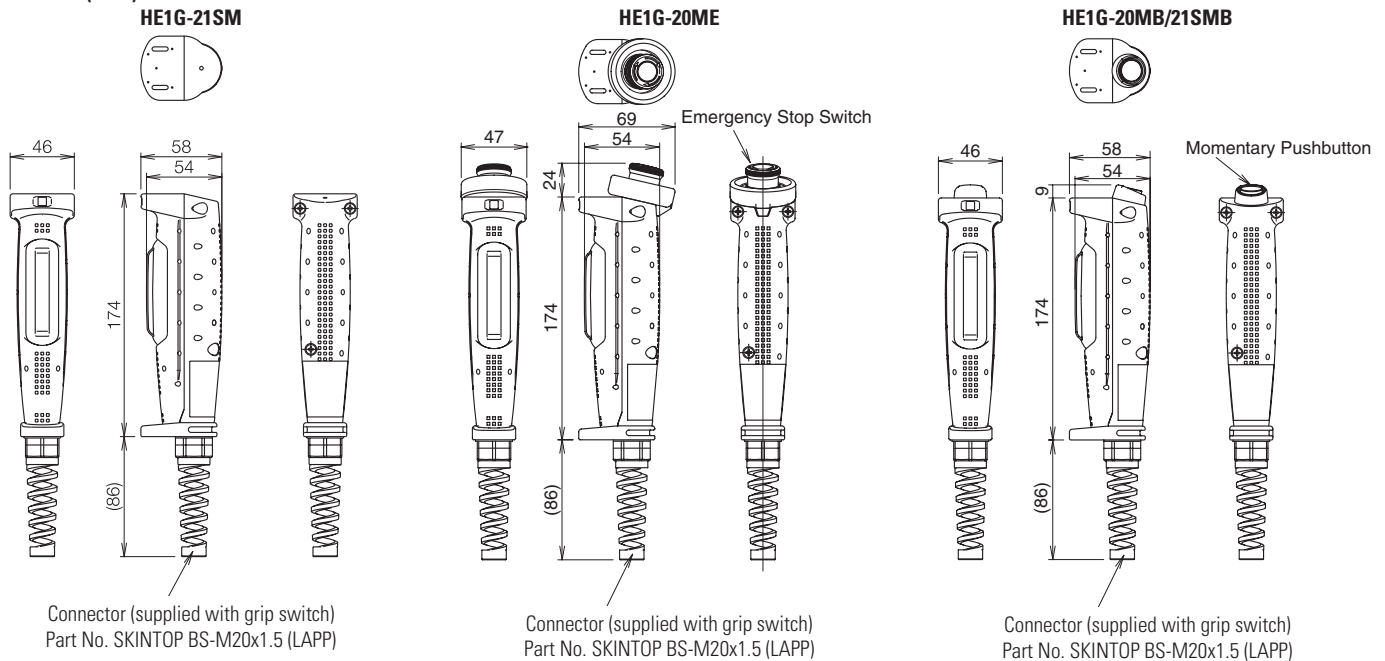


## Wiring Precautions

### HE1G


- Wire Stripping Information

Wire Length	Terminal Number 1-4	Terminal Number 5-8
L1, L2 (mm)	L1=40mm	L2=27mm
L3 (mm)	L3=6mm	

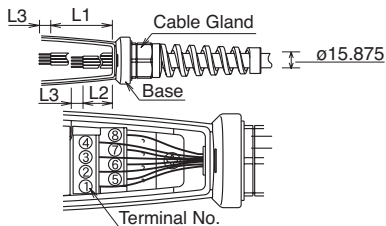

- Applicable Wire Size: 0.14 to 1.5mm<sup>2</sup> (24 - 16AWG, one wire per terminal)

- Recommended Torque

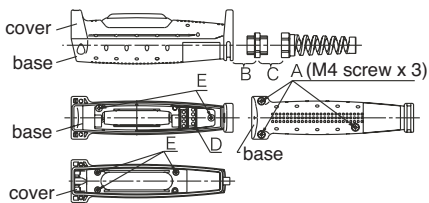

	See Drawing Above	Recommended Torque
Rubber Boot & Base	A	1.2±0.1Nm
Connector & Grip Switch	B	4.0±0.3Nm
Connector	C	4.0±0.3Nm
Terminal Screw	D	0.5±0.6Nm
Do Not Remove	E	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [Idec](#) manufacturer:*

Other Similar products are found below :

[LW1L-M1C10V-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M7E-HRN2](#) [67021K512](#) [67081K512X](#) [701PB580](#) [719-5504-000](#)  
[MDPSSGLFS](#) [810KSV30B](#) [FLT 2U EE 01A](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8646AB6X718UL](#)  
[8646ABUL](#) [FSDWH](#) [9001KXRK](#) [9001T8BK](#) [9533CD4+U574+U4922](#) [1203MRA](#) [A22EM01S](#) [A595](#) [1202A6](#) [12037A2ULCSA](#) [1203A2UL](#)  
[ABD122N-B](#) [1211390004](#) [ABN111-Y](#) [ABN400-R](#) [1211500044](#) [1211580012](#) [1212MRA](#) [1232A6NF](#) [RA3CSH6A](#) [1241.1183.7047](#)  
[1241.2511](#) [1241.3428](#) [1223A2ULCSA](#) [1223MRA](#) [1232AX2119](#) [1241.1183.8000](#) [1241.1183.8029](#) [1241.2506](#) [1241.2606](#) [12MA6](#)  
[1301940184](#) [RELBARF6X10\(PLASTIC\)](#)