

# FSP065-REBN2

65W AC/DC Adapter



Plug Type: øin 2.1 mm / øout 5.5 mm


**\*\*Meet ErP & PSE**



## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 19 V
- Output Current: 3.42 A
- Output Watts: 65 W
- Efficiency: 89.54%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 75°C

## Dimensions (Unit: mm)

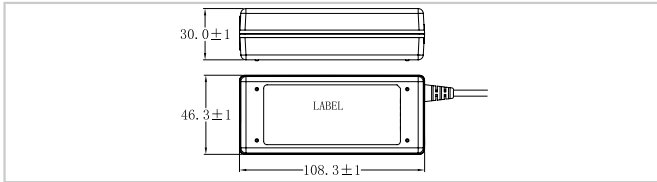

## Ordering Information

Part No.	Description
63040-010065-010-RS	19V 65W power adapter with Φ2.1/Φ5.5/lock 90~264 VAC input, ErP, PSE

# 63040-010060-020

60W AC/DC Adapter



Plug Type: øin 2.5 mm / øout 5.5 mm

**Medical**

**\*\*Meet ErP**



## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 5 A
- Output Watts: 60 W
- Efficiency: 85%
- Operating Temperature: 0°C ~ 60°C
- Storage Temperature: -40°C ~ 85°C


## Optional Cable



PN: CB-P1LP4-RS

20 cm cable for 5.5 x 2.5 DC Plug with screw

## Dimensions (Unit: mm)

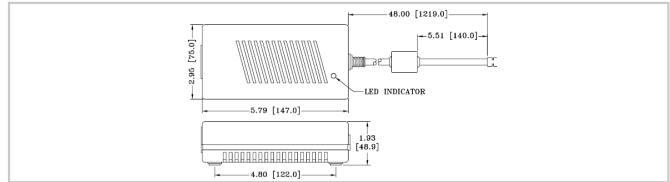


## Ordering Information

Part No.	Description
63040-010060-020-RS	12V 60W medical power adapter with Φ2.5/Φ5.5 90~264 VAC input, ErP

# FSP060-DIBAN2

60 W AC/DC Adapter



Plug Type: øin 2.5 mm / øout 5.5 mm

**\*\*Meet ErP & PSE**



## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 5 A
- Output Watts: 60 W
- Efficiency: 88.9%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 65°C

## Dimensions (Unit: mm)




## Ordering Information

Part No.	Description
63040-010060-120-RS	12 V 60W power adapter with lock screw 90~264 VAC input, ErP, PSE
63040-010060-130-RS	12V 60W power adapter with none lock 90~264 VAC input, ErP, PSE

# FSP036-RBBN2

36W AC/DC Adapter



Plug Type: øin 2.5 mm / øout 5.5 mm

**\*\*Meet ErP & PSE**



## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 3 A
- Output Watts: 36 W
- Efficiency: 86%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 70°C


## Optional Cable



PN: CB-P1LP4-RS

20 cm cable for 5.5 x 2.5 DC Plug with screw

## Dimensions (Unit: mm)

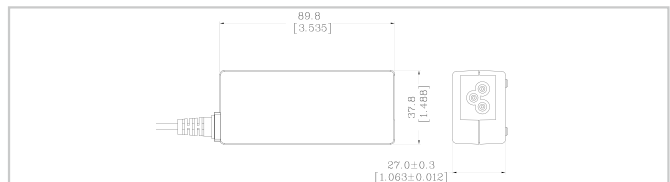

## Ordering Information

Part No.	Description
63040-010036-121-RS	12V 36W Power adapter with lock screw, 90~264VAC input, ErP, PSE
63040-010036-111-RS	12V 36W Power adapter without lock, 90~264VAC input, ErP, PSE

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Desktop AC Adapters](#) category:*

*Click to view products by [IEI](#) manufacturer:*

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [TRH21A120-49E03-Level-VI](#) [FWC100024A-11A](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [CENB1040A1245F02](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [PCM50UT04](#) [PCM50UT05](#) [Adapter 24V230W FSP230-AAAN3 WIRE FSP](#) [TRH100A240-11E12 VI](#) [TR70MB360-01E03 VI](#) [TRH50A240-11E01 VI](#) [TRE36A120-01G03 VI](#) [TRH100A180-11E12 VI](#) [AMA65DR4-120054Y](#) [AMA90DR4-240037Y](#) [AMA90DR5-120075Y](#) [AMA24DR4-120150Y](#) [AMA24DR5-120150Y](#) [AMA36DR4-120250Y](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07168](#) [CPSUNOTAKY-07169](#) [CPSUNOTAKY-07234](#) [CPSUNOTAKY-07236](#) [CPSUNOTAKY-07288](#) [CPSUNOTAKY-07312](#) [CPSUNOTAKY-07342](#)