


IDD-9364120A


120 W DC/DC Converter Module

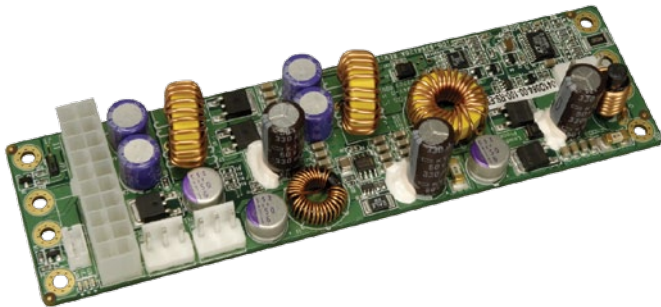

Features


1. Wide input range: 9-36 VDC
2. AT or ATX mode on/off
3. Output voltage protection
4. Up to 90% efficiency
5. RoHS compliant
6. Compact size

Dimensions (Unit: mm)

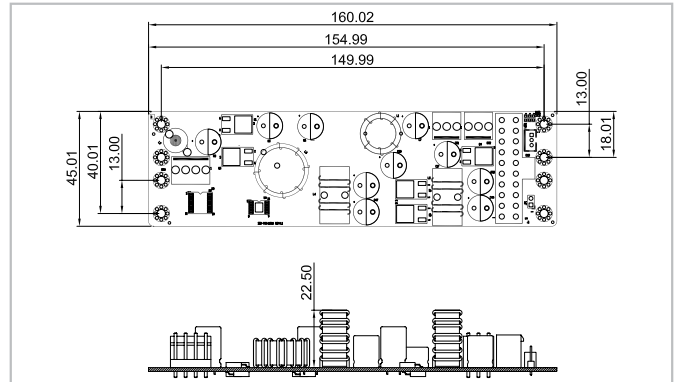

Specifications

- Output (max.): 12 V@4 A, 5 V@10 A, 3.3 V@8 A, -12 V@0.3 A & 5 VSB@2 A
Max. total output: 120 W
- Input: 9 VDC to 36 VDC
- Performance characteristics
Noise & ripple: <240 mV
Line regulation: <50 mV
Load regulation: <100 mV
Efficiency: Up to 90%
- Dimensions: 45 mm x 160 mm
- Weight: NW: 104 g
- Operating temperature: -20°C ~ 70°C
- Storage temperature: -25°C ~ 75°C



Packing Information

1 x IDD-9364120A

1 x QIG

Ordering Information

Part No.	Description
IDD-9364120A-R11	120 W DC/DC 9~36 V input, 12 V, 5 V, 3.3 V, -12 V & 5 VSB output
CB-JST3PSW-RS	30 cm cable on/off switch
CB-JST3P001-RS	30 cm 5 VSB, PS_ON wire to SBC
CB-3PSATA-RS	10 cm cable for SATA power
CB-3PIDE-RS	10 cm cable for IDE HDD power
CB-P1LP4-RS	20 cm cable for FSP0601AD101C 60 W/ UP0451E12P 45 W/ UP0251E12PL 25 W AC-DC adapter
CB-MD4P4-RS	16 cm cable for 63000-FSP120AAB-RS 120 W AC-DC adapter
CB-NOLP4-RS	20 cm cable for terminal block DC input
CB-ATX20P-RS	30 cm 20-pin ATX to 20-pin ATX cable

Pin Assignments

Input Power Connector

CN4	Pin 1	Pin 2	Pin 3	Pin 4
	VIN	VIN	GND	GND

Output Power Connector

CN1 CN2	Pin 1	Pin 2	Pin 3
	+5 V	GND	+12 V
J1	Standard 2-pins ATX		

ATX Mode Connector

CN3	Pin 1	Pin 2	Pin 3
	5 VSB	GND	PS_ON

Wire Harness Selection Guide

DC Input (CN4)



Options 1.

PN: **CB-P1LP4-RS**

Cable for FSP0601AD101C 60 W/ UP0451E12P 45 W/UP0251E12PL 25W AC-DC adapter



Options 2.

PN: **CB-MD4P4-RS**

Cable for 63000-FSP120AAB-RS 120 W AC-DC adapter



Options 3.

PN: **CB-NOLP4-RS**

Cable for terminal block

SBC Main Power (J1)



Options 1.

PN: **CB-ATX20P-RS**

20-pin ATX to 20-pin ATX cable

I/O Power (CN1 & CN2)



Options 1.

PN: **CB-3PSATA-RS**

Cable for SATA



Options 2.

PN: **CB-3PIDE-RS**

Cable for IDE HDD or any STD 4-pin I/O devices

Power On/Off (CN3)



Options 1.

PN: **CB-JST3PSW-RS**

Cable with on/off switch



Options 2.

PN: **CB-JST3P001-RS**

Cable to SBC (5 VSB & PS_ON)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialised Cables category](#):

Click to view products by [IEI manufacturer](#):

Other Similar products are found below :

[603PT6](#) [603SS6L](#) [604PT6](#) [604SS6](#) [706000D02F200](#) [910640](#) [1200740077](#) [1200740114](#) [AC172](#) [ACL-SSI-4](#) [R88ACAKA0015SRE](#)
[R88ACAWL005SDE](#) [R88ACRGD0R3C](#) [1300150047](#) [1300660036](#) [1302262116](#) [1300150149](#) [1300220020](#) [1300220104](#) [1300220119](#)
[1301240492](#) [1301810221](#) [1365323-1](#) [1613055](#) [176P12](#) [1971465-2](#) [20240400003](#) [20240400013](#) [2085828-1](#) [20886510030](#) [2-22733-8](#) [22733-](#)
[8](#) [CB-BATACC-RS](#) [CB-JST3PSW-RS](#) [25AC84](#) [25AK84X](#) [25AU25](#) [25FN82](#) [3011-03](#) [AC118](#) [ACL-HHS-1M\(CAT5E\)](#)
[SSL009PC2DC012N](#) [FC2A-KC6C](#) [2085828-2](#) [20886510150](#) [CCSFCBF2](#) [R88A-CRWB020N](#) [416216000-3](#) [426062900-3](#) [426064500-3](#)