


DRPC-W-JL

- Fanless DIN-Rail Embedded System
- Jasper Lake Intel® Celeron™ Solution (up to 4 cores)



Features

- Supported CPU:
Intel® N5105 2.0 GHz (up to 2.9 GHz, quad-core, TDP 10W)
- Support dual independent display
- 3 x 2.5GbE ports
- 1 x M.2 A Key
- 1 x M.2 B Key (with SIM card slot)




External fan module

Specifications


Model Name		DRPC-W-JL
Chassis	Color	Black
	Dimensions (WxDxH) (mm)	176 x 116 x 60.8
	System Fan	Fanless
	Chassis Construction	Extruded aluminum alloys
Motherboard	CPU	Intel® Celeron® N5105 2.0 GHz (up to 2.9 GHz, quad-core, TDP 10W)
	Chipset	SoC
	Memory	1 x DDR4 2933 MHz SO-DIMM (pre-installed 8GB) (up to 16GB)
Storage	HDD Bay	1 x 2.5" SATA 6Gb/s HDD bay
IO Interfaces	USB	2 x USB 3.2
	LAN	3 x 2.5GbE
	Display	1 x DP 1 x HDMI
	Others	1 x Power button, 1 x Reset button, 1 x Power LED, 1 x HDD LED, 1 x System fan connector
Internal Expansions	PCIe Mini	N/A
	M.2	1 x M.2 A Key 2230 for WIFI & BT (optional) 1 x M.2 B Key (PCIe x2) 2242/2280 w/SIM slot for 5G (optional)
Power	Power Input	12V DC
	Power Consumption	12V@2.45A (Intel N5105 with 16GB DDR4 memory)
Reliability	Mounting	DIN-Rail
	Operating Temperature	-20°C ~ 60°C with airflow, 10% ~ 95% non-condensing
	Storage Temperature	-30°C ~ 85°C, 10% ~ 95% non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 3 shocks per axis
	Operating Vibration	MIL-STD-810F 514.5C-2
	Weight (Net/Gross)	0.91/1.16 kg
	Safety/EMC	CE/FCC
Watchdog Timer	Programmable 1 ~ 255 sec/min	
OS	Supported OS	Microsoft® Windows 10 / 11, Linux

Fully Integrated I/O


Front View

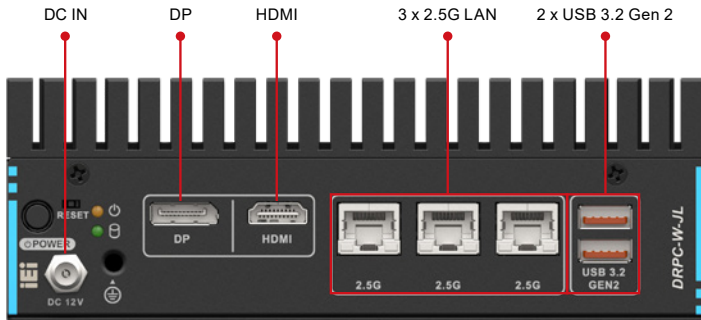

Top View

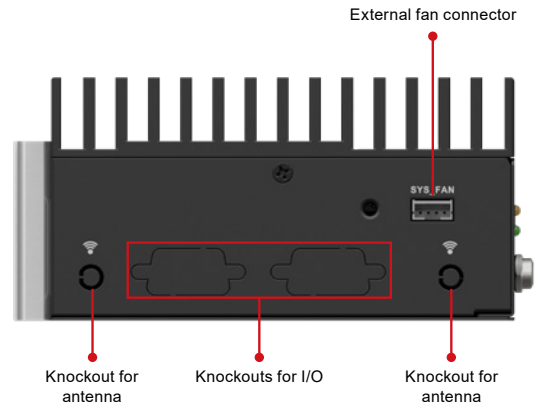

Dimensions (Unit: mm)

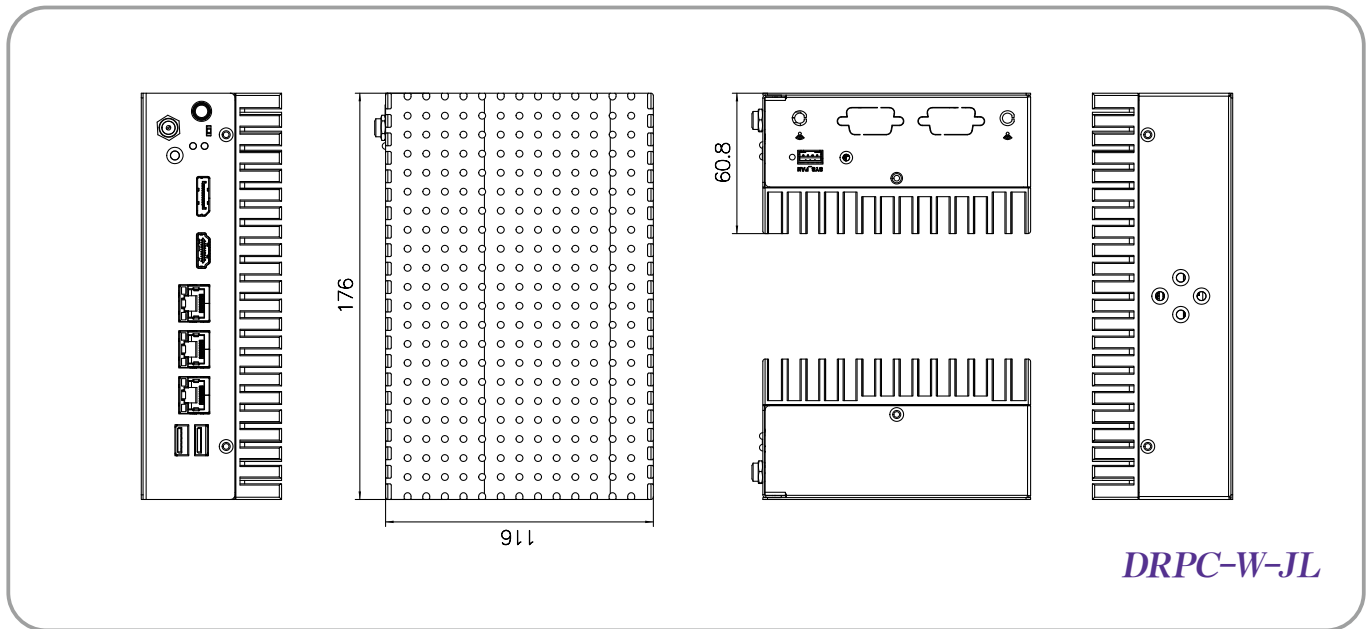

Ordering Information

Part No.	Description
DRPC-W-JL-NC-R10	Fanless System with Intel® Celeron™ N5105 up to 2.9 GHz TDP 10W, 3 x 2.5GbE Lan, 1 x HDMI, 1 x DP, 8GB memory pre-installed, 12V DC, RoHS

Options

Item	Part No.	Description
Adapter	63040-010060-211-RS	Adapter Power;FSP:FSP060-DHAN3;9NA0608097;;Vin:90~264VAC;60W;Dim:62.0*110*31.5mm;Plug=7.5mm;Cable=1200mm;Erp(NO LOAD 0.21W);Vout:12VDC;Φ2.5/Φ5.5/lock;CCL;RoHS
Wifi Kit	EMB-WIFI-KIT02I3-R10	2T2R M.2 wifi module kit for embedded system, IEEE802.11a/b/g/n/ac/ax, 1 x M.2 AE Key Wireless LAN & Bluetooth 5.2;Intel;AX210.NGWG Module, 2 x RF cable, 2 x Antenna; RoHS
Fan Kit	SF-DRPC-W-R10	External fan for DRPC-W Series
COM Cable	32005-003500-200-RS	ROUND CABLE;RS-232/422/485;RS-232 CABLE;2;250MM;26AWG;(A)D-SUB 9P MALE+HEXAGONAL SCREW;(B) MOLEX 51021-0900 P=1.25;Wins Precision;RoHS

Packing List

1 x DIN-rail mounting kit	1 x Screw pack	1 x SATA cable with power cable
---------------------------	----------------	---------------------------------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[1062-2900](#) [1130669](#) [1130682](#) [1141843](#) [1147464](#) [1147739](#) [114991750](#) [1158231](#) [1158235](#) [1158241](#) [1158243](#) [1158244](#) [1158245](#) [1158247](#)
[1158252](#) [1272687](#) [1272688](#) [2-A0DF-2001](#) [AIE100-903-FL](#) [AIIIS-1240-00A1E](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [AMAX-5580-74000A](#) [AMAX-5580-C3000A](#) [AMOS-3005-1Q12A1](#) [AMOS-820-2Q10A1](#) [AMOS-825-1Q10A1](#) [AMS300-RAY](#) [APAX-5580-4C3AE](#) [ARK-1122HS-S6A1E](#) [ARK-20-S8A1E](#) [ARK-2121V-S3A1E](#) [ASM30002](#) [AVS-240-00A1E](#) [AVS-540-00A1E](#)
[BKCM8i3CB4N](#) [BKCM8i7CB8N](#) [BKCM8v5CB8N](#) [BKCM8v7CB8N](#) [BKCMA1BB](#) [BKCMB1ABA](#) [BKCMB1ABB](#) [BKNUC9V7QNB](#)
[BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [BKNUC9VXQNB](#) [BKNUC9VXQNX](#) [BKNUC9VXQNX1](#) [BNUC11TNBI30000](#)