
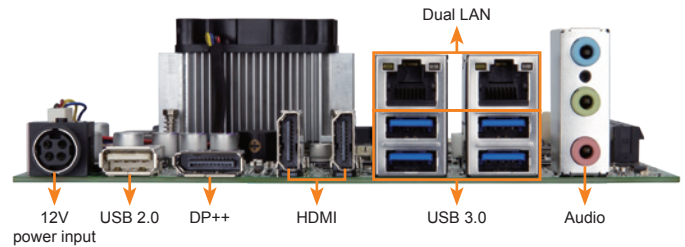
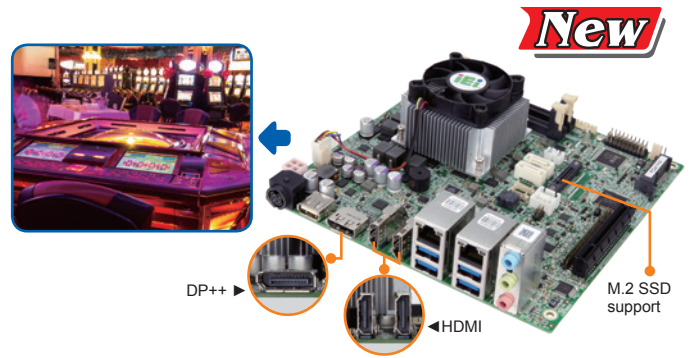


gKINO-DMF

Mini-ITX SBC supports AMD Merlin Falcon SoC Processor, HDMI 2.0, M.2, PCIe Mini, SATA 6Gb/s, USB 3.0, HD audio and RoHS

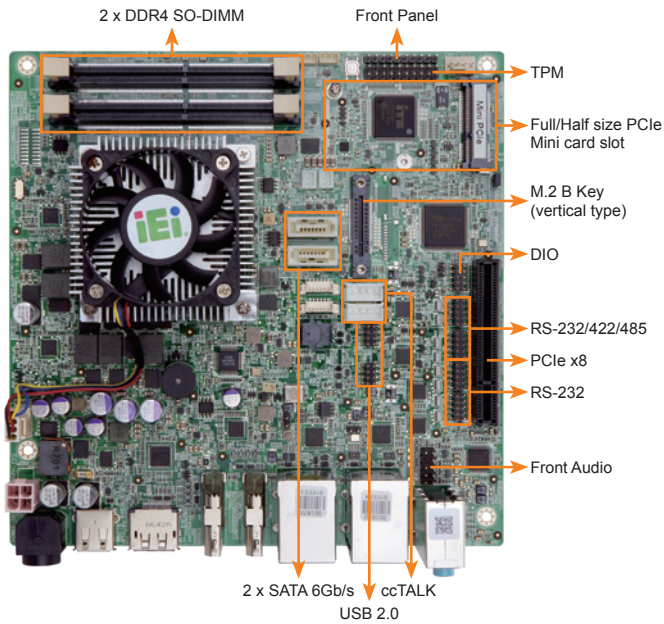

Specifications

- ◆ SoC
 - FP4 BGA supports AMD Merlin Falcon SoC
 - RX-421BD on-board SoC (2.1GHz, quad-core, 2MB cache, TDP=35W)
 - RX-216GD on-board SoC (1.6GHz, quad-core, 1MB cache, TDP=15W)
- ◆ BIOS
 - UEFI BIOS
- ◆ Memory
 - Two 260-pin 2400MHz dual-channel DDR4 non-ECC unbuffered SO-DIMMs support up to 64 GB
- ◆ Graphics Engine
 - AMD Radeon HD 10000graphic,3rd Gen. graphic core,support DX 12, HSA 2.0
 - UVD v6 decode for H.265 MPEG2/4, VC-1, MVC
 - VCE v3.1 encode for H.254 VCE
- ◆ Display Output
 - Triple independent display
 - 2 x HDMI 1.4 (up to 4096x2160@24Hz)
 - 1 x DP++ (up to 3840x2160@60Hz)
- ◆ Ethernet
 - Dual GbE RTL 8111GN
- ◆ External I/O Interface
 - 4 x USB 3.0
 - 1 x USB 2.0
- ◆ Internal I/O Interface
 - 1 x MicroSD card slot
 - 2 x RS-232 (2x5 pin, P=2.0)
 - 2 x RS-232 (support Cctalk, TTL)(1x4 pin, P=2.54)
 - 4 x USB 2.0 (2x4 pin, P=2.0)
 - 2 x SATA with 5V/12V output
- ◆ Audio
 - Realtek ALC862 HD audio codec
 - 3 x Audio jacks (line-out, line-in, mic-in) on rear IO
 - 1 x Front audio (2x5-pin)
- ◆ Front Panel
 - 1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED
 - 2 x LAN LED (1x2 pin)
- ◆ SMBUS
 - 1 x SMBus (1x4 pin)
- ◆ I²C
 - 1 x I²C (1x4 pin)
- ◆ TPM
 - 1 x TPM (2x10 pin)
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Expansion
 - 1 x PCIe x 8 slot
 - 1 x Full size PCIe Mini card slot
- ◆ Watchdog Timer: Software programmable, supports 1~255 sec. system reset
- ◆ Chassis Intrusion Detection: 1 x Chassis intrusion connector (1x2 pin)
- ◆ Power Supply
 - 12V DC input
 - 1 x Internal power connector (2x2 pin)
 - Support AT/ATX mode
 - 1 x External DC jack (4-pin DIN)
- ◆ FAN Connector
 - 1 x CPU smart fan (1x4 pin)
 - 1 x System smart fan (1x4 pin)
- ◆ Power Consumption
 - 12V@5.54A (AMD RX-421BD 2.1GHz CPU with 2400 MHz 16GB DDR4 memory)
- ◆ Storage Temperature: -10°C ~ 70°C
- ◆ Operating Temperature: 0°C ~ 60°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 170mm x 170 mm
- ◆ Weight: GW: 1100g / NW: 700g
- ◆ CE/FCC compliant



Features

- Mini ITX form factor with AMD Merlin Falcon processor supports dual-channel DDR4 SO-DIMMs
- Triple independent display support via dual HDMI and DP++
- Full size PCIe Mini slot and vertical type M.2 B key slot for expansion
- COM, Cctalk, TTL, and USB 3.0support
- IEI one key recovery solution allows you to create rapid OS backup and recovery

Packing List

- 1 x gKINO-DMF single board computer with CPU cooler
- 1 x SATA cable
- 1 x I/O shielding
- 1 x QIG

Ordering Information

Part No.	Description
gKINO-DMF-421-R10	Mini-ITX SBC supports AMD RX-421BD on board SoC (quad-core 2.1GHz, 35W), DDR4 ,triple independent displays,HDMI/DP, dual GbE, SATA 6Gb/s, USB3.0, PCIe Mini, M.2,HD audio and RoHS
gKINO-DMF-216-R10	Mini-ITX SBC supports AMD RX-216GD on board SoC (dual-core 1.6GHz, 15W), DDR4 ,triple independent displays, HDMI/DP, dual GbE, SATA 6Gb/s, USB3.0, PCIe Mini, M.2, HD audio and RoHS
19800-000300-100-RS	RS-232 cable with bracket, 300mm, P=2.0
CB-USB02A-RS	Dual-port USB cable with bracket, 300mm, P=2.0
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)
[S16M-IND](#)