

IGCME-1300-R11

PCIe Mini VGA Adapter Card, RoHS

IEI Scalable Display Solution

The IGCME-1300 is applied to expand one VGA port for the IEI motherboard with a PCIe Mini slot for multiple display applications.

Features


- Support PCIe VGA/2D controller, 1920x1200@60Hz 32bpp
- DDR3 SDRAM supports up to 800 MHz speed
- Compliant with PCI Express Mini specification 1.2

Specifications


- ◆ Form Factor
PCI Express Mini card
- ◆ Display Controller
Aspeed AST1400
- ◆ Internal Connector
1 x 10-pin (2x5) box header by 2.0mm pitch
- ◆ Compatible OS
Win7/Win8/Server 2003/Server 2008/Server 2012
Linux kernel version 2.6.32 above
- ◆ Power Supply
On-board 3.3V
- ◆ Operating Temperature
-10°C ~ 60°C
- ◆ Operating Humidity
5% ~ 95%, non-condensing
- ◆ Dimensions (LxW)
50mm x 30mm
- ◆ Weight
70g
- ◆ CE/FCC compliant

Packing List

1 x IGCME-1300 PCIe Mini VGA adapter card	1 x QIG
VGA cable, 600 mm length (Pitch=2.0mm) (P/N: 32003-001500-100-RS)	

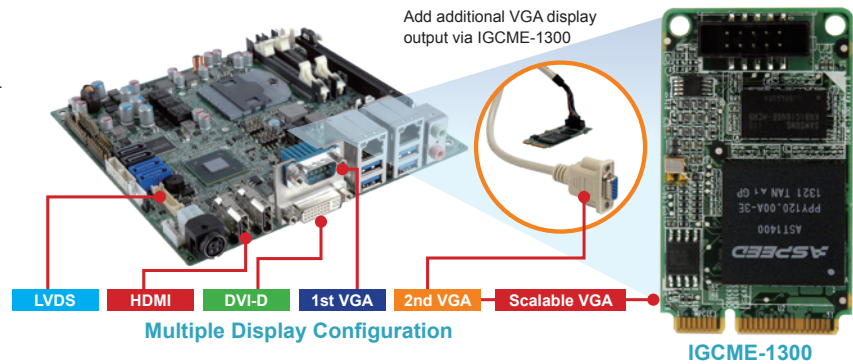

Dimensions (mm)

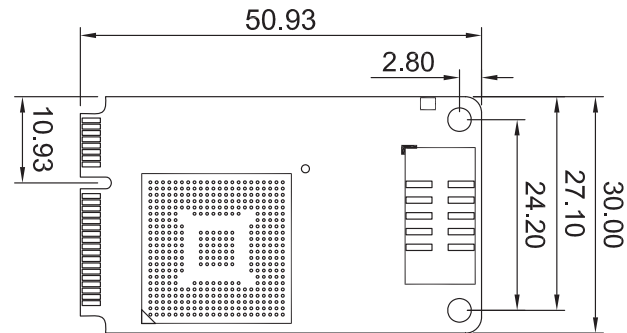


Ordering Information

Part No.	Description
IGCME-1300-R11	PCIe Mini VGA adapter card, RoHS


MPCIE-USB3

PCIe Mini USB 3.0 Adapter Card, RoHS

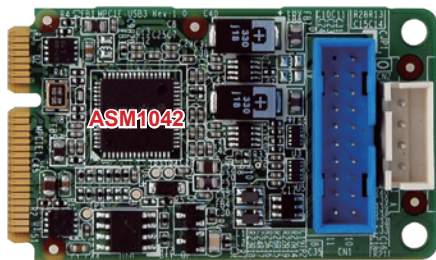

IEI USB 3.0 Expanded Solution

The MPCIE is applied to add additional super speed USB 3.0 ports for the motherboard with a PCIe Mini slot.

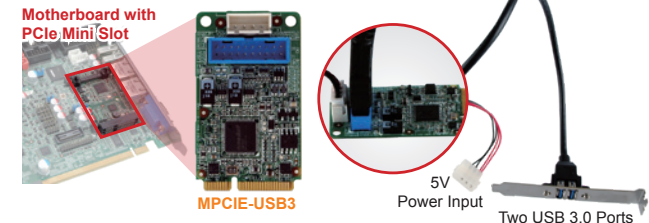

Specifications

- ◆ Form Factor
PCI Express Mini card
- ◆ USB 3.0 Controller
Asmedia ASM1042A
- ◆ Internal Connector
1 x 20-pin (2x10) box header
- ◆ Power Jack
1 x 4-pin box header
- ◆ Compatible OS
Windows® XP/Server 2003/Server 2008/Vista/7/8.1/10
Linux kernel version 2.6.32 above
- ◆ Operating Temperature
-10°C ~ 60°C
- ◆ Operating Humidity
5% ~ 95%, non-condensing
- ◆ Dimensions (LxW)
50 mm x 30 mm
- ◆ Weight
70g
- ◆ CE/FCC compliant

Packing List

1 x MPCIE-USB3 PCIe Mini USB 3.0 adapter card	
1 x Dual USB 3.0 type A port cable with bracket	
1 x Power cable	1 x QIG


Ordering Information

Part No.	Description
MPCIE-USB3-R11	PCIe Mini USB 3.0 adapter card, RoHS
19800-010500-200-RS	Dual USB 3.0 type A port cable with bracket

Features

- Supports two external USB 3.0 type A ports
- USB 3.0 provides up to 5Gbps of transferring rate
- Backward compatible with USB 2.0 and USB 1.0/1.1 devices
- Fully compliant with USB 3.0 rev 1.0 specifications and Intel® xHCI rev 0.96 specifications, with transfer rates up to 5Gbps
- Compliant with PCI Express Mini specification 1.2

Dimensions (mm)

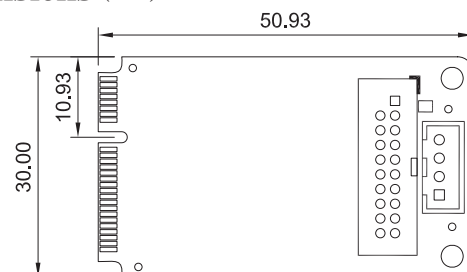

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Video Modules](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[conga-HDMI ADD2 Card](#) [96VG-2G-PE-MA2](#) [PCIe-CPL64](#) [PCIe-GIE74](#) [PCIe-GIE74 PRO](#) [PCIe-GIEIMX](#) [PCIe-GIENVQ](#) [DVP-7011HE](#)
[DVP-7031HE](#) [DVP-7633HE](#) [DVP-7634HE](#) [HDC-502E-R10](#) [HDC-701EL-R10](#) [IGCME-1300-R11](#) [NS-CA001](#) [NS-CA002](#) [DVP-7630HE](#)
[DVP-7635E](#) [DVP-7633E](#) [DVP-7030HE](#) [DVP-7014HE](#) [DVP-7012HE](#) [DVP-7610HE](#) [DVP-7641E](#) [SEN-16299](#)