


IVCE-C608

PCIe video/audio capture card with 8-channel video/audio input, total 240fps for 8 channels (NTSC)

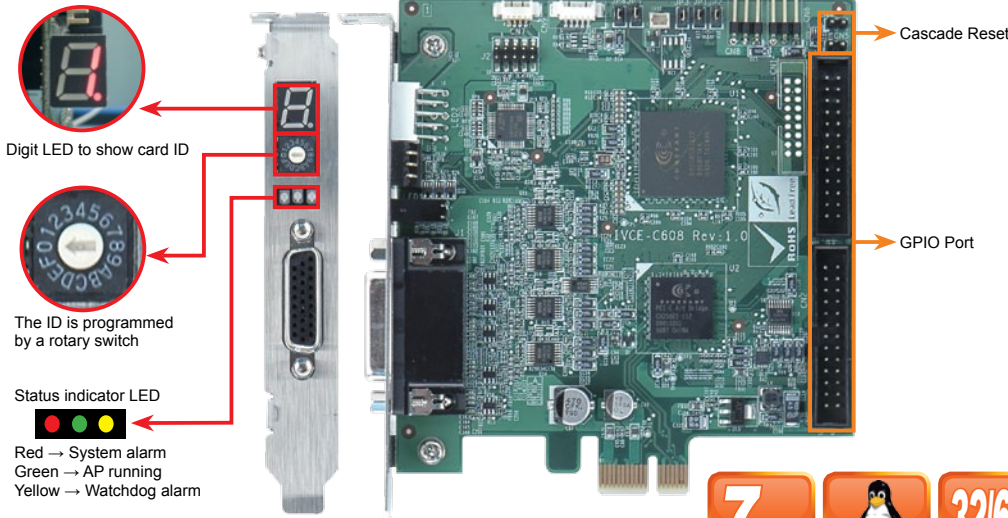

Specifications

Interface

| | |
|-------------------|---|
| Video Input | 8 channels composite video NTSC/PAL auto sensing |
| Video Input Type | BNC (BNC+RCA to DB-26 cable included) |
| Audio Input | 8 channels |
| Audio Input Type | RCA (BNC+RCA to DB-26 cable included) |
| Video Output | 2 channels |
| Video Output Type | BNC (BNC+RCA to DB-26 cable included) |
| Bus Interface | PCIe x1 |
| Alarm I/O | Yes |
| Card ID | Rotary switch selectable with LED for ID indication |
| LED Indicator | Red LED for system Green LED for AP running Yellow LED for watchdog |

Video Processing

| | | |
|-------------------|-----------------------------------|-----------|
| Video Compression | Software compression | |
| Video Engine | 1 x Conexant CX25853 | |
| Resolution | NTSC: | PAL: |
| | 720 x 576 | 720 x 576 |
| | 720 x 480 | 720 x 480 |
| | 720 x 288 | 720 x 288 |
| | 720 x 240 | 720 x 248 |
| | 352 x 240 | 352 x 288 |
| Frame Rate | NTSC: Total 240fps for 8 channels | |
| | PAL: Total 200fps for 8 channels | |

Audio Processing

| | |
|-------------------|---|
| Audio Compression | Software compression |
| Sampling Rate | 32kHz, 44.1kHz, 48kHz, 96kHz (hardware spec.) |
| Quantization | 24-bit (hardware spec.) |

System Requirement

| | |
|----------------|--|
| Platform | x86 PC compatible computer, PCI Express 1 lane, compatible with 1, 4, 8 and 16 lane PCIe slots |
| Memory | 512MB or above |
| OS Environment | Windows® XP, Windows® 7, Linux Kernel 3.1 |

Others


| | |
|-----------------------|------------------------------|
| Dimensions | 111 mm x 102.4 mm |
| Operating Temperature | 0°C ~ 65°C, non-condensing |
| Power Consumption | 5.3W (3.3V@1.39A, 12V@0.06A) |

Features

- Single card 8-channel solution
- PCI Express interface provides higher bandwidth and great performance
- Compatible with Linux, Windows® XP and Windows® 7 (32-bit and 64-bit)
- Total 240fps for 8 channels (NTSC)
- Supports multiple cards up to 128 channels video/audio input
- External GPIO daughter board supports up to 8 inputs and 8 outputs (optional)
- SDK available for customer to create customized applications
- Supports 8 channels video/audio input and 2 channels video output

Packing List

| | |
|---------------------------------|----------------|
| 1 x IVCE-C608 capture card | |
| 1 x Video/Audio input cable kit | 1 x Utility CD |
| 1 x Reset cable | 1 x QIG |

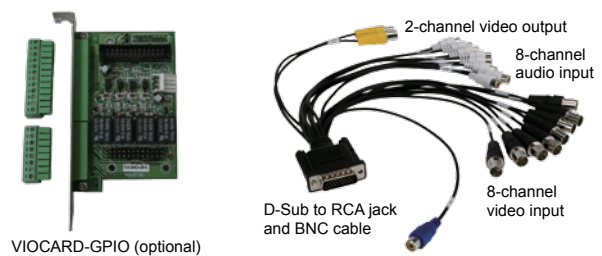

Ordering Information

| Part No. | Description |
|---------------------|---|
| IVCE-C608-R10 | PCIe video/audio capture card with 8-channel video/audio input, total 240fps@D1 for 8 channels (NTSC) |
| VIOCARD-GPIO-RS-R10 | 8 GPIO channels (4 digital inputs and 4 relay outputs) |
| 32225-002200-100-RS | GPIO card to IVC capture card connection cable |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Video Modules](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[conga-HDMI ADD2 Card](#) [96VG-2G-PE-MA2](#) [PCIe-CPL64](#) [PCIe-GIE74](#) [PCIe-GIE74 PRO](#) [PCIe-GIEIMX](#) [PCIe-GIENVQ](#) [DVP-7011HE](#)
[DVP-7031HE](#) [DVP-7633HE](#) [DVP-7634HE](#) [HDC-502E-R10](#) [HDC-701EL-R10](#) [IGCME-1300-R11](#) [NS-CA001](#) [NS-CA002](#) [DVP-7630HE](#)
[DVP-7635E](#) [DVP-7633E](#) [DVP-7030HE](#) [DVP-7014HE](#) [DVP-7012HE](#) [DVP-7610HE](#) [DVP-7641E](#) [SEN-16299](#)