


MPCIE-UART-KIT01-R20

PCI Express Mini Card Supports
Quad-port RS-232/422/485, Full
Size, RoHS

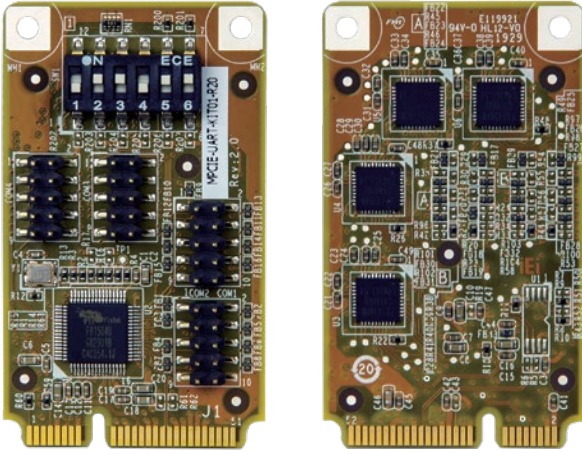


Specifications

- ◆ Form Factor: PCI Express Mini card
- ◆ PCI Express Bridge to Quad Serial Port: Fintek F81504
- ◆ Buffer/Transceiver Series: F81439
- ◆ IO: 4 x RS-232/422/485 (2x5 pin header)
- ◆ Operating Temperature: 0°C ~ 60°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions (LxW): 51 mm x 30 mm
- ◆ Weight: GW: 100g / NW: 50g
- ◆ CE/FCC compliant

Features

- PCI Express Mini supports quad-port RS-232/422/485
- 128 bytes transmit/receive FIFO
- High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- Baud rate supports 115.2K, max. up to 1.5M

Dimensions (mm)

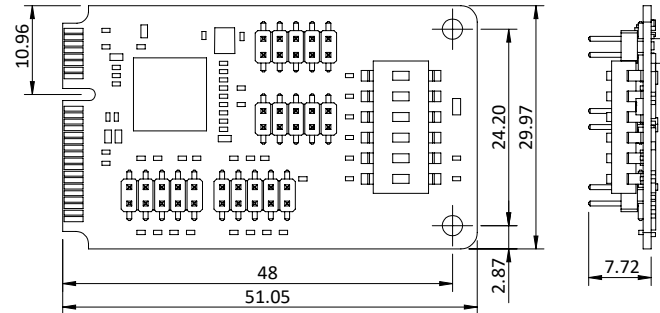

Packing List


1 x MPCIE-UART-KIT01 module	
4 x D-SUB9 male cable	1 x QIG

Ordering Information

Part No.	Description
MPCIE-UART-KIT01-R20	PCI Express Mini card supports quad-port RS-232/422/485, full size, RoHS
E-MPCIE-UART-KIT01-R20	PCI Express Mini supports quad RS-232/422/485 port module, full size, for E-Window, RoHS

MPCIE-UART-KIT02-R20

PCI Express Mini Card Supports
Dual-port RS-232/422/485, 16-bit
GPIO, Full Size, RoHS

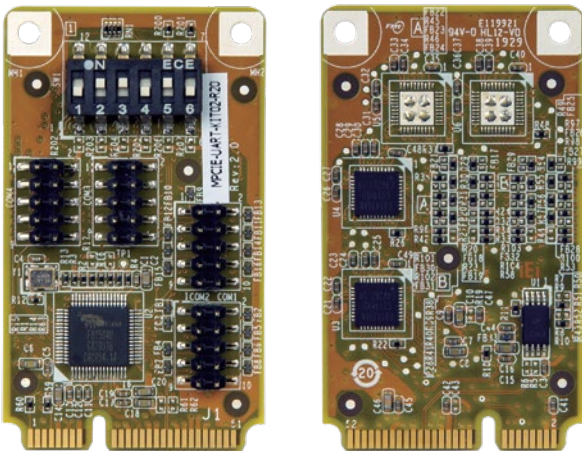


Specifications

- ◆ Form Factor: PCI Express Mini card
- ◆ PCI Express Bridge to Quad Serial Port: Fintek F81504
- ◆ Buffer/Transceiver Series: F81439
- ◆ IO
2 x RS-232/422/485 (2x5 pin header)
2 x 8 bit GPIO (2x5 pin header)
- ◆ Operating Temperature: 0°C ~ 60°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions (LxW): 51 mm x 30 mm
- ◆ Weight: GW: 100g / NW: 50g
- ◆ CE/FCC compliant

Features

- PCI Express Mini supports dual RS-232/422/485 and 16-bit GPIO ports
- 128 bytes transmit/receive FIFO
- High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- Baud rate supports 115.2K, max. up to 1.5M
- All GPIO supports digit IO for input/output control, output data control, input status
- Support High/Low Level/Pulse, Open Drain/Push Pull function selection

Dimensions (mm)

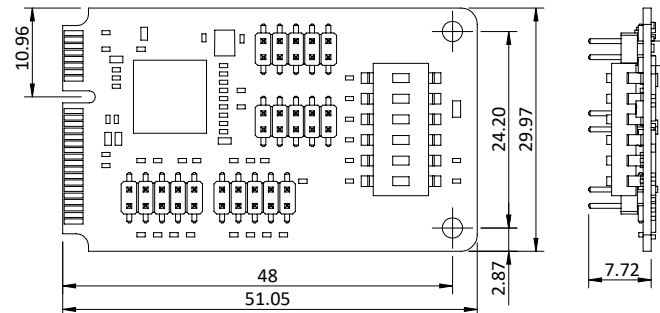

Packing List

1 x MPCIE-UART-KIT02 module	
2 x D-SUB 9 male cable	1 x QIG

Ordering Information

Part No.	Description
MPCIE-UART-KIT02-R20	PCI Express Mini card supports dual-port RS-232/422/485, 16-bit GPIO, full size, RoHS
E-MPCIE-UART-KIT02-R20	PCI Express Mini supports dual RS-232/422/485, 16 bit GPIO module, full size, for E-Window, RoHS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[FAB118](#) [60003-002](#) [FC6A-PC3](#) [60016-023](#) [HPCI-14S12U](#) [cBP-3208](#) [PCE-DP10-00A1E](#) [60016-024](#) [60016-022](#) [60016-005](#) [60016-002](#)
[60006-004](#) [K6CMISZBI52](#) [60011-093](#) [ADAM-4541-C](#) [ADAM-4510S-F](#) [ADC-30AB](#) [BBA](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#)
[112095-5118](#) [1020882](#) [1021056](#) [1021058](#) [1021080](#) [73-544-002](#) [UC-313](#) [UC-357](#) [485LDRC9](#) [485OPDRI](#) [U442-DOCK1](#) [UH104](#) [US-257](#)
[VESP211-232](#) [422LP9R](#) [422PP9R](#) [422PP9TB](#) [4850PDRHS](#) [US-279](#) [HW-FMC-XM105-G](#) [HP-USB-14](#) [UEXTX5](#) [2316379](#) [2316382](#) [B126-](#)
[1A1](#) [2465](#) [301-1001-11](#) [301-1001-31](#) [301-1002-98](#) [U444-06N-DP-C](#)