

# IGCME-1300-R11

PCIe Mini VGA Adapter Card, RoHs

### IEI Scalable Display Solution

The IGCME-1300 is applied to expand one VGA port for the IEI motherboard with a PCIe Mini slot for multiple display applications.

### Features


- Support PCIe VGA/2D controller, 1920x1200@60Hz 32bpp
- DDR3 SDRAM supports up to 800 MHz speed
- Compliant with PCI Express Mini specification 1.2

### Specifications


- ◆ Form Factor  
PCI Express Mini card
- ◆ Display Controller  
Aspeed AST1400
- ◆ Internal Connector  
1 x 10-pin (2x5) box header by 2.0mm pitch
- ◆ Compatible OS  
Win7/Win8/Server 2003/Server 2008/Server 2012  
Linux kernel version 2.6.32 above
- ◆ Power Supply  
On-board 3.3V
- ◆ Operating Temperature  
-10°C ~ 60°C
- ◆ Operating Humidity  
5% ~ 95%, non-condensing
- ◆ Dimensions (LxW)  
50mm x 30mm
- ◆ Weight  
70g

### Packing List

1 x IGCME-1300 PCIe Mini VGA adapter card	1 x QIG
VGA cable, 600 mm length (Pitch=2.0mm) (P/N: 32003-001500-100-RS)	

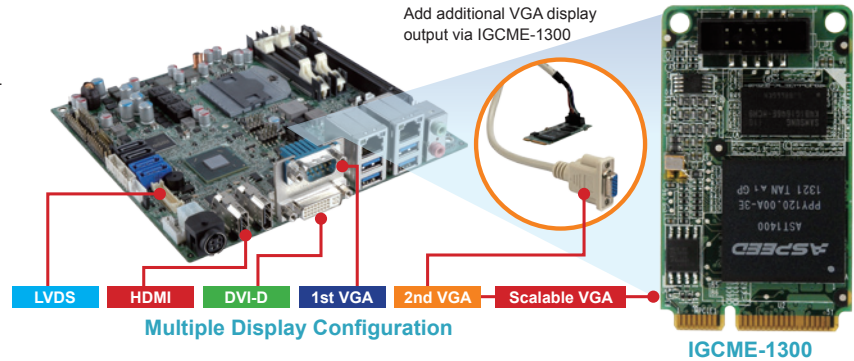

### Dimensions (mm)

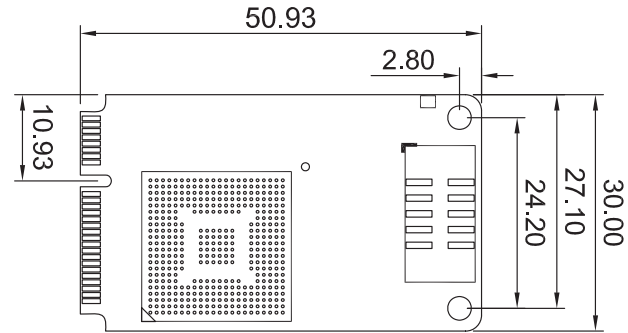


### Ordering Information

Part No.	Description
IGCME-1300-R11	PCIe Mini VGA adapter card, RoHs

# MPCIE-USB3


PCIe Mini USB 3.0 Adapter Card, RoHs

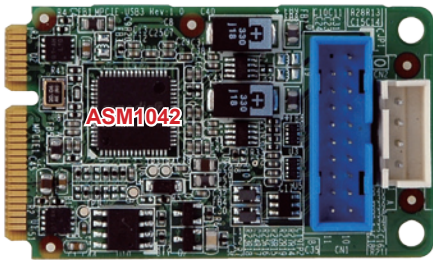

### IEI USB 3.0 Expanded Solution

The MPCIE is applied to add additional super speed USB 3.0 ports for the motherboard with a PCIe Mini slot.

Motherboard with PCIe Mini Slot



### Specifications

- ◆ Form Factor  
PCI Express Mini card
- ◆ USB 3.0 Controller  
Asmedia ASM1042A
- ◆ Internal Connector  
1 x 20-pin (2x10) box header
- ◆ Power Jack  
1 x 4-pin box header
- ◆ Compatible OS  
Windows® XP/Server 2003/Server 2008/Vista/7/8.1/10  
Linux kernel version 2.6.32 above
- ◆ Operating Temperature  
-10°C ~ 60°C
- ◆ Operating Humidity  
5% ~ 95%, non-condensing
- ◆ Dimensions (LxW)  
50 mm x 30 mm
- ◆ Weight  
70g

### Packing List

1 x MPCIE-USB3 PCIe Mini USB 3.0 adapter card	
1 x Dual USB 3.0 type A port cable with bracket	
1 x Power cable	1 x QIG


### Ordering Information

Part No.	Description
MPCIE-USB3-R11	PCIe Mini USB 3.0 adapter card, RoHs
19800-010500-200-RS	Dual USB 3.0 type A port cable with bracket

### Features

- Supports two external USB 3.0 type A ports
- USB 3.0 provides up to 5Gbps of transferring rate
- Backward compatible with USB 2.0 and USB 1.0/1.1 devices
- Fully compliant with USB 3.0 rev 1.0 specifications and Intel® xHCI rev 0.96 specifications, with transfer rates up to 5Gbps
- Compliant with PCI Express Mini specification 1.2

### Dimensions (mm)

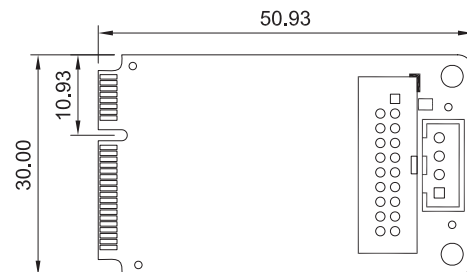

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Interface Modules](#) category:*

*Click to view products by [IEI](#) manufacturer:*

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [PCE-DP10-00A1E](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#)