



NANO-BTW2 BT-i1

EPIC SBC supports 22nm Intel® Atom™/Celeron® on-board SoC with VGA, HDMI, LVDS, Dual Intel® PCIe GbE, USB 3.2 Gen 1 (5Gb/s), Dual PCIe Mini, SATA 3Gb/s, mSATA, COM, Audio and RoHS

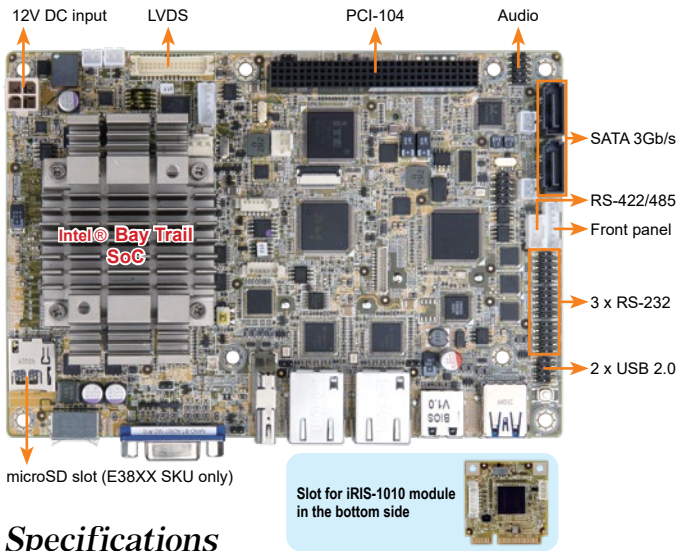


Highly efficient and power optimized multi-format codec engine

- Full HW Acceleration for Video Decoding
H.264, VC1 MPEG2, MVC, VP8, MPEG-4/H.263 MJPEG formats

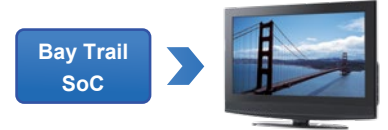

- Video Encoding
» Full HW acceleration for H.264
» Hybrid HW acceleration of MPEG2

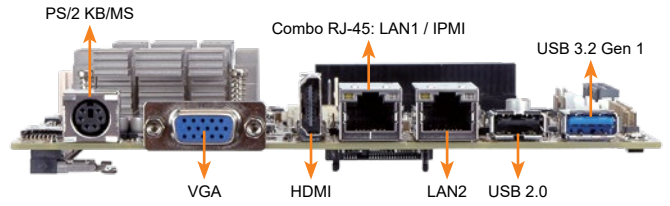

Specifications

- ◆ SoC
Intel® Atom™ E3827 on-board SoC (1.75GHz, dual-core, 1MB cache, TDP=8W)
Intel® Atom™ E3826 on-board SoC (1.46GHz, dual-core, 1MB cache, TDP=7W)
Intel® Atom™ E3815 on-board SoC (1.46GHz, single-core, 512KB cache, TDP=5W)
Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W)
Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
- ◆ BIOS
AMI UEFI BIOS
- ◆ Memory
One 204-pin 1333/1066 MHz single-channel unbuffered DDR3L SDRAM SO-DIMM supports up to 8 GB (J1900, N2930, E3827, E3826, E3815) or 4 GB (N2807)
- ◆ Graphics Engine
Intel® HD Graphics Gen 7 Engine with four execution units, supporting DX11.1, OpenGL 4.2 and OpenCL 1.2
- ◆ Display Output
Dual independent display
1 x VGA (up to 2560x1600@60 Hz)
1 x HDMI (up to 1920x1080@60 Hz)
1 x 18/24-bit dual-channel LVDS (up to 1920x1200@60Hz)
- ◆ Ethernet
» NANO-BT-i1
LAN1: Intel® I210-AT PCIe controller with NCSI support
LAN2: Intel® I211-AT PCIe controller
» NANO-BT-E38XX1W2
LAN1: Intel® I210-IT PCIe controller with NCSI support
LAN2: Intel® I210-IT PCIe controller
- ◆ External I/O Interface
1 x PS/2 KB/MS
1 x USB 2.0
1 x USB 3.2 Gen 1 (5Gb/s)
- ◆ Internal I/O Interface
1 x RS-422/485 (1x4 pin, P=2.0)
2 x SATA 3Gb/s with 5V SATA power connector (no RAID)
2 x USB 2.0 (2x4 pin, P=2.0)
3 x RS-232 (2x5 pin, P=2.0)
- ◆ iRIS Remote Management Module: 1 x iRIS-1010 slot
- ◆ SMBus: 1 x SMBus (1x4 pin)
- ◆ Audio
Realtek ALC662 HD Audio codec
1 x Front audio (2x5 pin)
- ◆ Front Panel
1 x Power LED & HDD LED (1x6 pin)
1 x Power button (1x2 pin)
1 x Reset button (1x2 pin)
- ◆ LAN LED: 2 x LAN LED (1x2 pin)
- ◆ Expansion
1 x Full-size PCIe Mini card slot (support mSATA co-lay SATA port 2)
1 x PCI-104 slot (PCI signal)
1 x microSD slot (E38XX SKU only)
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
1 x CPU smart fan (1x3 pin)
1 x System smart fan (1x3 pin)
- ◆ Power Supply
12V only DC input
1 x Internal power connector (2x2 pin)
Support AT/ATX mode
- ◆ Power Consumption
12V@1.52A (Intel® Atom™ processor J1900 with one 8 GB 1333 MHz DDR3 memory)
- ◆ Watchdog Timer: Software programmable, support 1~255 sec. system reset
- ◆ Operating Temperature: -20°C ~ 60°C, -40°C ~ 85°C (NANO-BT-E38XX1W2)
- ◆ Storage Temperature: -30°C ~ 70°C, -40°C ~ 85°C (NANO-BT-E38XX1W2)
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 115mm x 165mm
- ◆ Weight: GW: 850g / NW: 350g
- ◆ CE/FCC compliant



Features

- EPIC SBC supports 22nm Intel® Atom™ or Celeron® on-board SoC
- Supports dual independent display with LVDS, VGA and HDMI
- 1.35V DDR3L 1333/1066 MHz SDRAM support up to 8 GB
- Support IPMI 2.0 with iRIS-1010 module

Packing List

1 x NANO-BT single board computer with heatsink	
1 x Power cable	2 x SATA with power cable kit
2 x RS-232 cable	1 x QIG

Ordering Information

Part No.	Description
NANO-BT-E38XX1W2-R11**	EPIC SBC supports Intel® 22nm single-Core Atom™ E381XX on-board SoC with VGA/HDMI/LVDS, Dual PCIe GbE, Dual PCIe Mini, USB 3.2 Gen 1 (5Gb/s), SATA 3Gb/s, mSATA, COM, audio and RoHS, -40~85°C
NANO-BT-i1-J19001-R11	EPIC SBC supports Intel® 22nm quad-core J1900 2.0GHz (10W) on-board SoC with VGA/HDMI/LVDS, Dual PCIe GbE, PCIe Mini, USB 3.2 Gen 1 (5Gb/s), SATA 3Gb/s, mSATA, COM, iRIS-1010, Audio and RoHS
NANO-BT-i1-N28071-R11	EPIC SBC supports Intel® 22nm dual-core N2807 1.58GHz (4.3W) on-board SoC with VGA/HDMI/LVDS, Dual PCIe GbE, PCIe Mini, USB 3.2 Gen 1 (5Gb/s), SATA 3Gb/s, mSATA, COM, iRIS-1010, Audio and RoHS
NANO-BT-i1-E38XX1-R11**	EPIC SBC supports Intel® Atom™ E38XX on-board SoC with VGA/HDMI/LVDS, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA 3Gb/s, mSATA, COM, iRIS-1010, Audio and RoHS
NANO-BT-J19001-ECO-R10	Intel® 22nm Quad-Core J1900 2.0GHz (10W) on-board SoC with VGA/HDMI/LVDS, Dual PCIe GbE, PCIe Mini, USB 3.2 Gen 1 (5Gb/s), SATA, mSATA, COM, Audio, ECO packing and RoHS (10 pcs/pack)
iRIS-1010-R10	IPMI 2.0 adapter card with AST1010 BMC chip (w/o KVM over IP function) for PCIe Mini socket interface
32001-008600-200-RS	Dual-port USB 2.0 cable, 210mm, P=2.0
32006-000300-100-RS	PS/2 KB/MS Y-cable without bracket, 140mm/120mm
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0

**By order production, MOQ: 100

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)