



# PCIE-Q670-R20

Full-size PICMG 1.3 CPU Card supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® Q67, DDR3, VGA/DVI-D, Dual Intel® PCIe GbE, SATA 6Gb/s, PCIe Mini, HD Audio and RoHS

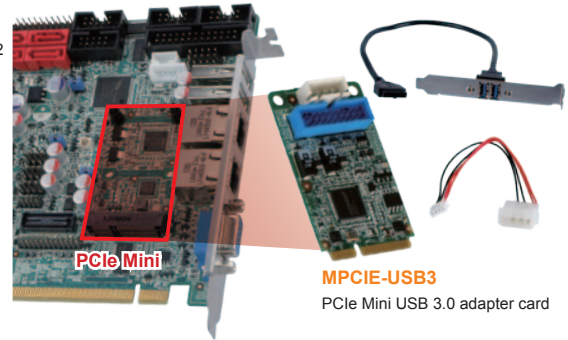

The PCIe Mini interface provides PCIe x1 and USB 1.1/2.0 signal for full-size or half-size devices such as PCIe Mini USB 3.0 adapter card (MPCIE-USB3) or wireless LAN cards.

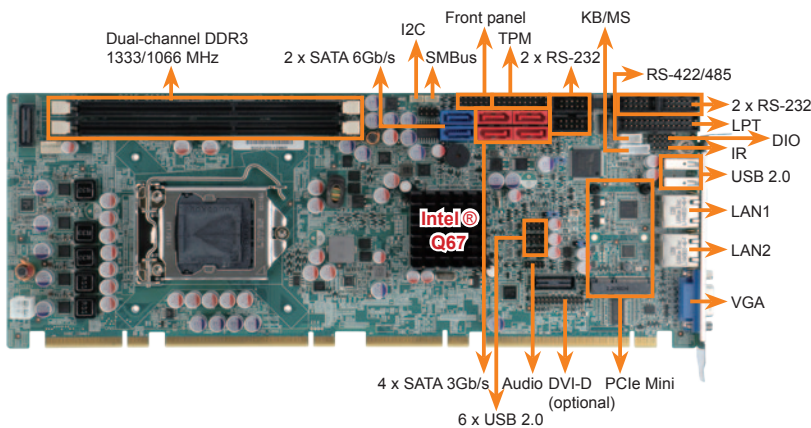

IO-KIT-001  
DVI cable included in DVI model

## Specifications

- ◆ CPU  
LGA1155 socket supports Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor
- ◆ PCH  
Intel® Q67
- ◆ Memory  
Two 240-pin 1066/1333MHz dual-channel unbuffered DDR3 SDRAM DIMMs supported (system max. 16GB)
- ◆ BIOS  
UEFI BIOS
- ◆ Graphics Engine  
Intel® HD Graphics Gen 6 supports DX10.1 and OpenGL 3.0  
Full MPEG2, VC1, AVC Decode
- ◆ Display Output  
1 x VGA  
1 x DVI-D (via header to IO-KIT-001-R20 DVI-D/USB module) (optional)
- ◆ Ethernet  
LAN1: Intel® 82583V PCIe controller  
LAN2: Intel® 82579 PHY with Intel® AMT 7.0 support
- ◆ Super I/O  
Fintek F81866
- ◆ I/O Interface  
4 x RS-232 1 x RS-422/485  
1 x LPT 1 x 6-pin wafer for KB/MS  
8 x USB 2.0 (2 by rear IO, 6 by on-board pin header)  
4 x SATA 3Gb/s (RAID 0/1/5/10 supported)  
2 x SATA 6Gb/s (RAID 0/1/5/10 supported)
- ◆ Front Panel  
1 x Front panel connector (power LED, HDD LED, speaker, power button, reset button)
- ◆ Audio  
Supported by IEI AC-KIT-892HD-R10 audio kit
- ◆ TPM  
1 x TPM connector (2x10 pin)
- ◆ SMBus  
1 x 4-pin wafer
- ◆ Infrared Interface  
1 x 5-pin header
- ◆ Expansions  
PCIe signal and PCI signal via golden finger  
1 x PCIe Mini slot (with USB 1.1/2.0 signal)
- ◆ Watchdog Timer  
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O  
8-bit digital I/O (4-bit input, 4-bit output)
- ◆ Fan Connector  
1 x 4-pin smart Fan Connector
- ◆ Power Supply  
AT/ATX power supply supported
- ◆ Power Consumption  
5V@3.45A, 12V@0.32A, Vcore\_12V@5.24A, 3.3V@1.69A, 5VSB@0.17A (3.4GHz Intel® Core™ i7-2600K with two 2GB 1333MHz DDR3 memory)
- ◆ Operating Temperature  
-10°C ~ 60°C
- ◆ Storage Temperature  
-20°C ~ 70°C
- ◆ Operating Humidity  
5% ~95%, non-condensing
- ◆ Dimensions  
338 mm x 126 mm
- ◆ Weight  
GW: 1200g/NW: 420g

## Features

1. PICMG 1.3 full-size graphics grade solution
2. LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processors supported
3. Up to 16 GB 1333 MHz dual-channel DDR3 SDRAM
4. Supports dual independent display by VGA and DVI-D (DVI model)
5. Supports PCIe Mini expansion
6. Intel® PCIe GbE with Intel® AMT 7.0 support
7. Supports SATA 6Gb/s
8. Supports RAID function via SATA 6Gb/s and SATA 3Gb/s
9. TPM V1.2 hardware security provided by the TPM module
10. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Packing List

1 x PCIE-Q670 Single Board Computer	
1 x Dual RS-232 Cable (P/N: 19800-000051-RS)	
4 x SATA Cable (P/N: 32000-062800-RS)	1 x Mini jumper pack
1 x USB Cable (P/N: 19800-003100-300-RS)	1 x Utility CD
1 x One Key Recovery CD	1 x QIG (Quick Installation Guide)

## Ordering Information

Part No.	Description
PCIE-Q670-R20	Full-size PICMG 1.3 CPU card supports LGA1155 32nm Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® Q67, DDR3, VGA, dual Intel® PCIe GbE, SATA 6Gb/s, PCIe Mini, HD Audio and RoHS
PCIE-Q670-DVI-R20	Full-size PICMG 1.3 CPU card supports LGA1155 32nm Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® Q67, DDR3, DVI-D, dual Intel® PCIe GbE, SATA 6Gb/s, PCIe Mini, HD Audio and RoHS
32205-003800-300-RS	RS-422/485 cable, 200mm
19800-000075-RS	KB/MS cable with bracket
SAIDE-KIT01-R10	SATA to IDE/CF converter board
32102-000100-200-RS	SATA power cable
19800-000049-RS	LPT cable
AC-KIT-892HD-R10	7.1 channel HD audio kit with Realtek ALC892 supports dual audio streams
CPU-DT-i5-2500T	Intel® Core™ i5-2500T processor, LGA1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-1156C-RS CPU cooler
CPU-DT-i5-2390T	Intel® Core™ i5-2390T processor, LGA1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-1156C-RS CPU cooler
CPU-DT-i3-2120T	Intel® Core™ i3-2120T processor, LGA1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-1156C-RS CPU cooler
CPU-DT-P-G630T	Intel® Pentium® G630T processor, LGA1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-1156C-RS CPU cooler
CPU-DT-C-G440	Intel® Celeron® G440 processor, LGA1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-1156C-RS CPU cooler
CF-1156A-RS-R11	High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156C-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
CF-1156E-R11	High-performance LGA1155/LGA1156 cooler kit, 95W

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [IEI](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)  
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)  
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)  
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)  
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)  
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q\\_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)  
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)  
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)  
[OLINUXINO-MICRO-E8GS16M-IND](#)