


# PM-BT

PC/104-Plus SBC with Intel® Atom™/Celeron® on-board SoC with DDR3L, VGA, LVDS, GbE, USB 2.0, SATA 3Gb/s, RS-232/422/485 and 5V DC input, RoHS

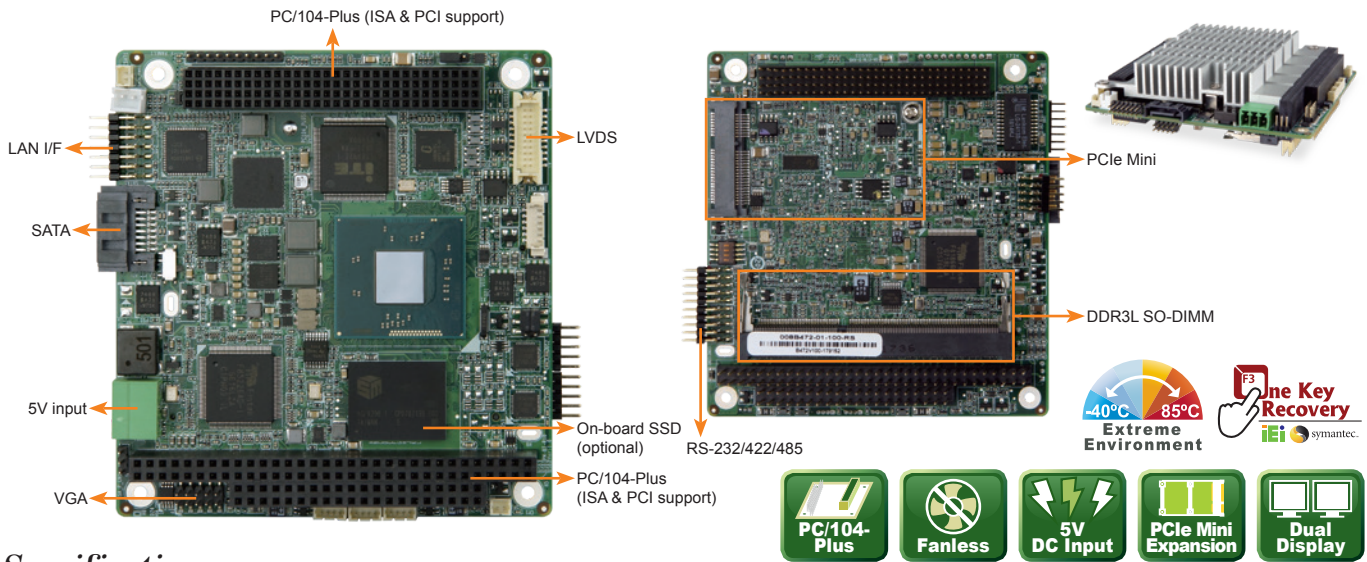


## Specifications

- ◆ SoC
  - Intel® Atom™ E3845 on-board SoC (1.91GHz, quad-core, 2MB cache, TDP=10W)
  - Intel® Atom™ E3825 on-board SoC (1.33GHz, dual-core, 1MB cache, TDP=6W)
  - Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W)
  - Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
- ◆ BIOS
  - AMI UEFI BIOS
- ◆ Memory
  - One 204-pin 1333/1066 MHz single-channel DDR3L SO-DIMM supports up to 8 GB (J1900, N2930, E3845, E3827, E3826, E3825, E3815) or 4 GB (N2807)
- ◆ Graphics Engine
  - Intel® HD Graphics Gen 7 Engine with four execution units, supporting DX11.1, OpenGL 4.2 and OpenCL 1.2
- ◆ Display Output
  - Dual independent display
  - 1 x VGA (up to 2560x1600@60 Hz)
  - 1 x 18/24-bit single-channel LVDS (2x10 pin)
- ◆ Ethernet
  - 1 x Intel® I210
- ◆ Super I/O
  - Fintek F81866
- ◆ Internal I/O Interface
  - 1 x SATA 3Gb/s with 5V SATA power connector
  - 3 x USB 2.0 (1x4 pin, P=1.25)
  - 2 x RS-232/422/485 (2x5, P=2.0)
- ◆ Storage
  - On-board SSD (optional, support by request)
- ◆ Front Panel
  - 1 x 10-pin header, P=2.0 (power LED, HDD LED, power button and reset button)
- ◆ Expansion
  - 1 x Full-size PCIe Mini slot (supports mSATA)
  - 1 x PC/104-Plus (ISA+PCI)\*
- ◆ Digital I/O
  - 1 x 8-bit digital I/O (2x5 pin, P=2.0)
- ◆ Power Supply
  - 5V DC input
  - 12V for fan, LVDS and PCI-104 plus
  - » 5V for PCI-104 plus (1x3 pin, P=2.0)
  - » 12V for PCI-104 plus (1x3 pin, P=2.0)
  - 3/5V jumper for PCI-104 plus
  - Support AT/ATX mode
  - ErP/EuP Compliant
- ◆ Power Consumption
  - 5V@1.70A (Intel® Celeron® J1900 CPU with 8GB memory)
- ◆ Watchdog Timer
  - Software programmable, supports 1~255 sec. system reset
- ◆ Operating Temperature
  - 20°C ~ 60°C (for J1900/N2930/N2807)
  - 40°C ~ 85°C (for E38xx)
- ◆ Storage Temperature
  - 40°C ~ 85°C
- ◆ Thermal
  - Heatsink
- ◆ Operating Humidity
  - 5% ~ 95%, non-condensing
- ◆ Dimensions
  - 96 mm x 90 mm
- ◆ Weight
  - GW: 500g / NW 120g
- ◆ CE/FCC compliant

## Features

- PC/104 form factor SBC supports 22nm Intel® Atom™ on-board SoC
- PC/104-Plus (ISA and PCI signal) function support
- 5V DC input solution
- Support 2 COM, PCIe Mini, USB and optional on-board SSD
- Dual display from VGA and LVDS
- Wide range temperature support from -40°C ~ 85°C (for E38xx series CPU)
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Dimensions (Unit: mm)

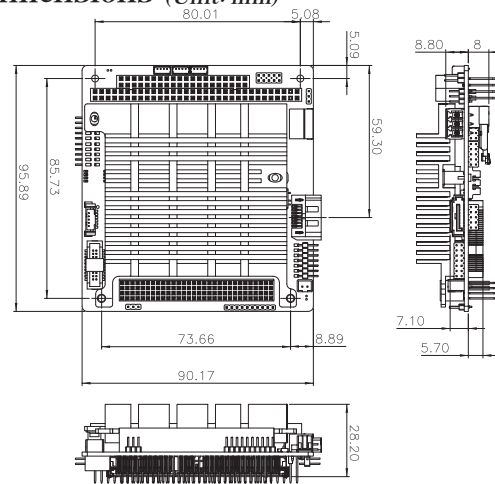

## Packing List

1 x PM-BT single board computer	
1 x COM port cable	1 x SATA cable kit
1 x Heatsink	1 x Single-port USB cable
1 x LAN cable	1 x VGA cable

## Ordering Information

Part No.	Description
PM-BT-J19001-R10	PC/104-Plus single board computer with Intel® Celeron® J1900 SoC with DDR3L, VGA, LVDS, USB 2.0, SATA 3Gb/s, GbE, RS-232/422/485 and 5V DC input, RoHS
PM-BT-N28071-R10	PC/104-Plus single board computer with Intel® Celeron® N2807 SoC with DDR3L, VGA, LVDS, USB 2.0, SATA 3Gb/s, GbE, RS-232/422/485 and 5V DC input, RoHS
PM-BT-E38xx1W2-R10**	PC/104-Plus single board computer with Intel® Atom™ E38xx SoC with DDR3L, VGA, LVDS, USB 2.0, SATA 3Gb/s, GbE, RS-232/422/485 and 5V DC input, RoHS, -40°C ~ 85°C
33403-000015-RS	PC104 plus spacer (for PCI) 120 pin socket connector
33403-000016-RS	PC104 plus spacer (for ISA) 64+40 pin socket connector

\*\* Note: Models with other CPUs not listed in the table are requested by MOQ - 100 pcs/lot.  
 \* ISA limitation, Please refer to the user manual for more information.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [IEI](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)  
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [BPI-M5](#)  
[GENE-APL5-A12-F002](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#)  
[VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#)  
[BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-](#)  
[APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q\\_i](#) [M2M \(TELIT\)](#) [RELAY](#)  
[PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-](#)  
[LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#)