

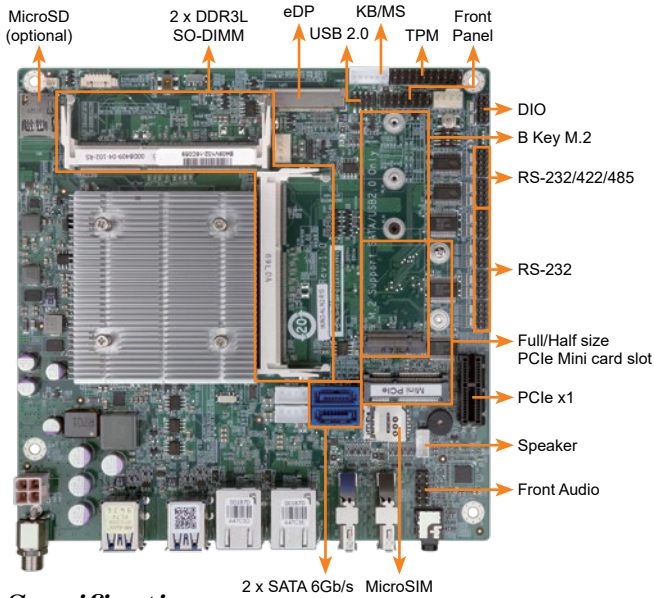


tKINO-AL

Thin Mini-ITX SBC supports Intel® 14nm Atom™, Pentium® or Celeron® on-board SoC with DP++, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, M.2, SATA 6Gb/s, COM, Audio and RoHS

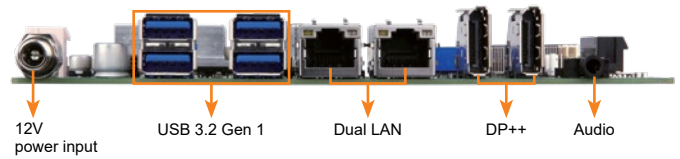

Flexible Selection of Modules with Different Functions

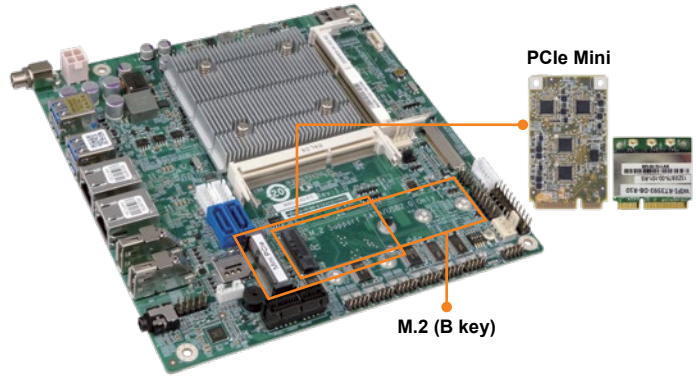

Specifications

- ◆ SoC
 - Intel® Pentium® N4200 on-board SoC (up to 2.5GHz, quad-core, 2M Cache, TDP=6W)
 - Intel® Celeron® N3350 on-board SoC (up to 2.4GHz, dual-core, 2M Cache, TDP=6W)
- ◆ BIOS
 - UEFI BIOS
- ◆ Memory
 - Two 204-pin 1867/1600MHz Dual-channel DDR3L DIMMs support up to 8GB
- ◆ Graphics Engine
 - Intel® HD Graphics Gen9 Low Power; 18 Execution Units
 - 4K Codec Decode & Encode for HEVC, H.264, VP8, SVC, MVC
- ◆ Display Output
 - Triple Independent Display
 - 1 x eDP (up to 3840x2160@60Hz)
 - 2 x DP++ (up to 4096x2160@60Hz)
- ◆ Ethernet
 - 2 x PCIe GbE LAN Realtek RTL8111
- ◆ External I/O Interface
 - 4 x USB 3.2 Gen 1 (5Gb/s)
- ◆ Internal I/O Interface
 - 1 x KB/MS (1x6 pin)
 - 2 x RS-232/422/485 (2x5 pin, P=2.0)
 - 1 x MicroSD card slot (optional)
 - 4 x RS-232 (2x5 pin, P=2.0)
 - 2 x USB 2.0 (2x4 pin, P=2.0)
 - 2 x SATA 6Gb/s with 12V/5V SATA power connector (No RAID)
- ◆ SMBus
 - 1 x SMBus (1x4 pin)
- ◆ TPM
 - 1 x TPM (2x10 pin)
- ◆ Audio
 - Realtek ALC269 HD codec
 - 1 x Audio jacks (line-out, mic-in) on rear IO
 - 1 x Front audio (2x5 pin)
 - 1 x Speaker (1x4 pin)
- ◆ Front Panel
 - 1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED: 2 x LAN LED (1x2 pin)
- ◆ Expansion
 - 1 x PCIe x1 slot
 - 1 x Full/Half-size PCIe Mini card slot (w/ SIM holder)
 - 1 x M.2 B key (2242/2260/2280, USB 2.0 & colay SATA2)
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ FAN Connector
 - 1 x CPU smart fan (1x4 pin)
 - 1 x System smart fan (1x4 pin)
- ◆ Power supply
 - 12V only DC input as Default
 - 1 x Internal power connector (2x2 pin)
 - 1 x External DC power Jackc (Ø5.5mm)
 - Support AT/ATX mode
- ◆ Watchdog Timer: Software programmable, supports 1~255 sec. system reset
- ◆ Power Consumption
 - 12V@2.58A (Intel® Pentium® N4200 CPU with two 8GB 1600MHz DDR3L memory)
- ◆ Operating Temperature: -20°C ~ 70°C
- ◆ Storage Temperature: -40°C ~ 85°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 170mm x 170mm
- ◆ Weight: GW: 1100g / NW: 700g
- ◆ CE/FCC compliant



Features

- Thin Mini-ITX SBC supports Intel® 14nm Atom™, Pentium® or Celeron® on-board SoC supports dual-channel DDR3L SO-DIMMs
- Triple independent display support
- Full size PCIe Mini slot with SIM sockets for WWAN expansion
- COM, USB 3.2 Gen 1 (5Gb/s), SATA 6Gb/s and audio support

Packing List

- | |
|--|
| 1 x tKINO-AL single board computer with heatsink |
| 1 x SATA with power cable kit |
| 1 x I/O Shielding |
| 1 x QIG |

Ordering Information

Part No.	Description
tKINO-AL-N2-R10	Thin Mini-ITX SBC supports Intel® 14nm quad-core Pentium® N4200 2.5GHz on-board SoC with DP++, Dual PCIe GbE, M.2, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA 6Gb/s, COM, Audio and RoHS
tKINO-AL-N1-R10	Thin Mini-ITX SBC supports Intel® 14nm dual-core Celeron® N3350 2.4GHz on-board SoC with DP++, Dual PCIe GbE, M.2, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA 6Gb/s, COM, Audio and RoHS
32000-070301-RS	Dual-port USB cable, 210mm, P=2.0
32006-001100-201-RS	PS/2 KB/MS cable, 135mm, P=2.0
32205-002700-100-RS	RS-232 cable, 200mm, P=2.0
TPM-IN02-R20	20-pin Infineon TPM 2.0 module, software management tool, firmware v5.5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)
[S16M-IND](#)