



WAFER-BT-i1



3.5" SBC with Intel® 22nm Atom™/Celeron® on-board SoC, VGA/LVDS/iDP, Dual PCIe GbE, USB 3.0, PCIe Mini, SATA 3Gb/s, mSATA, COM, Audio and RoHS

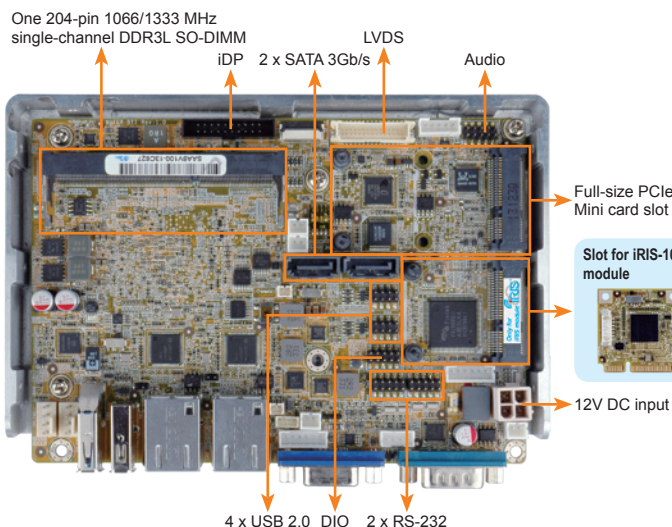

Intel® Atom™ Bay Trail SoC processor on solder side



1 x Full-size PCIe Mini slot for Wi-Fi expansion
2 x SATA connector for storage




Dual independent display (max. support 1920x1200@60Hz)



Specifications

- ◆ SoC
 - Intel® Atom™ E3845 on-board SoC (1.91GHz, quad-core, 2MB cache, TDP=10W)
 - Intel® Atom™ E3827 on-board SoC (1.75GHz, dual-core, 1MB cache, TDP=8W)
 - Intel® Atom™ E3826 on-board SoC (1.46GHz, dual-core, 1MB cache, TDP=7W)
 - Intel® Atom™ E3825 on-board SoC (1.33GHz, dual-core, 1MB cache, TDP=6W)
 - Intel® Atom™ E3815 on-board SoC (1.46GHz, single-core, 512KB cache, TDP=5W)
 - Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W)
 - Intel® Celeron® N2930 on-board SoC (1.83GHz, quad-core, 2MB cache, TDP=7.5W)
 - Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
- ◆ BIOS
 - AMI UEFI BIOS
- ◆ Memory
 - One 204-pin 1066/1333 MHz single-channel DDR3L SO-DIMM slot supports up to 8 GB (J1900, N2930, E3845, E3827, E3826, E3825, E3815) or 4 GB (N2807)
- ◆ Graphics Engine
 - Intel® HD Graphics Gen 7 Engine with 4 execution units, supports DX11.1, OpenGL 4.2 and OpenCL 1.2
- ◆ Display Output
 - Dual independent display
 - 1 x VGA (up to 2560x1600@60Hz)
 - 1 x 24-bit dual-channel LVDS connector (up to 1920x1200@60Hz)
 - 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 2560x1600@60Hz)
- ◆ Ethernet
 - LAN1: Intel® I210-AT PCIe controller with NCSI support
 - LAN2: Intel® I211-AT PCIe controller
- ◆ External I/O Interface
 - 1 x RS-232
 - 1 x USB 2.0
 - 1 x USB 3.0
- ◆ Internal I/O Interface
 - 1 x KB/MS (1x6 pin)
 - 1 x RS-422/485 (1x4 pin, P=2.0)
 - 2 x RS-232 (2x5 pin, P=2.0)
 - 2 x SATA 3Gb/s with 5V SATA power connector
 - 4 x USB 2.0 (2x4 pin, P=2.0)
- ◆ SMBus: 1 x SMBus (1x4 pin)
- ◆ Audio
 - Realtek ALC662 HD codec
 - 1 x Front audio (2x5 pin)
- ◆ Front Panel
 - 1 x Power LED & HDD LED (1x6 pin)
 - 1 x Power button (1x2 pin)
 - 1 x Reset button (1x2 pin)
- ◆ LAN LED: 2 x LAN LED (1x2 pin)
- ◆ Expansion: 1 x Full-size PCIe Mini card slot (supports mSATA, colay with SATA port 2)
- ◆ iRIS Remote Management Module: 1 x iRIS-1010 slot
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
 - 1 x CPU smart fan (1x4 pin)
 - 1 x System smart fan (1x4 pin)
- ◆ Power Supply
 - 12V only DC input
 - 1 x Internal power connector (2x2 pin)
 - Support AT/ATX mode
- ◆ Watchdog Timer: Software programmable, supports 1~255 sec. system reset
- ◆ Power Consumption
 - 12V@1.45A (Intel® Celeron® J1900 with one 8 GB 1333 MHz DDR3 memory)
- ◆ Operating Temperature: -20°C ~ 60°C
- ◆ Storage Temperature: -30°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 146mm x 102mm
- ◆ Weight: GW: 600g / NW: 250g
- ◆ CE/FCC compliant

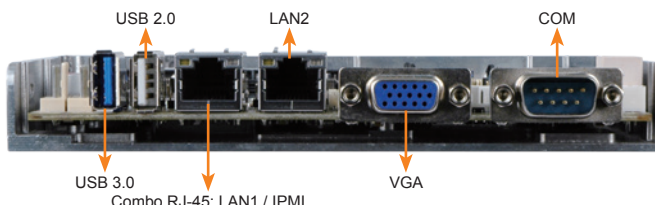

Features

- 3.5" SBC supports Intel® 22nm Atom™ on-board SoC
- Dual independent display support
- 1333/1066 MHz 1.35V DDR3L SDRAM up to 8 GB
- COM, USB 3.0, SATA 3Gb/s, PCIe Mini, mSATA and Audio support
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery



Packing List

1 x WAFER-BT-i1 single board computer	
1 x Audio cable	1 x SATA with power cable kit
1 x Power cable	1 x QIG

Ordering Information

Part No.	Description
WAFER-BT-i1-J19001-R10	3.5" SBC supports Intel® 22nm quad-core Celeron® J1900 2.0GHz on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio, iRIS-1010 and RoHS
WAFER-BT-i1-N28071-R10	3.5" SBC supports Intel® 22nm dual-core Celeron® N2807 1.58GHz (4.3W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio, iRIS-1010 and RoHS
WAFER-BT-i1-N29301-R10	3.5" SBC supports Intel® 22nm quad-core Celeron® N2930 1.86GHz (7.5W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio, iRIS-1010 and RoHS
WAFER-BT-i1-E38XX1-R10**	3.5" SBC supports Intel® 22nm Atom™ E38XX on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio, iRIS-1010 and RoHS
WAFER-BT-J19001-ECO-R10	Intel® 22nm Quad-Core Celeron® J1900 2.0GHz on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA, mSATA, COM, Audio, ECO packing and RoHS
19800-000300-100-RS	RS-232 cable, 300mm, P=2.0
32000-023800-RS	PS/2 KB/MS cable, 135mm/110mm, P=2.0
32001-008600-200-RS	Dual-port USB cable, 210mm, P=2.0
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0

**By order production, MOQ: 100

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#)
[ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-](#)
[IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#)
[IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#)
[A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-](#)
[S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-OLINUXINO-MICRO-E8GS16M-IND](#) [T2-OLINUXINO-MICRO-](#)
[S16M-IND](#)