


# WAFAER-LX-R12

3.5" SBC with on-board AMD Geode™ LX 800 processor VGA/LVDS/TTL, Dual LAN and SATA

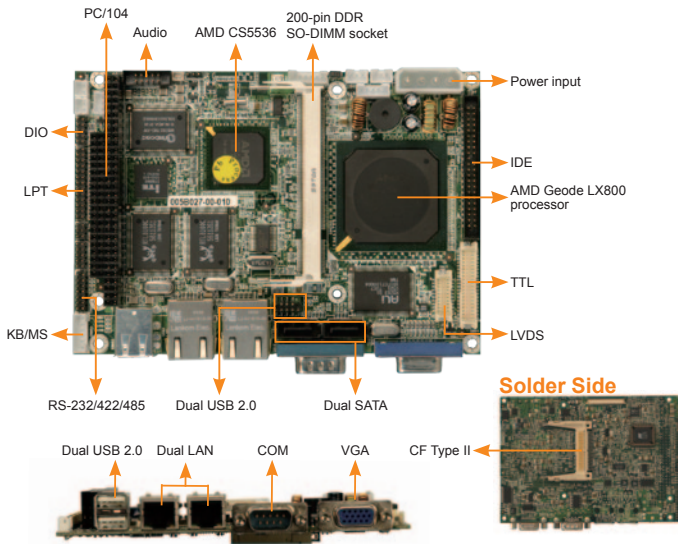

## Features

- 3.5" form factor embedded board with AMD Geode™ LX 800 processor and RoHS compliant
- DDR 333/400MHz SO-DIMM SDRAM up to 1GB
- Complete I/O support with two SATA, IDE, CF Type II, PC/104, dual LAN and four USB 2.0
- 24-bit TTL/18-bit single-channel LVDS
- Value embedded applications with low power and fanless design. Support Windows® XP/CE/XPe
- The best choice for thin client Windows® CE 5.0, XPe OS image with ICA, RDP and IE APs ready
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Specifications

- CPU**  
On board AMD Geode™ LX800 (500MHz) processor
- System Chipsets**  
AMD Geode LX800 + AMD CS5536
- BIOS**  
Award BIOS
- System Memory**  
One 200-pin 400/333MHz DDR SDRAM SO-DIMM Supported (system max. 1GB)
- Ethernet**  
Dual LAN: 10/100Mbps RTL8100C Ethernet Controller
- I/O Interface**  
4 x USB 2.0  
2 x SATA with VIA VT6421A RAID 0, 1 function support  
1 x LPT  
1 x CF Type II  
2 x RS-232  
1 x RS-422/485  
1 x PS/2 for KB/MS  
1 x IDE
- Expansion**  
1 x PC/104
- Digital I/O**  
8-bit digital I/O, 4-bit input/4-bit output by super I/O
- Super I/O**  
Winbond W83627EHG
- Audio**  
Realtek ALC203 with AC'97 Codec
- Display**  
VGA integrated in AMD Geode™ LX 800  
24-bit TTL  
18-bit single-channel LVDS
- Infrared Interface**  
1 x Infrared interface by pin header
- Watchdog Timer**  
Software programmable supports 1~255 sec. system reset
- Power Supply**  
5V only, AT/ATX power support
- Power Consumption**  
5V@1.53A (AMD LX800 with DDR 400MHz/1GB)
- Operating Temperature**  
0°C ~ 60°C
- Storage Temperature**  
-10°C ~ 70°C
- Operating Humidity**  
5% ~ 95%, non-condensing
- Dimensions**  
146 mm x 102 mm
- Weight**  
GW: 670 g/NW: 230 g

## Packing List


1 x WAFAER-LX800 single board computer	
1 x IDE flat cable 44p/44p (P/N: 32200-000009-RS)	
1 x RS-232/422/485 cable (P/N: 32200-026500-RS)	
1 x SATA power cable (P/N: 32102-000100-200-RS)	
1 x Audio cable (P/N: 32000-072100-RS)	1 x One Key Recovery CD
1 x KB/MS Y cable (P/N: 32000-023800-RS)	1 x Mini jumper pack
2 x SATA cable (P/N: 32000-062800-RS)	1 x Utility CD
1 x USB cable (P/N: 32000-070301-RS)	1 x QIG

## Ordering Information

Part No.	Description
WAFAER-LX-800-R12	3.5" SBC with AMD Geode™ LX 800 processor, audio, VGA/LVDS/TTL, dual LAN and SATA connectors
32200-015100-RS	LPT cable

# WAFAER-LX2-R12

3.5" SBC with AMD Geode™ LX 800 processor, 8 COM, DDR 400MHz, VGA/LVDS/TTL display interfaces, PC/104, four USB 2.0, Embedded OS support

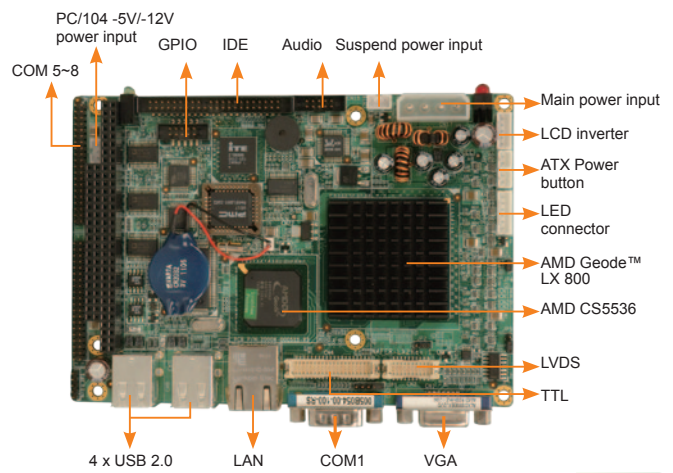

## Features

- 3.5" form factor with AMD Geode™ LX 800 CPU
- One 333/400MHz DDR SO-DIMM socket supports up to 1GB memory
- VGA, 24-bit TTL, 18-bit LVDS display interfaces
- Seven RS-232 and one RS-232/422/485
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Specifications

- CPU**  
On-board AMD Geode™ LX 800 (500MHz) processor
- System Chipsets**  
AMD Geode™ LX 800 + CS5536
- BIOS**  
Award BIOS
- System Memory**  
One 200-pin 400/333MHz DDR SDRAM SO-DIMM supported (system max. 1GB)
- Ethernet**  
LAN: 10/100Mbps RTL8100C Ethernet Controller
- I/O Interface**  
7 x RS-232  
4 x USB 2.0  
1 x RS-232/422/485  
1 x IDE
- Expansion**  
PC/104 (ISA Bus)
- Digital I/O**  
8-bit digital I/O, 4-bit input/4-bit output
- Display Interface**  
VGA integrated in AMD Geode™ LX 800  
24-bit TTL  
18-bit single-channel LVDS
- Audio**  
Realtek ALC203 with AC'97 codec
- SSD**  
CF Type II
- Watchdog Timer**  
Software programmable supports 1 ~255 sec. system reset
- Power Supply**  
5V only, AT/ATX support
- Power Consumption**  
5V@1.33A (AMD Geode™ LX 800 with 400MHz 1GB DDR)
- Operating Temperature**  
0°C ~ 60°C (32°F ~ 140°F)
- Storage Temperature**  
-10°C ~ 70°C
- Operating Humidity**  
5% ~ 95%, non-condensing
- Dimensions:** 146 mm x 102 mm
- Weight:** GW: 670g/NW: 230g

## Packing List

1 x WAFAER-LX2 single board computer		
1 x IDE flat cable 44p/44p (P/N: 32200-000009-RS)		
2 x Quad RS-232 adapter cable (P/N: 32200-025401-RS)		
1 x Audio cable (P/N: 32200-072100-RS)	1 x One Key Recovery CD	
1 x Mini jumper pack	1 x Utility CD	1 x QIG

## Ordering Information

Part No.	Description
WAFAER-LX2-800-R12	3.5" SBC with AMD Geode™ LX 800 processor, Audio, VGA/LVDS, TTL/LVDS, four USB 2.0, seven RS-232 and one RS-232/422/485

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [IEI](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)  
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)  
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#)  
[ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-](#)  
[IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#)  
[IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q\\_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#)  
[A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-](#)  
[S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-OLINUXINO-MICRO-E8GS16M-IND](#) [T2-OLINUXINO-MICRO-](#)  
[S16M-IND](#)