







Materials for general purpose

Materials for general purpose





This group includes iglidur® materials that can be used almost universally under normal conditions (temperature, media, etc.). iglidur® G is the decathlete among iglidur® materials. It performs exceedingly well in almost all technical disciplines. With reduced moisture absorption and improved wear and temperature behaviour for many applications, iglidur® G1 represents an advanced development of this classic. The iglidur® GLW is specially suitable for solutions in large batches. iglidur® P and iglidur® K have a similar potential as iglidur® G paired with significantly reduced moisture absorption, which is advantageous for use in wet environments.


 Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

 Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)

	<b>igidur® G</b> The classic all-rounder	Temperature [°C] <sup>123)</sup>	+130	-	<div style="width: 25%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	80	-	<div style="width: 33%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.22	-	<div style="width: 22%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	1.75	-	<div style="width: 17.5%;"></div>	+
		Price index	-	-	<div style="width: 10%;"></div>	+
	<b>igidur® G1</b> More universal	Temperature [°C] <sup>123)</sup>	+180	-	<div style="width: 33%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	91	-	<div style="width: 40.5%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.11	-	<div style="width: 11%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	0.76	-	<div style="width: 7.6%;"></div>	+
	<b>igidur® M250</b> The robust all-rounder according to ISO 2795	Temperature [°C] <sup>123)</sup>	+80	-	<div style="width: 16.7%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	20	-	<div style="width: 4%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.56	-	<div style="width: 56%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	2.10	-	<div style="width: 21%;"></div>	+
	<b>igidur® P210</b> Specialist for pivoting, rolling applications and more	Temperature [°C] <sup>123)</sup>	+100	-	<div style="width: 20%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	50	-	<div style="width: 10%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.17	-	<div style="width: 17%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	0.38	-	<div style="width: 3.8%;"></div>	+
		Price index	-	-	<div style="width: 10%;"></div>	+

<sup>123)</sup> Upper long-term application temperature <sup>124)</sup> Max. recommended surface pressure at +20°C <sup>125)</sup> Best pairing for p = 1 MPa, v = 0.3m/s, rotating

	<b>igidur® P230</b> The low-cost all-rounder	Temperature [°C] <sup>123)</sup>	+110	-	<div style="width: 22%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	60	-	<div style="width: 12%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.13	-	<div style="width: 13%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	1.53	-	<div style="width: 15.3%;"></div>	+
		Price index	-	-	<div style="width: 10%;"></div>	+
	<b>igidur® P</b> The cost-effective outdoor all-rounder	Temperature [°C] <sup>123)</sup>	+130	-	<div style="width: 26%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	50	-	<div style="width: 10%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.24	-	<div style="width: 24%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	1.80	-	<div style="width: 18%;"></div>	+
		Price index	-	-	<div style="width: 10%;"></div>	+
	<b>igidur® K</b> Versatile and cost-effective	Temperature [°C] <sup>123)</sup>	+170	-	<div style="width: 34%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	50	-	<div style="width: 10%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.16	-	<div style="width: 16%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	0.60	-	<div style="width: 6%;"></div>	+
		Price index	-	-	<div style="width: 10%;"></div>	+
	<b>igidur® GLW</b> Low-cost material for high-volume production	Temperature [°C] <sup>123)</sup>	+100	-	<div style="width: 20%;"></div>	+
		Surface pressure [MPa] <sup>124)</sup>	80	-	<div style="width: 16%;"></div>	+
		Coefficient of friction [μ] <sup>125)</sup>	0.23	-	<div style="width: 23%;"></div>	+
		Wear [μm/km] <sup>125)</sup>	8.30	-	<div style="width: 83%;"></div>	+
				Price index	-	-

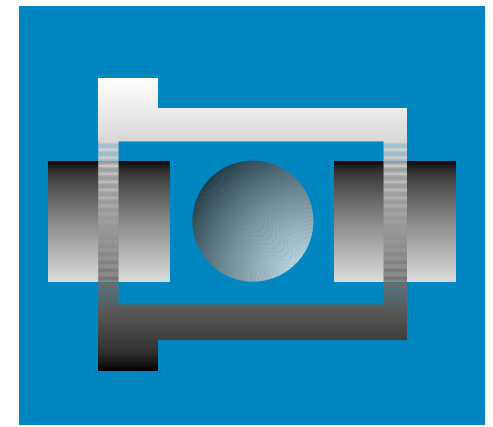

## The classic all-rounder

Excellent price-performance ratio

### iglidur® G



#### When to use it?

- When an economical all-round performance bearing is required
- For low to medium speeds
- When the bearing needs to run on different shaft materials
- For pivoting and rotational movements



#### When not to use it?

- When mechanical reaming of the bore is necessary  
*iglidur® M250*
- When lowest wear is required  
*iglidur® W300*
- When universal chemical resistance is required  
*iglidur® X*
- When temperatures are constantly higher than +130°C  
*iglidur® H, iglidur® X, iglidur® H370*
- For underwater applications  
*iglidur® H370*

# Bearing technology | Plain bearings | iglidur® G



Ø  
1.5-195.0mm



Also available as:



Bar stock, round bar  
Page 743



Bar stock, plate  
Page 773



tribo-tape liner  
Page 781



Guide rings  
Page 641



Two hole flange bearings  
Page 667



Moulded special parts  
Page 696



igubal® spherical balls  
Page 993

## The classic all-rounder Excellent price-performance ratio

iglidur® G plain bearings cover an extremely wide range of different requirements - they are truly "all-round". Therefore, the material is rightly called universal. Typical applications include medium to high loads, medium surface speeds and medium temperatures.

- Over 650 sizes available from stock
- High wear resistance
- Resistant to dirt
- Cost-effective
- Lubrication-free
- Maintenance-free
- Resistant to dirt

### Typical application areas

- Agricultural machines
- Construction machinery industry
- Sports and leisure
- Automotive industry
- Mechatronics
- Machine building

### Descriptive technical specifications

Wear resistance at +23°C	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Wear resistance at +90°C	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Wear resistance at +150°C	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Slide property	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Wear resistance under water	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Media resistance	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Resistant to edge pressures	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Resistant to shock and impact loads	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+
Dirt resistance	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>	+

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)

EN 09/2023



## Technical data

General properties		Testing method	
Density	g/cm <sup>3</sup>	1.46	
Colour		matt grey	
Max. moisture absorption at +23°C/50% r.h.	% weight	0.7	DIN 53495
Max. moisture absorption	% weight	4.0	
Coefficient of friction, dynamic, against steel	μ	0.08-0.15	
pv value, max. (dry)	MPa · m/s	0.42	
Mechanical properties			
Flexural modulus	MPa	7,800	DIN 53457
Flexural strength at +20°C	MPa	210	DIN 53452
Compressive strength	MPa	78	
Max. permissible surface pressure (+20°C)	MPa	80	
Shore D hardness		81	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+130	
Max. application temperature short-term	°C	+220	
Min. application temperature	°C	-40	
Thermal conductivity	W/m · K	0.24	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	9	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	> 10 <sup>13</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>11</sup>	DIN 53482

Table 01: Material properties

iglidur® G is the decathlete among iglidur® materials. It performs exceedingly well in all technical disciplines and is the classic all-rounder, primarily with respect to the overall general, mechanical, thermal and tribological specifications.

### Moisture absorption

The moisture absorption of iglidur® G plain bearings in ambient conditions is approximately 0.7 % weight. The saturation limit submerged in water is 4.0% weight. This must be taken into account for these types of applications.

### Vacuum

In vacuum, any present moisture is released as vapour. Use in vacuum is only possible with dehumidified iglidur® G1 bearings.

### Radiation resistance

Plain bearings made from iglidur® G are resistant up to a radiation intensity of 3 · 10<sup>2</sup> Gy.

### Resistance to weathering

iglidur® G plain bearings are resistant to weathering. The material properties are slightly affected. Discolouration occurs.

### Mechanical properties

With increasing temperatures, the compressive strength of iglidur® G plain bearings decreases. Diagram 02 shows this inverse relationship. With the long-term permitted application temperature of +130°C, the permitted surface pressure still amounts to 35MPa. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this. Diagram 03 shows the elastic deformation of iglidur® G at radial loads. The plastic deformation is minimal up to a pressure of approximately 100MPa. However, it is also dependent on the service time.

**Surface pressure, page 45**



-40°C up to +130°C



80MPa



HB



## Permissible surface speeds

iglidur® G has been developed for low to medium surface speeds. The maximum values shown in table 03 can only be achieved at low pressures. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, though, this level is rarely reached due to varying application conditions.

**Surface speed, page 48**

## Temperature

The ambient temperatures strongly influence the properties of plain bearings. The temperatures prevailing in the bearing system also have an influence on the wear. With increasing temperatures, the wear increases and this effect is significant when temperatures rise over +120°C. For temperatures over +80°C an additional securing is required.

**Application temperatures, page 53**

**Additional securing, page 53**

## Friction and wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the surface speed and load (diagrams 04 and 05).

**Coefficient of friction and surfaces, page 51**

**Wear resistance, page 54**

## Shaft materials

The friction and wear are also dependent, to a large degree, on the mating partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglidur® G a ground surface with an average surface finish  $R_a = 0.8\mu\text{m}$  is recommended. Diagram 06 shows results of testing different shaft materials with plain bearings made from iglidur® G. It is important to notice that with increasing loads, the recommended hardness of the shaft increases. The "soft" shafts tend to wear themselves and thus increase the wear of the overall system. If the loads exceed 2MPa it is important to recognise that the wear rate (the gradient of the curves) clearly decreases with the hard shaft materials. If the shaft material you plan on using is not shown in these test results, please contact us.

**Shaft materials, page 56**

## Installation tolerances

iglidur® G plain bearings are standard bearings for shafts with h-tolerance (recommended minimum h9). The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, the inner diameter automatically adjusts to the E10 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table).

**Testing methods, page 61**

Chemicals	Resistance
Alcohols	+ up to 0
Diluted acids	0 up to -
Diluted alkalines	+
Fuels	+
Greases, oils without additives	+
Hydrocarbons	+
Strong acids	-
Strong alkalines	0

All data given at room temperature [+20°C]

Table 02: Chemical resistance

**Chemical table, page 1170**

	Rotating	Oscillating	linear
Long-term m/s	1.0	0.7	4.0
Short-term m/s	2.0	1.4	5.0

Table 03: Maximum surface speeds

	Dry	Greases	Oil	Water
Coefficient of friction $\mu$	0.08-0.15	0.09	0.04	0.04

Table 04: Coefficient of friction against steel ( $R_a = 1\mu\text{m}$ , 50HRC)

Ø d1 [mm]	Housing		Plain bearings		Shaft	
	H7 [mm]	E10 [mm]	E10 [mm]	h9 [mm]	h9 [mm]	h9 [mm]
0-3	+0.000	+0.010	+0.014	+0.054	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.020	+0.068	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.025	+0.083	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.032	+0.102	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.040	+0.124	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.050	+0.150	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.060	+0.180	-0.074	+0.000
> 80-120	+0.000	+0.035	+0.072	+0.212	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.085	+0.245	-0.100	+0.000

Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit

## Technical data

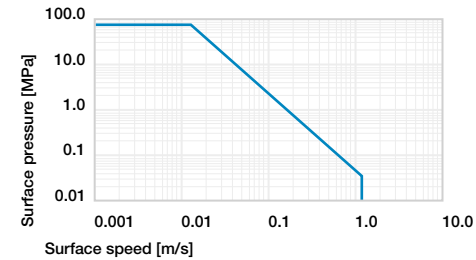


Diagram 01: Permissible pv values for iglidur® G plain bearing with a wall thickness of 1 mm dry operation against a steel shaft at +20°C, mounted in a steel housing.

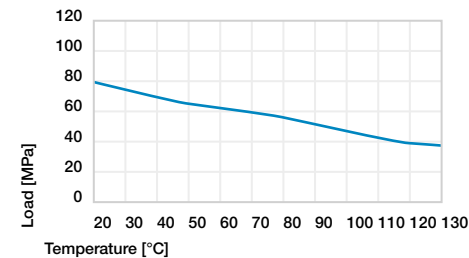


Diagram 02: Maximum recommended surface pressure as a function of temperature (80MPa at +20°C)

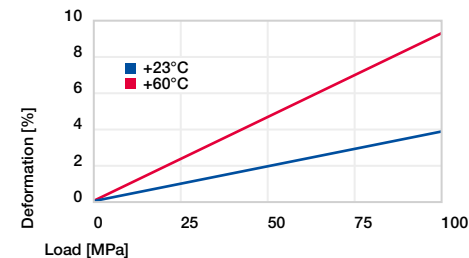


Diagram 03: Deformation under pressure and temperature

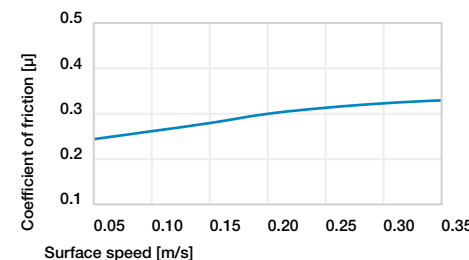


Diagram 04: Coefficient of friction as a function of the surface speed,  $p = 0.75\text{MPa}$

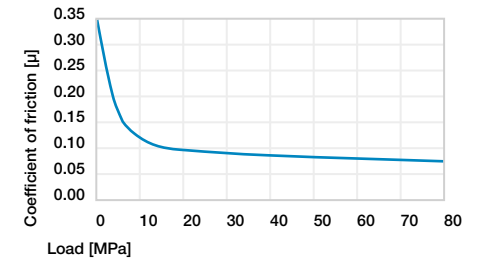


Diagram 05: Coefficient of friction as a function of the pressure,  $v = 0.01\text{m/s}$

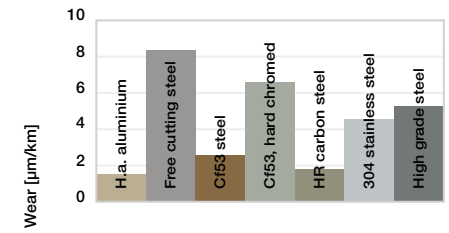


Diagram 06: Wear, rotating with different shaft materials, pressure,  $p = 1\text{MPa}$ ,  $v = 0.3\text{m/s}$


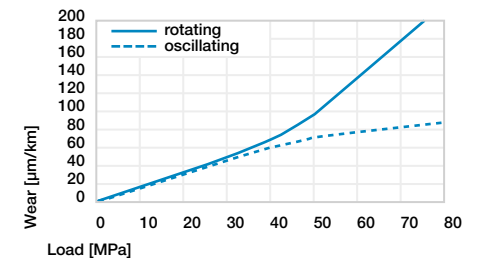


Diagram 07: Wear for oscillating and rotating applications with shaft material Cf53 hardened and ground steel, as a function of the load

# Bearing technology | Plain bearings | iglidur® G

## Sleeve bearings (form S)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

### Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2

**i** Dimensions according to ISO 3547-1 and special dimensions



Order example: **GSM-0103-02** – no minimum order quantity.

G iglidur® material S Cylindrical M Metric 01 Inner Ø d1 03 Outer Ø d2 02 Total length b1

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
1.5		3.0	2.0	<b>GSM-0103-02</b>
2.0		3.5	3.0	<b>GSM-0203-03</b>
2.5	+0.014	4.5	5.0	<b>GSM-02504-05</b>
3.0	+0.054	4.5	3.0	<b>GSM-0304-03</b>
3.0		4.5	5.0	<b>GSM-0304-05</b>
3.0		4.5	6.0	<b>GSM-0304-06</b>
4.0		5.5	4.0	<b>GSM-0405-04</b>
4.0	+0.020	5.5	6.0	<b>GSM-0405-06</b>
4.0	+0.068	7.0	5.5	<b>GSM-0407-05</b>
4.5		6.0	8.0	<b>GSM-0406-08</b>
5.0		6.0	4.6	<b>GSM-0506-046</b>
5.0	+0.010	6.0	5.0	<b>GSM-0506-05</b>
5.0	+0.040	6.0	7.0	<b>GSM-0506-07</b>
5.0		7.0	5.0	<b>GSM-0507-05</b>
5.0	+0.020	7.0	7.0	<b>GSM-0507-07</b>
5.0	+0.068	7.0	8.0	<b>GSM-0507-08</b>
5.0		7.0	10.0	<b>GSM-0507-10</b>
6.0		7.0	6.0	<b>GSM-0607-06</b>
6.0		7.0	12.0	<b>GSM-0607-12</b>
6.0	+0.010	7.0	17.0	<b>GSM-0607-17</b>
6.0	+0.040	7.0	17.5	<b>GSM-0607-17.5</b>
6.0		7.0	19.0	<b>GSM-0607-19</b>
6.0		8.0	1.5	<b>GSM-0608-015</b>
6.0		8.0	2.5	<b>GSM-0608-025</b>
6.0	+0.020	8.0	3.0	<b>GSM-0608-03</b>
6.0	+0.068	8.0	4.0	<b>GSM-0608-04</b>
6.0		8.0	5.0	<b>GSM-0608-05</b>
6.0		8.0	5.5	<b>GSM-0608-055</b>
6.0		8.0	6.0	<b>GSM-0608-06</b>

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
6.0		8.0	8.0	<b>GSM-0608-08</b>
6.0		8.0	9.5	<b>GSM-0608-09</b>
6.0	+0.020	8.0	10.0	<b>GSM-0608-10</b>
6.0	+0.068	8.0	11.8	<b>GSM-0608-11</b>
6.0		8.0	13.8	<b>GSM-0608-13</b>
7.0	+0.013	8.0	10.0	<b>GSM-0708-10</b>
7.0	+0.049	8.0	19.0	<b>GSM-0708-19</b>
7.0		9.0	8.0	<b>GSM-0709-08</b>
7.0	+0.025	9.0	9.0	<b>GSM-0709-09</b>
7.0	+0.083	9.0	10.0	<b>GSM-0709-10</b>
7.0		9.0	12.0	<b>GSM-0709-12</b>
8.0		9.0	5.0	<b>GSM-0809-05</b>
8.0	+0.013	9.0	6.0	<b>GSM-0809-06</b>
8.0	+0.049	9.0	8.0	<b>GSM-0809-08</b>
8.0		9.0	12.0	<b>GSM-0809-12</b>
8.0		10.0	5.0	<b>GSM-0810-05</b>
8.0		10.0	6.0	<b>GSM-0810-06</b>
8.0		10.0	6.8	<b>GSM-0810-07</b>
8.0		10.0	8.0	<b>GSM-0810-08</b>
8.0		10.0	10.0	<b>GSM-0810-10</b>
8.0		10.0	12.0	<b>GSM-0810-12</b>
8.0	+0.025	10.0	13.8	<b>GSM-0810-13</b>
8.0	+0.083	10.0	14.0	<b>GSM-0810-14</b>
8.0		10.0	15.0	<b>GSM-0810-15</b>
8.0		10.0	16.0	<b>GSM-0810-16</b>
8.0		10.0	18.0	<b>GSM-0810-18</b>
8.0		10.0	20.0	<b>GSM-0810-20</b>
8.0		10.0	22.0	<b>GSM-0810-22</b>
8.0		10.0	25.0	<b>GSM-0810-25</b>

<sup>3)</sup> After press-fit. Testing methods, page 61

## Product range

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
8.0	+0.040 +0.130	12.0	9.0	<b>GSM-0812-09</b>
9.0	+0.013	10.0	12.0	<b>GSM-0910-12</b>
9.0	+0.049	10.0	16.0	<b>GSM-0910-16</b>
9.0	+0.025	11.0	6.0	<b>GSM-0911-06</b>
9.0	+0.083	11.0	20.0	<b>GSM-0911-20</b>
10.0		11.0	6.0	<b>GSM-1011-06</b>
10.0		11.0	7.0	<b>GSM-1011-07</b>
10.0	+0.013	11.0	10.0	<b>GSM-1011-10</b>
10.0	+0.049	11.0	20.0	<b>GSM-1011-20</b>
10.0		11.0	25.0	<b>GSM-1011-25</b>
10.0		11.0	30.0	<b>GSM-1011-30</b>
10.0		12.0	4.0	<b>GSM-1012-04</b>
10.0		12.0	4.5	<b>GSM-1012-045</b>
10.0		12.0	5.0	<b>GSM-1012-05</b>
10.0		12.0	6.0	<b>GSM-1012-06</b>
10.0		12.0	7.0	<b>GSM-1012-07</b>
10.0		12.0	8.0	<b>GSM-1012-08</b>
10.0	+0.025	12.0	9.0	<b>GSM-1012-09</b>
10.0	+0.083	12.0	10.0	<b>GSM-1012-10</b>
10.0		12.0	12.0	<b>GSM-1012-12</b>
10.0		12.0	14.0	<b>GSM-1012-14</b>
10.0		12.0	15.0	<b>GSM-1012-15</b>
10.0		12.0	17.0	<b>GSM-1012-17</b>
10.0		12.0	20.0	<b>GSM-1012-20</b>
10.0		13.0	13.5	<b>GSM-1013-13</b>
10.0	+0.025	14.0	10.0	<b>GSM-1014-10</b>
10.0	+0.115	14.0	20.0	<b>GSM-1014-20</b>
10.0	+0.040 +0.130	16.0	10.0	<b>GSM-1016-10</b>
12.0		13.0	4.7	<b>GSM-1213-047</b>
12.0	+0.016	13.0	10.0	<b>GSM-1213-10</b>
12.0	+0.059	13.0	12.0	<b>GSM-1213-12</b>
12.0		13.0	15.0	<b>GSM-1213-15</b>
12.0		14.0	4.0	<b>GSM-1214-04</b>
12.0		14.0	5.0	<b>GSM-1214-05</b>
12.0		14.0	6.0	<b>GSM-1214-06</b>
12.0		14.0	8.0	<b>GSM-1214-08</b>
12.0		14.0	10.0	<b>GSM-1214-10</b>
12.0	+0.032	14.0	12.0	<b>GSM-1214-12</b>
12.0	+0.102	14.0	14.0	<b>GSM-1214-14</b>
12.0		14.0	15.0	<b>GSM-1214-15</b>
12.0		14.0	20.0	<b>GSM-1214-20</b>
12.0		14.0	25.0	<b>GSM-1214-25</b>
12.0		15.0	6.0	<b>GSM-1215-06</b>
12.0		15.0	22.0	<b>GSM-1215-22</b>
12.0	+0.050	16.0	10.0	<b>GSM-1216-10</b>
12.0	+0.160	16.0	20.0	<b>GSM-1216-20</b>

<sup>3)</sup> After press-fit. Testing methods, page 61

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
13.0		15.0	7.0	<b>GSM-1315-070</b>
13.0		15.0	7.5	<b>GSM-1315-075</b>
13.0		15.0	10.0	<b>GSM-1315-10</b>
13.0		15.0	15.0	<b>GSM-1315-15</b>
13.0		15.0	20.0	<b>GSM-1315-20</b>
13.0		15.0	25.0	<b>GSM-1315-25</b>
14.0		16.0	3.0	<b>GSM-1416-03</b>
14.0	+0.032 +0.102	16.0	6.0	<b>GSM-1416-06</b>
14.0		16.0	8.0	<b>GSM-1416-08</b>
14.0		16.0	10.0	<b>GSM-1416-10</b>
14.0		16.0	12.0	<b>GSM-1416-12</b>
14.0		16.0	15.0	<b>GSM-1416-15</b>
14.0		16.0	20.0	<b>GSM-1416-20</b>
14.0		16.0	25.0	<b>GSM-1416-25</b>
14.0		16.0	45.0	<b>GSM-1416-45</b>
15.0	+0.016	16.0	10.0	<b>GSM-1516-10</b>
15.0	+0.059	16.0	15.0	<b>GSM-1516-15</b>
15.0		17.0	4.0	<b>GSM-1517-04</b>
15.0		17.0	10.0	<b>GSM-1517-10</b>
15.0		17.0	12.0	<b>GSM-1517-12</b>
15.0		17.0	15.0	<b>GSM-1517-15</b>
15.0		17.0	20.0	<b>GSM-1517-20</b>
15.0		17.0	25.0	<b>GSM-1517-25</b>
16.0		18.0	5.5	<b>GSM-1618-055</b>
16.0		18.0	8.0	<b>GSM-1618-08</b>
16.0	+0.032	18.0	10.0	<b>GSM-1618-10</b>
16.0	+0.102	18.0	12.0	<b>GSM-1618-12</b>
16.0		18.0	13.5	<b>GSM-1618-13.5</b>
16.0		18.0	15.0	<b>GSM-1618-15</b>
16.0		18.0	20.0	<b>GSM-1618-20</b>
16.0		18.0	25.0	<b>GSM-1618-25</b>
16.0		18.0	30.0	<b>GSM-1618-30</b>
16.0		18.0	38.5	<b>GSM-1618-38.5</b>
16.0		18.0	50.0	<b>GSM-1618-50</b>
17.0		19.0	15.0	<b>GSM-1719-15</b>
18.0	+0.016 +0.059	19.0	15.0	<b>GSM-1819-15</b>
18.0		20.0	6.0	<b>GSM-1820-06</b>
18.0		20.0	10.0	<b>GSM-1820-10</b>
18.0		20.0	12.0	<b>GSM-1820-12</b>
18.0		20.0	15.0	<b>GSM-1820-15</b>
18.0	+0.032	20.0	20.0	<b>GSM-1820-20</b>
18.0	+0.102	20.0	25.0	<b>GSM-1820-25</b>
18.0		20.0	34.0	<b>GSM-1820-34</b>
18.0		20.0	38.0	<b>GSM-1820-38</b>
18.0		20.0	45.0	<b>GSM-1820-45</b>
18.0		22.0	30.0	<b>GSM-1822-30</b>

## Bearing technology | Plain bearings | iglidur® G


## Product range

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.	d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]		[mm]		[mm]	[mm]	
19.0	+0.040	22.0	6.0	GSM-1922-06	25.0		28.0	24.0	GSM-2528-24
19.0	+0.124	22.0	28.0	GSM-1922-28	25.0		28.0	25.0	GSM-2528-25
19.0		22.0	35.0	GSM-1922-35	25.0		28.0	30.0	GSM-2528-30
20.0	+0.020 +0.072	21.0	20.0	GSM-2021-20	25.0		28.0	35.0	GSM-2528-35
20.0		22.0	3.0	GSM-2022-03	25.0		28.0	50.0	GSM-2528-50
20.0		22.0	8.0	GSM-2022-08	26.0		30.0	16.0	GSM-2630-16
20.0		22.0	10.5	GSM-2022-105	27.0	+0.040	30.0	5.0	GSM-2730-05
20.0		22.0	15.0	GSM-2022-15	28.0	+0.124	32.0	10.5	GSM-2832-105
20.0		22.0	20.0	GSM-2022-20	28.0		32.0	12.0	GSM-2832-12
20.0		22.0	22.0	GSM-2022-22	28.0		32.0	15.0	GSM-2832-15
20.0		22.0	28.0	GSM-2022-28	28.0		32.0	20.0	GSM-2832-20
20.0		22.0	30.0	GSM-2022-30	28.0		32.0	23.0	GSM-2832-23
20.0		22.0	47.0	GSM-2022-47	28.0		32.0	25.0	GSM-2832-25
20.0		23.0	4.5	GSM-2023-045	28.0		32.0	30.0	GSM-2832-30
20.0		23.0	10.0	GSM-2023-10	28.0	+0.065	35.0	19.0	GSM-2835-19
20.0		23.0	15.0	GSM-2023-15	28.0	+0.195	35.0	28.0	GSM-2835-28
20.0		23.0	20.0	GSM-2023-20	29.0	+0.040 +0.124	33.0	6.0	GSM-2933-06
20.0		23.0	24.0	GSM-2023-24	30.0	+0.020	31.0	5.0	GSM-3031-05
20.0	+0.040	23.0	25.0	GSM-2023-25	30.0	+0.072	31.0	12.0	GSM-3031-12
20.0	+0.124	23.0	30.0	GSM-2023-30	30.0		31.0	30.0	GSM-3031-30
20.0		23.0	35.0	GSM-2023-35	30.0		34.0	12.0	GSM-3034-12
22.0		24.0	8.0	GSM-2224-08	30.0		34.0	15.0	GSM-3034-15
22.0		24.0	10.0	GSM-2224-10	30.0		34.0	20.0	GSM-3034-20
22.0		24.0	12.0	GSM-2224-12	30.0		34.0	24.0	GSM-3034-24
22.0		24.0	15.0	GSM-2224-15	30.0	+0.040 +0.124	34.0	25.0	GSM-3034-25
22.0		24.0	17.0	GSM-2224-17	30.0		34.0	30.0	GSM-3034-30
22.0		24.0	20.0	GSM-2224-20	30.0		34.0	35.0	GSM-3034-35
22.0		24.0	30.0	GSM-2224-30	30.0		34.0	40.0	GSM-3034-40
22.0		24.0	48.0	GSM-2224-48	30.0		34.0	52.5	GSM-3034-525
22.0		25.0	15.0	GSM-2225-15	32.0		36.0	15.0	GSM-3236-15
22.0		25.0	20.0	GSM-2225-20	32.0		36.0	20.0	GSM-3236-20
22.0		25.0	25.0	GSM-2225-25	32.0		36.0	30.0	GSM-3236-30
22.0		25.0	30.0	GSM-2225-30	32.0		36.0	40.0	GSM-3236-40
22.0		25.0	38.5	GSM-2225-38.5	35.0		39.0	14.0	GSM-3539-14
24.0	+0.020 +0.072	25.0	25.0	GSM-2425-25	35.0		39.0	20.0	GSM-3539-20
24.0		27.0	6.0	GSM-2427-06	35.0		39.0	25.0	GSM-3539-25
24.0		27.0	15.0	GSM-2427-15	35.0		39.0	30.0	GSM-3539-30
24.0		27.0	20.0	GSM-2427-20	35.0	+0.050	39.0	40.0	GSM-3539-40
24.0	+0.040	27.0	24.0	GSM-2427-24	35.0	+0.150	39.0	50.0	GSM-3539-50
24.0	+0.124	27.0	25.0	GSM-2427-25	35.0		41.0	50.0	GSM-3541-50
24.0		27.0	30.0	GSM-2427-30	36.0		40.0	20.0	GSM-3640-20
25.0	+0.020	26.0	23.0	GSM-2526-23	37.0		41.0	20.0	GSM-3741-20
25.0	+0.072	26.0	25.0	GSM-2526-25	38.0		42.0	25.0	GSM-3842-25
25.0		28.0	12.0	GSM-2528-12	40.0		44.0	10.0	GSM-4044-10
25.0	+0.040	28.0	15.0	GSM-2528-15	40.0		44.0	16.5	GSM-4044-16
25.0	+0.124	28.0	20.0	GSM-2528-20	40.0		44.0	20.0	GSM-4044-20
					40.0		44.0	30.0	GSM-4044-30


<sup>3)</sup> After press-fit. *Testing methods, page 61*

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.	d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]		[mm]		[mm]	[mm]	
40.0		44.0	40.0	GSM-4044-40	62.0	+0.100	67.0	35.0	GSM-6267-35
40.0		44.0	50.0	GSM-4044-50		+0.250			
40.0		44.0	52.5	GSM-4044-525	62.0		67.0	72.0	GSM-6267-72
42.0		46.0	40.0	GSM-4246-40	65.0		70.0	30.0	GSM-6570-30
44.0		48.0	20.0	GSM-4448-20	65.0		70.0	50.0	GSM-6570-50
45.0		50.0	10.0	GSM-4550-10	65.0		70.0	104.0	GSM-6570-104
45.0		50.0	20.0	GSM-4550-20	68.0		73.0	60.0	GSM-6873-60
45.0		50.0	22.0	GSM-4550-22	70.0	+0.060	75.0	60.0	GSM-7075-60
45.0		50.0	23.5	GSM-4550-235	72.0	+0.180	77.0	24.5	GSM-7277-24.5
45.0	+0.050	50.0	30.0	GSM-4550-30	72.0		77.0	76.0	GSM-7277-76
45.0	+0.150	50.0	38.0	GSM-4550-38	75.0		80.0	40.0	GSM-7580-40
45.0		50.0	40.0	GSM-4550-40	75.0		80.0	60.0	GSM-7580-60
45.0		50.0	50.0	GSM-4550-50	80.0		85.0	60.0	GSM-8085-60
50.0		55.0	20.0	GSM-5055-20	80.0		85.0	100.0	GSM-8085-100
50.0		55.0	25.0	GSM-5055-25	85.0		90.0	100.0	GSM-8590-100
50.0		55.0	30.0	GSM-5055-30	90.0		95.0	100.0	GSM-9095-100
50.0		55.0	40.0	GSM-5055-40	95.0		100.0	100.0	GSM-95100-100
50.0		55.0	50.0	GSM-5055-50	100.0		105.0	21.5	GSM-100105-21.5
50.0		55.0	60.0	GSM-5055-60	100.0	+0.072	105.0	30.0	GSM-100105-30
52.0		57.0	20.0	GSM-5257-20	100.0	+0.212	105.0	32.0	GSM-100105-32
55.0		60.0	20.0	GSM-5560-20	100.0		105.0	100.0	GSM-100105-100
55.0		60.0	40.0	GSM-5560-40	105.0		110.0	100.0	GSM-105110-100
55.0		60.0	50.0	GSM-5560-50	110.0		115.0	100.0	GSM-110115-100
55.0	+0.060	60.0	60.0	GSM-5560-60	120.0		125.0	100.0	GSM-120125-100
60.0	+0.180	65.0	30.0	GSM-6065-30	125.0		130.0	100.0	GSM-125130-100
60.0		65.0	40.0	GSM-6065-40	130.0		135.0	100.0	GSM-130135-100
60.0		65.0	50.0	GSM-6065-50	135.0	+0.085	140.0	80.0	GSM-135140-80
60.0		65.0	60.0	GSM-6065-60	140.0	+0.245	145.0	100.0	GSM-140145-100
60.0		65.0	70.0	GSM-6065-70	140.0		145.0	104.0	GSM-140145-104
					150.0		155.0	100.0	GSM-150155-100

<sup>3)</sup> After press-fit. *Testing methods, page 61*

 **Available from stock**  
Detailed information about delivery time online.  
[www.igus.eu/24](http://www.igus.eu/24)


 **Order online**  
including delivery times, prices, online tools  
[www.igus.eu/G](http://www.igus.eu/G)

 **Ordering note**  
Our prices are scaled according to order quantities, current prices can be found online.

Discount scaling		
1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

**No minimum order value.**  
**No low-quantity surcharges.**  
**Free shipping within Germany for orders above €150.**

## Flange bearings (form F)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2

**i** Dimensions according to ISO 3547-1 and special dimensions



Order example: **GFM-0304-02** – no minimum order quantity.

**G** iglidur® material **F** With flange **M** Metric **03** Inner Ø d1 **04** Outer Ø d2 **02** Total length b1

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	[mm]	[mm]	
3.0		4.5	7.5	2.0	0.50	<b>GFM-0304-02</b>
3.0	+0.014	4.5	7.5	2.7	0.75	<b>GFM-0304-0275</b>
3.0	+0.054	4.5	7.5	3.0	0.75	<b>GFM-0304-03</b>
3.0		4.5	7.5	5.0	0.75	<b>GFM-0304-05</b>
3.0		4.5	7.0	5.0	0.75	<b>GFM-030407-05</b>
4.0	+0.010	5.0	9.5	4.0	0.50	<b>GFM-04050-04</b>
4.0	+0.040	5.0	9.5	6.0	0.50	<b>GFM-04050-06</b>
4.0		5.5	9.5	2.5	0.75	<b>GFM-0405-0255</b>
4.0	+0.020	5.5	9.5	3.0	0.75	<b>GFM-0405-03</b>
4.0	+0.068	5.5	9.5	4.0	0.75	<b>GFM-0405-04</b>
4.0		5.5	9.5	6.0	0.75	<b>GFM-0405-06</b>
4.0		5.5	8.0	10.0	1.00	<b>GFM-040508-10</b>
5.0		6.0	10.0	3.5	0.50	<b>GFM-0506-035</b>
5.0	+0.010	6.0	10.0	4.0	0.50	<b>GFM-0506-04</b>
5.0	+0.040	6.0	10.0	5.0	0.50	<b>GFM-0506-05</b>
5.0		6.0	10.0	6.0	0.50	<b>GFM-0506-06</b>
5.0		6.0	10.0	15.3	0.50	<b>GFM-0506-15</b>
5.0		7.0	11.0	3.5	1.00	<b>GFM-0507-03</b>
5.0		7.0	11.0	4.0	1.00	<b>GFM-0507-04</b>
5.0		7.0	15.0	4.0	1.00	<b>GFM-050715-04</b>
5.0	+0.020	7.0	11.0	5.0	1.00	<b>GFM-0507-05</b>
5.0	+0.068	7.0	9.5	5.0	1.00	<b>GFM-050709-05</b>
5.0		7.0	11.0	7.0	1.00	<b>GFM-0507-07</b>
5.0		7.0	11.0	11.0	1.00	<b>GFM-0507-11</b>
5.0		7.0	11.0	14.5	1.00	<b>GFM-0507-145</b>
5.0		7.0	11.0	30.0	1.00	<b>GFM-0507-30</b>
6.0	+0.010	7.0	11.0	2.4	0.50	<b>GFM-0607-024</b>
6.0	+0.040	7.0	11.0	4.5	0.50	<b>GFM-0607-045</b>

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	[mm]	[mm]	
6.0	+0.010	7.0	11.0	6.0	0.50	<b>GFM-0607-06</b>
6.0	+0.040	7.0	11.0	10.0	0.50	<b>GFM-0607-10</b>
6.0		8.0	12.0	2.5	1.00	<b>GFM-0608-025</b>
6.0		8.0	14.0	2.8	1.00	<b>GFM-060814-028</b>
6.0		8.0	12.0	4.0	1.00	<b>GFM-0608-04</b>
6.0		8.0	12.0	4.8	1.00	<b>GFM-0608-048</b>
6.0		8.0	12.0	5.0	1.00	<b>GFM-0608-05</b>
6.0	+0.020	8.0	12.0	6.0	1.00	<b>GFM-0608-06</b>
6.0	+0.068	8.0	12.0	7.0	1.00	<b>GFM-0608-07</b>
6.0		8.0	12.0	8.0	1.00	<b>GFM-0608-08</b>
6.0		8.0	12.0	10.0	1.00	<b>GFM-0608-10</b>
6.0		8.0	14.0	12.0	1.00	<b>GFM-060814-12</b>
6.0		8.0	12.0	25.0	1.00	<b>GFM-0608-25</b>
6.0		8.0	12.0	35.0	1.00	<b>GFM-0608-35</b>
7.0		8.0	12.0	1.7	0.50	<b>GFM-0708-017</b>
7.0	+0.013	8.0	12.0	3.0	0.50	<b>GFM-0708-03</b>
7.0	+0.049	8.0	12.0	6.0	0.50	<b>GFM-0708-06</b>
7.0		8.0	12.0	8.0	0.50	<b>GFM-0708-08</b>
7.0		9.0	15.0	3.5	1.00	<b>GFM-0709-035</b>
7.0		9.0	15.0	6.0	1.00	<b>GFM-0709-06</b>
7.0	+0.025	9.0	15.0	10.0	1.00	<b>GFM-0709-10</b>
7.0	+0.083	9.0	19.0	10.0	1.00	<b>GFM-070919-10</b>
7.0		9.0	15.0	12.0	1.00	<b>GFM-0709-12</b>
8.0		9.0	15.0	3.0	0.50	<b>GFM-0809-03</b>
8.0	+0.013	9.0	13.0	3.5	0.50	<b>GFM-0809-035</b>
8.0	+0.049	9.0	13.0	5.5	0.50	<b>GFM-0809-055</b>
8.0		9.0	13.0	8.0	0.50	<b>GFM-0809-08</b>
8.0		9.0	13.0	12.0	0.50	<b>GFM-0809-12</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*

## Product range

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	[mm]	[mm]	
8.0		10.0	15.0	3.0	1.00	<b>GFM-0810-03</b>
8.0	+0.025	10.0	18.0	3.0	1.00	<b>GFM-081018-03</b>
8.0	+0.083	10.0	15.0	4.0	1.00	<b>GFM-0810-04</b>
8.0	+0.040	10.0	14.0	5.0	1.00	<b>GFM-081014-05</b>
8.0	+0.098	10.0	15.0	5.5	1.00	<b>GFM-0810-05</b>
8.0		10.0	14.0	6.0	1.00	<b>GFM-081014-06</b>
8.0		10.0	15.0	6.5	1.00	<b>GFM-0810-065</b>
8.0	+0.025	10.0	15.0	7.5	1.00	<b>GFM-0810-07</b>
8.0	+0.083	10.0	13.0	8.0	1.00	<b>GFM-081013-08</b>
8.0		10.0	14.0	8.0	1.00	<b>GFM-081014-08</b>
8.0		10.0	15.0	9.5	1.00	<b>GFM-0810-09</b>
8.0		10.0	15.0	10.0	1.00	<b>GFM-0810-10</b>
8.0	+0.040	10.0	14.0	10.0	1.00	<b>GFM-081014-10</b>
8.0	+0.098	10.0	14.0	11.0	1.00	<b>GFM-0810-11</b>
8.0		10.0	16.0	11.5	1.50	<b>GFM-081016-11</b>
8.0		10.0	12.0	12.5	1.00	<b>GFM-081012-125</b>
8.0	+0.025	10.0	15.0	15.0	1.00	<b>GFM-0810-15</b>
8.0	+0.083	10.0	16.0	15.0	1.50	<b>GFM-081016-15</b>
8.0		10.0	17.0	15.0	1.00	<b>GFM-081017-15</b>
8.0		10.0	15.0	25.0	1.00	<b>GFM-0810-25</b>
8.0		10.0	15.0	30.0	1.00	<b>GFM-0810-30</b>
8.0	+0.040	12.0	16.0	6.0	2.00	<b>GFM-0812-06</b>
8.0	+0.130	12.0	21.0	8.0	2.00	<b>GFM-081221-08</b>
9.0	+0.013	10.0	15.0	6.5	0.50	<b>GFM-0910-065</b>
9.0	+0.049	10.0	15.0	17.5	0.50	<b>GFM-0910-17</b>
10.0	+0.013	11.0	20.0	3.5	0.50	<b>GFM-1011-03</b>
10.0	+0.046	11.0	20.0	4.4	0.50	<b>GFM-1011-044</b>
10.0	+0.013	11.0	15.0	10.0	0.50	<b>GFM-1011-10</b>
10.0	+0.049	11.0	15.0	10.0	0.50	<b>GFM-1011-10</b>
10.0		12.0	18.0	3.5	1.00	<b>GFM-1012-035</b>
10.0		12.0	18.0	4.0	1.00	<b>GFM-1012-04</b>
10.0		12.0	18.0	5.0	1.00	<b>GFM-1012-05</b>
10.0		12.0	18.0	6.0	1.00	<b>GFM-1012-06</b>
10.0		12.0	16.0	6.0	1.00	<b>GFM-101216-06</b>
10.0		12.0	18.0	7.0	1.00	<b>GFM-1012-07</b>
10.0	+0.025	12.0	18.0	9.0	1.00	<b>GFM-1012-09</b>
10.0	+0.083	12.0	16.0	9.0	1.00	<b>GFM-101216-09</b>
10.0		12.0	18.0	10.0	1.00	<b>GFM-1012-10</b>
10.0		12.0	18.0	12.0	1.00	<b>GFM-1012-12</b>
10.0		12.0	15.0	12.0	1.00	<b>GFM-101215-12</b>
10.0		12.0	18.0	15.0	1.00	<b>GFM-1012-15</b>
10.0		12.0	18.0	15.0	1.00	<b>GFM-101216-15</b>
10.0		12.0	18.0	17.0	1.00	<b>GFM-1012-17</b>
11.0	+0.016	12.0	16.0	6.0	0.50	<b>GFM-1112-06</b>
12.0	+0.059	13.0	17.0	3.0	0.50	<b>GFM-1213-03</b>
12.0		13.0	17.0	12.0	0.50	<b>GFM-1213-12</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	[mm]	[mm]	
12.0	+0.016	13.0	15.0	12.0	0.50	<b>GFM-121315-12</b>
12.0	+0.059	13.0	15.0	12.0	0.50	<b>GFM-121315-12</b>
12.0		14.0	20.0	3.0	1.00	<b>GFM-1214-03</b>
12.0		14.0	18.0	4.0	1.00	<b>GFM-121418-04</b>
12.0		14.0	20.0	5.0	1.00	<b>GFM-1214-05</b>
12.0		14.0	20.0	6.0	1.00	<b>GFM-1214-06</b>
12.0		14.0	20.0	7.0	1.00	<b>GFM-1214-07</b>
12.0		14.0	18.0	8.0	1.00	<b>GFM-121418-08</b>
12.0		14.0	20.0	9.0	1.00	<b>GFM-1214-09</b>
12.0		14.0	20.0	10.0	1.00	<b>GFM-1214-10</b>
12.0		14.0	18.0	10.0	1.00	<b>GFM-121418-10</b>
12.0		14.0	20.0	11.0	1.00	<b>GFM-1214-11</b>
12.0		14.0	20.0	12.0	1.00	<b>GFM-1214-12</b>
12.0		14.0	18.0	12.0	1.00	<b>GFM-121418-12</b>
12.0		14.0	20.0	15.0	1.00	<b>GFM-1214-15</b>
12.0		14.0	18.0	15.0	1.00	<b>GFM-121418-15</b>
12.0		14.0	20.0	17.0	1.00	<b>GFM-1214-17</b>
12.0	+0.032	14.0	20.0	20.0	1.00	<b>GFM-1214-20</b>
12.0	+0.102	14.0	18.0	20.0	1.00	<b>GFM-121418-20</b>
12.0		14.0	20.0	24.0	1.00	<b>GFM-1214-24</b>
12.0		14.0	20.0	31.0	1.00	<b>GFM-1214-31</b>
12.0		14.0	20.0	40.0	1.00	<b>GFM-1214-40</b>
13.0		15.0	22.0	6.0	1.00	<b>GFM-1315-06</b>
13.0		15.0	22.0	8.0	1.00	<b>GFM-1315-08</b>
13.0		15.0	22.0	40.0	1.00	<b>GFM-131522-40</b>
14.0		16.0	22.0	3.0	1.00	<b>GFM-1416-03</b>
14.0		16.0	22.0	4.0	1.00	<b>GFM-1416-04</b>
14.0		16.0	22.0	6.0	1.00	<b>GFM-1416-06</b>
14.0		16.0	22.0	8.0	1.00	<b>GFM-1416-08</b>
14.0		16.0	22.0	10.0	1.00	<b>GFM-1416-10</b>
14.0		16.0	22.0	12.0	1.00	<b>GFM-1416-12</b>
14.0		16.0	22.0	17.0	1.00	<b>GFM-1416-17</b>
14.0		16.0	22.0	21.0	1.00	<b>GFM-1416-21</b>
15.0		16.0	20.0	2.0	0.50	<b>GFM-1516-02</b>
15.0	+0.016	16.0	20.0	2.5	0.50	<b>GFM-1516-025</b>
15.0	+0.059	16.0	20.0	3.0	0.50	<b>GFM-1516-03</b>
15.0		16.0	20.0	15.0	0.50	<b>GFM-1516-15</b>
15.0		17.0	23.0	4.0	1.00	<b>GFM-1517-04</b>
15.0		17.0	23.0	4.5	1.00	<b>GFM-1517-045</b>
15.0		17.0	23.0	5.0	1.00	<b>GFM-</b>



# Bearing technology | Plain bearings | iglidur® G

d1	d1	d2	d3	b1	b2	Part No.	d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13		[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
16.0		18.0	24.0	9.0	1.00	GFM-1618-09	28.0		30.0	36.0	31.0	1.00	GFM-283036-31
16.0		18.0	24.0	12.0	1.00	GFM-1618-12	28.0		30.0	35.0	36.0	1.00	GFM-2830-36
16.0		18.0	24.0	16.0	1.00	GFM-1618-16	28.0		30.0	35.0	48.0	1.00	GFM-2830-48
16.0		18.0	24.0	17.0	1.00	GFM-1618-17	28.0		32.0	39.0	20.0	2.00	GFM-283239-20
16.0		18.0	24.0	21.0	1.00	GFM-1618-21	28.0		32.0	50.0	35.0	2.00	GFM-283250-35
17.0		19.0	25.0	9.0	1.00	GFM-1719-09	30.0		31.0	36.0	20.0	0.50	GFM-3031-20
17.0		19.0	25.0	16.0	1.00	GFM-1719-16	30.0		31.0	35.0	30.0	0.50	GFM-3031-30
17.0		19.0	25.0	25.0	1.00	GFM-1719-25	30.0		32.0	37.0	4.0	1.00	GFM-3032-04
18.0		20.0	26.0	4.0	1.00	GFM-1820-04	30.0	+0.040	32.0	37.0	12.0	1.00	GFM-3032-12
18.0	+0.032	20.0	26.0	6.0	1.00	GFM-1820-06	30.0	+0.124	32.0	37.0	17.5	1.00	GFM-3032-17
18.0	+0.102	20.0	22.0	6.0	1.00	GFM-182022-06	30.0		32.0	37.0	22.0	1.00	GFM-3032-22
18.0		20.0	26.0	9.0	1.00	GFM-1820-09	30.0		34.0	42.0	9.0	2.00	GFM-3034-09
18.0		20.0	26.0	11.0	1.00	GFM-1820-11	30.0		34.0	40.0	10.0	2.00	GFM-303440-10
18.0		20.0	26.0	12.0	1.00	GFM-1820-12	30.0		34.0	42.0	16.0	2.00	GFM-3034-16
18.0		20.0	26.0	17.0	1.00	GFM-1820-17	30.0		34.0	42.0	20.0	2.00	GFM-3034-20
18.0		20.0	26.0	22.0	1.00	GFM-1820-22	30.0		34.0	42.0	26.0	2.00	GFM-3034-26
18.0		20.0	26.0	30.0	1.00	GFM-1820-30	30.0		34.0	42.0	37.0	2.00	GFM-3034-37
18.0		20.0	26.0	32.0	1.00	GFM-1820-32	32.0		36.0	40.0	16.0	2.00	GFM-3236-16
18.0		22.0	26.0	28.0	2.00	GFM-1822-28	32.0		36.0	40.0	26.0	2.00	GFM-3236-26
20.0		21.0	26.0	3.5	0.50	GFM-2021-035	34.0		38.0	50.0	35.0	2.00	GFM-343850-35
20.0	+0.020	21.0	25.0	15.0	0.50	GFM-2021-15	35.0		39.0	47.0	5.8	2.00	GFM-3539-058
20.0	+0.072	21.0	25.0	20.0	0.50	GFM-2021-20	35.0		39.0	47.0	7.0	2.00	GFM-3539-07
20.0		23.0	30.0	7.0	1.50	GFM-2023-07	35.0		39.0	47.0	12.0	2.00	GFM-3539-12
20.0		23.0	26.0	7.0	1.50	GFM-202326-07	35.0		39.0	47.0	16.0	2.00	GFM-3539-16
20.0		23.0	30.0	11.5	1.50	GFM-2023-11	35.0		39.0	47.0	26.0	2.00	GFM-3539-26
20.0		23.0	28.0	15.0	1.50	GFM-202328-15	35.0		39.0	47.0	36.0	2.00	GFM-3539-36
20.0		23.0	30.0	16.5	1.50	GFM-2023-16	38.0		42.0	54.0	10.0	2.00	GFM-3842-10
20.0		23.0	29.0	20.0	1.50	GFM-202329-20	38.0		42.0	54.0	22.0	2.00	GFM-3842-22
20.0		23.0	30.0	21.5	1.50	GFM-2023-21	40.0		44.0	52.0	7.0	2.00	GFM-4044-07
20.0	+0.040	23.0	26.0	21.5	1.50	GFM-202326-21	40.0		44.0	52.0	14.0	2.00	GFM-4044-14
22.0	+0.124	24.0	30.0	25.0	1.00	GFM-2224-25	40.0	+0.050	44.0	52.0	20.0	2.00	GFM-4044-20
22.0		25.0	29.0	4.5	1.50	GFM-222529-045	40.0	+0.150	44.0	52.0	30.0	2.00	GFM-4044-30
22.0		25.0	30.0	21.5	1.50	GFM-222530-215	40.0		44.0	52.0	40.0	2.00	GFM-4044-40
22.0		25.0	30.0	25.0	1.50	GFM-222530-25	40.0		44.0	52.0	50.0	2.00	GFM-4044-50
22.0		25.0	35.0	31.5	1.50	GFM-222535-315	40.0		46.0	50.0	20.0	2.00	GFM-4046-20
24.0		27.0	32.0	7.0	1.50	GFM-2427-07	42.0		46.0	53.0	19.0	2.00	GFM-4246-19
24.0		27.0	32.0	10.5	1.50	GFM-2427-10	45.0		50.0	58.0	25.0	2.00	GFM-4550-25
25.0	+0.020	26.0	30.0	25.0	0.50	GFM-2526-25	45.0		50.0	58.0	30.0	2.00	GFM-4550-30
25.0	+0.072	27.0	32.0	7.0	1.00	GFM-2527-07	45.0		50.0	58.0	50.0	2.00	GFM-4550-50
25.0		27.0	32.0	48.0	1.00	GFM-2527-48	50.0		55.0	63.0	7.0	2.00	GFM-5055-07
25.0		28.0	30.0	10.0	1.50	GFM-252830-10	50.0		55.0	63.0	10.0	2.00	GFM-5055-10
25.0		28.0	35.0	11.5	1.50	GFM-2528-11	50.0		55.0	63.0	25.0	2.00	GFM-5055-25
25.0	+0.040	28.0	35.0	16.5	1.50	GFM-2528-16	50.0		55.0	63.0	40.0	2.00	GFM-5055-40
25.0	+0.124	28.0	35.0	21.5	1.50	GFM-2528-21	50.0		55.0	63.0	50.0	2.00	GFM-5055-50
26.0		30.0	37.0	12.0	2.00	GFM-2630-12	60.0	+0.060	65.0	73.0	7.0	2.00	GFM-6065-07
27.0		30.0	38.0	20.0	1.50	GFM-2730-20	60.0	+0.180	65.0	73.0	22.0	2.00	GFM-6065-22
28.0		30.0	35.0	10.0	1.00	GFM-2830-10	60.0		65.0	73.0	30.0	2.00	GFM-6065-30
							60.0		65.0	73.0	50.0	2.00	GFM-6065-50

<sup>3)</sup> After press-fit. Testing methods, page 61

EN 09/2023



# Product range

d1	d1	d2	d3	b1	b2	Part No.	d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13		[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
60.0		65.0	80.0	62.0	2.00	GFM-606580-62	100.0		105.0	113.0	100.0	2.50	GFM-100105-100
65.0		70.0	78.0	50.0	2.00	GFM-6570-50	110.0	+0.072	115.0	123.0	100.0	2.50	GFM-110115-100
70.0		75.0	83.0	50.0	2.00	GFM-7075-50	120.0	+0.212	125.0	133.0	80.0	2.50	GFM-120125-80
70.0	+0.060	75.0	83.0	85.5	2.00	GFM-7075-855	120.0		125.0	133.0	100.0	2.50	GFM-120125-100
75.0	+0.180	80.0	88.0	50.0	2.00	GFM-7580-50	125.0		130.0	138.0	100.0	2.50	GFM-125130-100
80.0		85.0	93.0	50.0	2.50	GFM-8085-50	130.0		135.0	143.0	100.0	2.50	GFM-130135-100
80.0		85.0	93.0	100.0	2.50	GFM-8085-100	140.0	+0.085	145.0	153.0	100.0	2.50	GFM-140145-100
85.0		90.0	98.0	100.0	2.50	GFM-8590-100	150.0	+0.245	155.0	163.0	40.0	2.50	GFM-150155-40
90.0	+0.072	95.0	103.0	100.0	2.50	GFM-9095-100	150.0		155.0	163.0	100.0	2.50	GFM-150155-100
95.0	+0.212	100.0	108.0	100.0	2.50	GFM-95100-100	195.0	+0.100	205.0	240.0	65.0	5.00	GFM-195205240-65
100.0		105.0	113.0	42.5	2.50	GFM-100105-425		+0.285					

<sup>3)</sup> After press-fit. Testing methods, page 61



### Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



### Order online

including delivery times, prices, online tools

[www.igus.eu/G](http://www.igus.eu/G)



### Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

### Discount scaling

1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.


No low-quantity surcharges.

Free shipping within Germany for orders above €150.

EN 09/2023



Thrust washer (form T)



**i** Dimensions according to ISO 3547-1 and special dimensions

**i** Order example: **GTM-0408-005** – no minimum order quantity.  
G iglidur® material T Thrust washer M Metric 04 Inner Ø d1 08 Outer Ø d2 005 Height s

d1	d2	d4	d5	h	d6	Øs	Part No.
+0.25	-0.25	-0.12 +0.12	+0.375 +0.125	+0.2/-0.2	+0.12	-0.05	
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
4	8	<sup>4)</sup>	<sup>4)</sup>	0.2	8	0.5	GTM-0408-005
4	9	<sup>4)</sup>	<sup>4)</sup>	0.3	9	0.6	GTM-0409-006
4	9	<sup>4)</sup>	<sup>4)</sup>	0.3	9	1.6	GTM-0409-016
4	10	<sup>4)</sup>	<sup>4)</sup>	0.2	10	0.5	GTM-0410-005
4	11	<sup>4)</sup>	<sup>4)</sup>	0.2	11	0.5	GTM-0411-005
5	9.5	<sup>4)</sup>	<sup>4)</sup>	0.3	9.5	0.6	GTM-0509-006
6	12	<sup>4)</sup>	<sup>4)</sup>	1	12	1.5	GTM-0612-015
6	15	<sup>4)</sup>	<sup>4)</sup>	1	15	1.5	GTM-0615-015
6	20	13	1.5	1	20	1.5	GTM-0620-015
6.2	11	<sup>4)</sup>	<sup>4)</sup>	0.7	11	1	GTM-0611-010
7	12	<sup>4)</sup>	<sup>4)</sup>	0.2	12	0.5	GTM-0712-005
7	13	<sup>4)</sup>	<sup>4)</sup>	0.2	13	0.5	GTM-0713-005
8	15	<sup>4)</sup>	<sup>4)</sup>	0.2	15	0.5	GTM-0815-005
8	15	<sup>4)</sup>	<sup>4)</sup>	1	15	1.5	GTM-0815-015
8	18	<sup>4)</sup>	<sup>4)</sup>	0.7	18	1	GTM-0818-010
8	18	13	1.5	1	18	1.5	GTM-0818-015
8	18	<sup>4)</sup>	<sup>4)</sup>	1.5	18	2	GTM-0818-020
9	13	<sup>4)</sup>	<sup>4)</sup>	0.7	13	1	GTM-0913-010
9	18	13.5	1.5	1	18	1.5	GTM-0918-015
10	17.8	<sup>4)</sup>	<sup>4)</sup>	0.2	17.8	0.5	GTM-1018-005
10	18	<sup>4)</sup>	<sup>4)</sup>	0.7	18	1	GTM-1018-010
10	18	<sup>4)</sup>	<sup>4)</sup>	1	18	1.5	GTM-1018-015
10	18	<sup>4)</sup>	<sup>4)</sup>	1.5	18	2	GTM-1018-020
10	20	<sup>4)</sup>	<sup>4)</sup>	0.7	20	1.5	GTM-1020-015
11	15	<sup>4)</sup>	<sup>4)</sup>	0.7	15	1	GTM-1115-010
11	27	<sup>4)</sup>	<sup>4)</sup>	0.2	27	0.5	GTM-1127-005
12	24	18	1.5	1	24	1.5	GTM-1224-015
12	30	<sup>4)</sup>	<sup>4)</sup>	1	30	1.5	GTM-1230-015

<sup>4)</sup> Design without fixing hole

Product range

d1	d2	d4	d5	h	d6	Øs	Part No.
+0.25	-0.25	-0.12 +0.12	+0.375 +0.125	+0.2/-0.2	+0.12	-0.05	
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
14	20	<sup>4)</sup>	<sup>4)</sup>	1	20	1.5	GTM-1420-015
14	26	20	2	1	26	1.5	GTM-1426-015
15	19	<sup>4)</sup>	<sup>4)</sup>	0.5	19	0.8	GTM-1519-008
15	22	<sup>4)</sup>	<sup>4)</sup>	0.5	22	0.8	GTM-1522-008
15	24	19.5	1.5	1	24	1.5	GTM-1524-015
15	24	<sup>4)</sup>	<sup>4)</sup>	2	24	2.75	GTM-1524-0275
16	28	<sup>4)</sup>	<sup>4)</sup>	0.7	28	1	GTM-1628-010
16	30	22	2	1	30	1.5	GTM-1630-015
18	32	25	2	1	32	1.5	GTM-1832-015
20	36	28	3	1	36	1.5	GTM-2036-015
22	30	<sup>4)</sup>	<sup>4)</sup>	1	30	1.5	GTM-2230-015
22	38	30	3	1	38	1.5	GTM-2238-015
24	42	33	3	1	42	1.5	GTM-2442-015
26	44	35	3	1	44	1.5	GTM-2644-015
28	48	38	4	1	48	1.5	GTM-2848-015
28.5	35.8	<sup>4)</sup>	<sup>4)</sup>	0.2	35.8	0.5	GTM-2835-005
32	45.8	<sup>4)</sup>	<sup>4)</sup>	0.7	45.8	1	GTM-3246-010
32	54	43	4	1	54	1.5	GTM-3254-015
38	62	50	4	1	62	1.5	GTM-3862-015
40	60	<sup>4)</sup>	<sup>4)</sup>	<sup>4)</sup>	60	3.5	GTM-4060-035
42	66	54	4	1	66	1.5	GTM-4266-015
48	60	<sup>4)</sup>	<sup>4)</sup>	1.5	74	2	GTM-4860-020
48	74	61	4	1.5	74	2	GTM-4874-020
52	78	65	4	1.5	78	2	GTM-5278-020
52.5	69	<sup>4)</sup>	<sup>4)</sup>	1.5	69	2	GTM-52569-020
62	78	<sup>4)</sup>	<sup>4)</sup>	1.5	78	2	GTM-6278-020
62	90	<sup>4)</sup>	<sup>4)</sup>	0.7	90	1	GTM-6290-010
62	90	76	4	1.5	90	2	GTM-6290-020
68	81	<sup>4)</sup>	<sup>4)</sup>	1.5	81	2	GTM-6881-020
78	114	<sup>4)</sup>	<sup>4)</sup>	1	114	1.5	GTM-78114-015
80.5	114	<sup>4)</sup>	<sup>4)</sup>	1	114	1.5	GTM-80114-015

<sup>4)</sup> Design without fixing hole


**Available from stock**  
Detailed information about delivery time online.  
[www.igus.eu/24](http://www.igus.eu/24)

**Order online**  
including delivery times, prices, online tools  
[www.igus.eu/G](http://www.igus.eu/G)

**Ordering note**  
Our prices are scaled according to order quantities, current prices can be found online.

Discount scaling		
1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.  
No low-quantity surcharges.  
Free shipping within Germany for orders above €150.

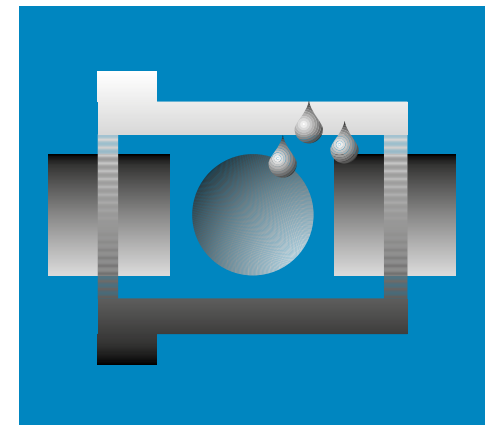

## More universal

The advanced development of iglidur® G  
**iglidur® G1**



### When to use it?

- When a universal all-round bearing is required
- When low moisture absorption is fundamental
- For low to medium speeds
- For pivoting and rotational movements



### When not to use it?

- When high shock, impact and edge loads occur  
*iglidur® G*
- When lowest wear is required  
*iglidur® W300*
- When the ultimate media resistance is required  
*iglidur® X*
- For underwater applications  
*iglidur® H370*

# Bearing technology | Plain bearings | iglidur® G1



Ø  
4.0-50.0mm



Also available  
as:



Bar stock,  
round bar  
Page 743



Bar stock,  
plate  
Page 773



tribo-tape liner  
Page 781



Guide rings  
Page 641



Two hole  
flange  
bearings  
Page 667



Moulded  
special parts  
Page 696



igubal®  
spherical balls  
Page 993

## More universal The advanced development of iglidur® G

The most successful plastic bearing in the world - iglidur® G - improved all round: iglidur® G1, the new standard.

- Double service life at high loads
- Up to 4 times less wear at low loads
- Continuous operating temperatures up to +180°C
- Press-fit up to +120°C (iglidur® G: up to +80°C)
- Moisture absorption reduced by 50%

### Typical application areas

- Mechanical engineering
- Automation
- Sports and leisure
- Automotive industry
- Mechatronics

Descriptive technical specifications				
Wear resistance at +23°C	-	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>		+
Wear resistance at +90°C	-	<div style="width: 90%; height: 10px; background-color: #0070C0;"></div>		+
Wear resistance at +150°C	-	<div style="width: 80%; height: 10px; background-color: #0070C0;"></div>		+
Slide property	-	<div style="width: 70%; height: 10px; background-color: #0070C0;"></div>		+
Wear resistance under water	-	<div style="width: 20%; height: 10px; background-color: #0070C0;"></div>		+
Media resistance	-	<div style="width: 60%; height: 10px; background-color: #0070C0;"></div>		+
Resistant to edge pressures	-	<div style="width: 50%; height: 10px; background-color: #0070C0;"></div>		+
Resistant to shock and impact loads	-	<div style="width: 40%; height: 10px; background-color: #0070C0;"></div>		+
Dirt resistance	-	<div style="width: 30%; height: 10px; background-color: #0070C0;"></div>		+

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)

## Technical data

General properties		Testing method	
Density	g/cm³	1.58	
Colour		grey	
Max. moisture absorption at +23°C/50% r.h.	% weight	0.2	DIN 53495
Max. moisture absorption	% weight	1.7	
Coefficient of friction, dynamic, against steel	μ	0.10-0.29	
pv value, max. (dry)	MPa · m/s	0.60	
Mechanical properties			
Flexural modulus	MPa	11,486	DIN 53457
Flexural strength at +20°C	MPa	178	DIN 53452
Compressive strength	MPa	115	
Max. permissible surface pressure (+20°C)	MPa	91	
Shore D hardness		81	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+180	
Max. application temperature short-term	°C	+220	
Min. application temperature	°C	-40	
Thermal conductivity	W/m · K	0.25	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	3.7	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	> 10 <sup>9</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>9</sup>	DIN 53482

Table 01: Material properties

The requirement profile is demanding: comprehensive advanced development of the successful all-round classic iglidur® G. This has been achieved especially in terms of moisture absorption, thermal properties and consistently improved wear resistance. Only with shock, impact and edge loads, the robustness of iglidur® G could not quite be achieved.

### Moisture absorption

The moisture absorption of iglidur® G1 plain bearings in ambient conditions is approximately 0.2% weight. The saturation limit submerged in water is 1.7% weight. This must be taken into account for these types of applications.

### Vacuum

In vacuum, any present moisture is released as vapour. Use in vacuum is only possible with dehumidified iglidur® G1 bearings.

### Radiation resistance

Plain bearings made from iglidur® G1 are resistant up to a radiation intensity of  $3 \cdot 10^2$  Gy.

### Resistance to weathering

iglidur® G1 plain bearings have not yet been tested for their resistance to weathering. Please consult igus® if you're planning to use them outdoors.

### Mechanical properties

With increasing temperatures, the compressive strength of iglidur® G1 plain bearings decreases. Diagram 02 shows this inverse relationship. With the long-term permitted application temperature of +180°C, the permitted surface pressure still amounts to 40MPa. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this.

Diagram 03 shows the elastic deformation of iglidur® G1 at radial loads. The plastic deformation is minimal up to a pressure of approximately 100MPa. However, it is also dependent on the service time.

**Surface pressure, page 45**



-40°C up to  
+180°C



91MPa



HB



RoHS



ISO  
35474

## Permissible surface speeds

iglidur® G1 has been developed for low to medium surface speeds. The maximum values shown in table 03 can only be achieved at low pressures. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, though, this level is rarely reached due to varying application conditions.

**Surface speed, page 48**

## Temperature

The ambient temperatures strongly influence the properties of plain bearings. The temperatures prevailing in the bearing system also have an influence on the wear. With increasing temperatures, the wear increases and this effect is significant when temperatures rise over +120°C. For temperatures over 120°C an additional securing of the bearings in the housing is required.

**Application temperatures, page 53**

**Additional securing, page 53**

## Friction and wear

The coefficient of friction  $\mu$  of a plain bearing among other factors is influenced by the surface speed and the load (diagrams 04 and 05).

**Coefficient of friction and surfaces, page 51**

**Wear resistance, page 54**

## Shaft materials

The friction and wear are also dependent, to a large degree, on the mating partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglidur® G1 a ground surface with an average surface finish  $R_a = 0.8\mu\text{m}$  is recommended. Diagram 06 shows results of testing different shaft materials with plain bearings made from iglidur® G1. It can be observed that iglidur® G1 achieves good to very good wear results with all shaft materials. The results for stainless steel types are most likely slightly lower. Diagram 07 compares the wear in rotating and pivoting applications. As with many of the iglidur® materials, wear rate is better in pivoting applications.

**Shaft materials, page 56**

## Installation tolerances

iglidur® G1 plain bearings are standard bearings for shafts with h-tolerance (recommended minimum h9). The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, in standard cases the inner diameter automatically adjusts to the F10 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table).

**Testing methods, page 61**

Chemicals	Resistance
Alcohols	+ up to 0
Diluted acids	0 up to -
Diluted alkalines	+
Fuels	+
Greases, oils without additives	+
Hydrocarbons	+
Strong acids	-
Strong alkalines	0

All data given at room temperature [+20°C]

**Table 02: Chemical resistance**

**Chemical table, page 1170**

	Rotating	Oscillating	linear
Long-term m/s	1.3	1.0	5.0
Short-term m/s	2.5	1.8	6.0

**Table 03: Maximum surface speeds**

	Dry	Greases	Oil	Water
Coefficient of friction $\mu$	0.10-0.29	0.09	0.04	0.04

**Table 04: Coefficient of friction against steel ( $R_a = 1\mu\text{m}$ , 50HRC)**

Ø d1 [mm]	Housing		Plain bearings		Shaft	
	H7 [mm]	F10 [mm]	F10 [mm]	h9 [mm]		
0-3	+0.000	+0.010	+0.006	+0.046	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.010	+0.058	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.013	+0.071	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.016	+0.086	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.020	+0.104	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.025	+0.125	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.030	+0.150	-0.074	+0.000
> 80-120	+0.000	+0.035	-0.036	+0.176	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.043	+0.203	+0.000	+0.100

**Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit**

## Technical data

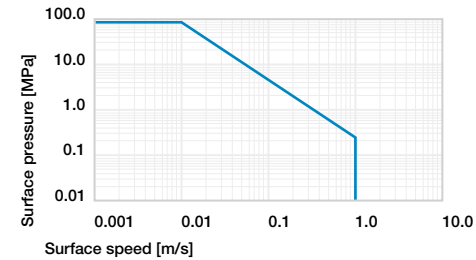


Diagram 01: Permissible pv values for iglidur® G plain bearing with a wall thickness of 1 mm dry operation against a steel shaft at +20°C, mounted in a steel housing.

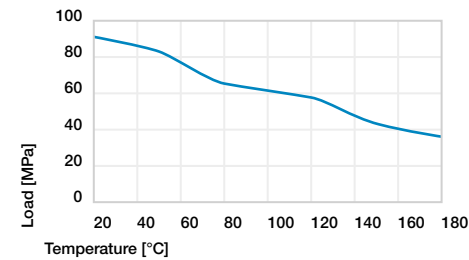


Diagram 02: Maximum recommended surface pressure as a function of temperature (91MPa at +20°C)

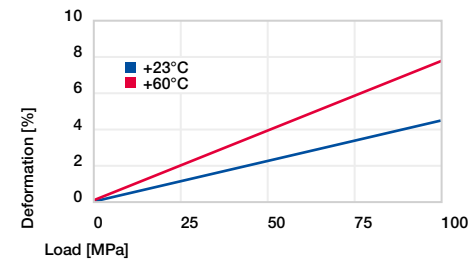


Diagram 03: Deformation under pressure and temperature

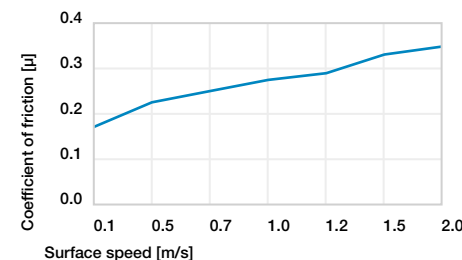


Diagram 04: Coefficient of friction as a function of the surface speed, p = 1 MPa

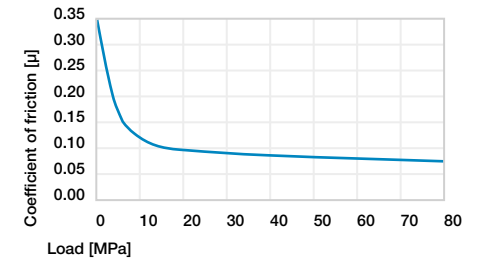


Diagram 05: Coefficient of friction as a function of the pressure, v = 0.01 m/s

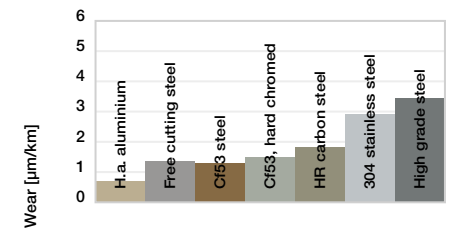


Diagram 06: Wear, rotating with different shaft materials, pressure, p = 1 MPa, v = 0.3 m/s


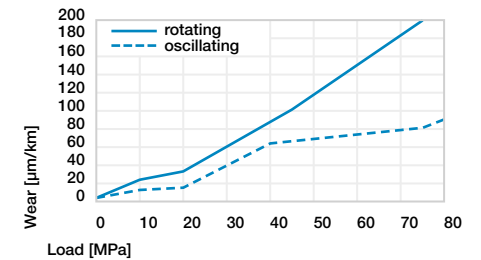


Diagram 07: Wear for oscillating and rotating applications with shaft material Cf53 hardened and ground steel, as a function of the load

## Sleeve bearings (form S)



<sup>3)</sup> Thickness < 0.6mm: chamfer = 20°

Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1/f3 [mm]	0.3	0.5	0.8	1.2



Dimensions according to ISO 3547-1 and special dimensions



Order example: **G1SM-0405-04** – no minimum order quantity.

**G1** iglidur® material **S** Cylindrical **M** Metric **04** Inner Ø d1 **05** Outer Ø d2 **04** Total length b1

d1	d1	d2	b1	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	h13 [mm]	
4.0		5.5	4.0	<b>G1SM-0405-04</b>
4.0		5.5	6.0	<b>G1SM-0405-06</b>
5.0	+0.010	7.0	5.0	<b>G1SM-0507-05</b>
5.0		7.0	10.0	<b>G1SM-0507-10</b>
6.0	+0.058	8.0	6.0	<b>G1SM-0608-06</b>
6.0		8.0	8.0	<b>G1SM-0608-08</b>
6.0		8.0	10.0	<b>G1SM-0608-10</b>
8.0		10.0	8.0	<b>G1SM-0810-08</b>
8.0		10.0	10.0	<b>G1SM-0810-10</b>
8.0		10.0	12.0	<b>G1SM-0810-12</b>
10.0	+0.013	12.0	8.0	<b>G1SM-1012-08</b>
10.0	+0.071	12.0	10.0	<b>G1SM-1012-10</b>
10.0		12.0	12.0	<b>G1SM-1012-12</b>
10.0		12.0	15.0	<b>G1SM-1012-15</b>
10.0		12.0	20.0	<b>G1SM-1012-20</b>
12.0		14.0	10.0	<b>G1SM-1214-10</b>
12.0		14.0	12.0	<b>G1SM-1214-12</b>
12.0		14.0	15.0	<b>G1SM-1214-15</b>
12.0		14.0	20.0	<b>G1SM-1214-20</b>
13.0		15.0	10.0	<b>G1SM-1315-10</b>
13.0		15.0	20.0	<b>G1SM-1315-20</b>
14.0	+0.016	16.0	15.0	<b>G1SM-1416-15</b>
14.0	+0.086	16.0	20.0	<b>G1SM-1416-20</b>
14.0		16.0	25.0	<b>G1SM-1416-25</b>
15.0		17.0	15.0	<b>G1SM-1517-15</b>
15.0		17.0	20.0	<b>G1SM-1517-20</b>
15.0		17.0	25.0	<b>G1SM-1517-25</b>
16.0		18.0	15.0	<b>G1SM-1618-15</b>
16.0		18.0	20.0	<b>G1SM-1618-20</b>

d1	d1	d2	b1	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	h13 [mm]	
16.0		18.0	25.0	<b>G1SM-1618-25</b>
18.0	+0.016	20.0	15.0	<b>G1SM-1820-15</b>
18.0	+0.086	20.0	20.0	<b>G1SM-1820-20</b>
18.0		20.0	25.0	<b>G1SM-1820-25</b>
20.0		23.0	10.0	<b>G1SM-2023-10</b>
20.0		23.0	15.0	<b>G1SM-2023-15</b>
20.0		23.0	20.0	<b>G1SM-2023-20</b>
20.0		23.0	25.0	<b>G1SM-2023-25</b>
20.0		23.0	30.0	<b>G1SM-2023-30</b>
22.0		25.0	15.0	<b>G1SM-2225-15</b>
22.0		25.0	20.0	<b>G1SM-2225-20</b>
22.0		25.0	25.0	<b>G1SM-2225-25</b>
22.0		25.0	30.0	<b>G1SM-2225-30</b>
24.0		27.0	15.0	<b>G1SM-2427-15</b>
24.0		27.0	20.0	<b>G1SM-2427-20</b>
24.0	+0.020	27.0	25.0	<b>G1SM-2427-25</b>
24.0		27.0	30.0	<b>G1SM-2427-30</b>
24.0	+0.104	27.0	15.0	<b>G1SM-2528-15</b>
25.0		28.0	15.0	<b>G1SM-2528-15</b>
25.0		28.0	20.0	<b>G1SM-2528-20</b>
25.0		28.0	25.0	<b>G1SM-2528-25</b>
25.0		28.0	30.0	<b>G1SM-2528-30</b>
28.0		32.0	20.0	<b>G1SM-2832-20</b>
28.0		32.0	25.0	<b>G1SM-2832-25</b>
28.0		32.0	25.0	<b>G1SM-2832-30</b>
30.0		34.0	20.0	<b>G1SM-3034-20</b>
30.0		34.0	25.0	<b>G1SM-3034-25</b>
30.0		34.0	30.0	<b>G1SM-3034-30</b>
30.0		34.0	40.0	<b>G1SM-3034-40</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*

## Product range

d1	d1	d2	b1	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	h13 [mm]	
32.0		36.0	20.0	<b>G1SM-3236-20</b>
32.0		36.0	30.0	<b>G1SM-3236-30</b>
32.0		36.0	40.0	<b>G1SM-3236-40</b>
35.0		39.0	20.0	<b>G1SM-3539-20</b>
35.0	+0.025	39.0	30.0	<b>G1SM-3539-30</b>
35.0	+0.125	39.0	40.0	<b>G1SM-3539-40</b>
35.0		39.0	50.0	<b>G1SM-3539-50</b>
40.0		44.0	20.0	<b>G1SM-4044-20</b>
40.0		44.0	30.0	<b>G1SM-4044-30</b>
40.0		44.0	40.0	<b>G1SM-4044-40</b>

d1	d1	d2	b1	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	h13 [mm]	
40.0		44.0	50.0	<b>G1SM-4044-50</b>
45.0		50.0	20.0	<b>G1SM-4550-20</b>
45.0		50.0	30.0	<b>G1SM-4550-30</b>
45.0		50.0	40.0	<b>G1SM-4550-40</b>
45.0	+0.025	50.0	50.0	<b>G1SM-4550-50</b>
50.0		+0.125	55.0	20.0
50.0	55.0		30.0	<b>G1SM-5055-30</b>
50.0		55.0	40.0	<b>G1SM-5055-40</b>
50.0		55.0	50.0	<b>G1SM-5055-50</b>
50.0		55.0	60.0	<b>G1SM-5055-60</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*



Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



Order online

including delivery times, prices, online tools

[www.igus.eu/G1](http://www.igus.eu/G1)



Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

Discount scaling


1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.

No low-quantity surcharges.

Free shipping within Germany for orders above €150.

## Flange bearings (form F)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

### Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2



Dimensions according to ISO 3547-1 and special dimensions

**Order example:** **G1FM-0608-04** – no minimum order quantity.

**G1** iglidur® material **F** With flange **M** Metric **06** Inner Ø d1 **08** Outer Ø d2 **04** Total length b1

d1	d1 Tolerance <sup>3)</sup>	d2	d3 <sup>3)</sup>	b1	b2	Part No.
[mm]		[mm]	[mm]	[mm]	[mm]	
6.0	+0.010 +0.058	8.0	12.0	4.0	1.00	<b>G1FM-0608-04</b>
6.0		8.0	12.0	8.0	1.00	<b>G1FM-0608-08</b>
8.0	+0.013 +0.071	10.0	15.0	5.5	1.00	<b>G1FM-0810-05</b>
8.0		10.0	15.0	7.5	1.00	<b>G1FM-0810-07</b>
8.0		10.0	15.0	9.5	1.00	<b>G1FM-0810-09</b>
10.0		12.0	18.0	7.0	1.00	<b>G1FM-1012-07</b>
10.0		12.0	18.0	9.0	1.00	<b>G1FM-1012-09</b>
10.0		12.0	18.0	12.0	1.00	<b>G1FM-1012-12</b>
10.0	+0.016 +0.086	12.0	18.0	17.0	1.00	<b>G1FM-1012-17</b>
12.0		14.0	20.0	7.0	1.00	<b>G1FM-1214-07</b>
12.0		14.0	20.0	9.0	1.00	<b>G1FM-1214-09</b>
12.0		14.0	20.0	12.0	1.00	<b>G1FM-1214-12</b>
12.0		14.0	20.0	17.0	1.00	<b>G1FM-1214-17</b>
14.0		16.0	22.0	12.0	1.00	<b>G1FM-1416-12</b>
14.0		16.0	22.0	17.0	1.00	<b>G1FM-1416-17</b>
15.0		17.0	23.0	9.0	1.00	<b>G1FM-1517-09</b>
15.0		17.0	23.0	12.0	1.00	<b>G1FM-1517-12</b>
15.0		17.0	23.0	17.0	1.00	<b>G1FM-1517-17</b>
16.0	+0.020 +0.104	18.0	24.0	12.0	1.00	<b>G1FM-1618-12</b>
16.0		18.0	24.0	17.0	1.00	<b>G1FM-1618-17</b>
18.0		20.0	26.0	12.0	1.00	<b>G1FM-1820-12</b>
18.0		20.0	26.0	17.0	1.00	<b>G1FM-1820-17</b>
18.0		20.0	26.0	22.0	1.00	<b>G1FM-1820-22</b>
20.0		23.0	30.0	11.5	1.50	<b>G1FM-2023-11</b>
20.0		23.0	30.0	16.5	1.50	<b>G1FM-2023-16</b>
20.0		23.0	30.0	21.5	1.50	<b>G1FM-2023-21</b>
25.0		28.0	35.0	11.5	1.50	<b>G1FM-2528-11</b>
25.0		28.0	35.0	16.5	1.50	<b>G1FM-2528-16</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*

## Product range

d1	d1 Tolerance <sup>3)</sup>	d2	d3 <sup>3)</sup>	b1	b2	Part No.
[mm]		[mm]	[mm]	[mm]	[mm]	
25.0	+0.020 +0.104	28.0	35.0	21.5	1.50	<b>G1FM-2528-21</b>
30.0		34.0	42.0	16.0	2.00	<b>G1FM-3034-16</b>
30.0		34.0	42.0	26.0	2.00	<b>G1FM-3034-26</b>
35.0	+0.025 +0.125	39.0	47.0	16.0	2.00	<b>G1FM-3539-16</b>
35.0		39.0	47.0	26.0	2.00	<b>G1FM-3539-26</b>
40.0		44.0	52.0	30.0	2.00	<b>G1FM-4044-30</b>
40.0		44.0	52.0	40.0	2.00	<b>G1FM-4044-40</b>
45.0		50.0	58.0	50.0	2.00	<b>G1FM-4550-50</b>



### Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



### Order online

including delivery times, prices, online tools

[www.igus.eu/G1](http://www.igus.eu/G1)



### Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

### Discount scaling

1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.

No low-quantity surcharges.

Free shipping within Germany for orders above €150.



## The robust all-rounder according to ISO 2795

Excellent vibration dampening

### igidur® M250



#### When to use it?

- When the bearings are exposed to large amounts of dirt
- When high vibration dampening is necessary
- For low to medium speeds
- When mechanical reaming of the bore is necessary



#### When not to use it?

- For applications in wet areas  
*igidur® H*
- When very high precision is necessary  
*igidur® P*
- For very smooth shafts  
*igidur® J*
- When a cost-effective wear-resistant plain bearing is required  
*igidur® R*



# Bearing technology | Plain bearings | iglidur® M250



Ø  
1.0-75.0mm

Also available  
as:



Bar stock,  
round bar  
Page 743



Bar stock,  
plate  
Page 773



tribo-tape liner  
Page 781



Guide rings  
Page 641



Two hole  
flange  
bearings  
Page 667



Moulded  
special parts  
Page 696



igubal®  
spherical balls  
Page 993



## The robust all-rounder according to ISO 2795 Excellent vibration dampening

The self-lubricating plain bearings made of iglidur® M250 are characterised by impact strength, vibration dampening and wear resistance. They prove themselves particularly well under stresses in which the vibration dampening of the bearings is required, e. g. in sports equipment and packaging machines.

- Over 450 sizes available from stock
- Excellent vibration dampening
- Suitable for high edge pressures
- Suitable for impact loads
- Thick-walled according to ISO 2795
- Dirt can become embedded for shaft protection
- Lubrication-free
- Maintenance-free
- Thrust washers available only in imperial sizes, from page 1147

### Typical application areas

- Agricultural machines
- Furniture/Industrial design
- Textile industry
- Doors and gates
- Mechanical engineering

Descriptive technical specifications				
Wear resistance at +23°C	-	<div style="width: 25%; background-color: #0070C0;"></div>		+
Wear resistance at +90°C	-	<div style="width: 35%; background-color: #0070C0;"></div>		+
Wear resistance at +150°C	-	<div style="width: 15%; background-color: #0070C0;"></div>		+
Slide property	-	<div style="width: 30%; background-color: #0070C0;"></div>		+
Wear resistance under water	-	<div style="width: 15%; background-color: #0070C0;"></div>		+
Media resistance	-	<div style="width: 45%; background-color: #0070C0;"></div>		+
Resistant to edge pressures	-	<div style="width: 85%; background-color: #0070C0;"></div>		+
Resistant to shock and impact loads	-	<div style="width: 95%; background-color: #0070C0;"></div>		+
Dirt resistance	-	<div style="width: 85%; background-color: #0070C0;"></div>		+

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)

EN 09/2023

EN 09/2023

## Technical data

General properties		Testing method	
Density	g/cm <sup>3</sup>	1.14	
Colour		dark grey	
Max. moisture absorption at +23°C/50% r.h.	% weight	1.4	DIN 53495
Max. moisture absorption	% weight	7.6	
Coefficient of friction, dynamic, against steel	μ	0.18-0.40	
pv value, max. (dry)	MPa · m/s	0.12	
Mechanical properties			
Flexural modulus	MPa	2,700	DIN 53457
Flexural strength at +20°C	MPa	112	DIN 53452
Compressive strength	MPa	52	
Max. permissible surface pressure (+20°C)	MPa	20	
Shore D hardness		79	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+80	
Max. application temperature short-term	°C	+170	
Min. application temperature	°C	-40	
Thermal conductivity	W/m · K	0.24	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	10	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	> 10 <sup>13</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>11</sup>	DIN 53482

Table 01: Material properties

The self-lubricating plain bearings made of iglidur® M250 are characterised by impact strength, vibration dampening and wear resistance. They prove themselves particularly well under stresses in which the vibration dampening of the bearings is required, e.g. in sports equipment and packaging machines. Since they are additionally able to absorb dirt, they are also suited for agricultural machines and garden appliances.

### Moisture absorption

The moisture absorption of iglidur® M250 plain bearings in ambient conditions is approximately 1.4% weight. The saturation limit submerged in water is 7.6% weight. This must be taken into account for these types of applications.

### Vacuum

In vacuum, any present moisture is released as vapour. The use in vacuum is only possible to a limited extent.

### Radiation resistance

Plain bearings made from iglidur® M250 have limited use under radioactive radiation. They are resistant up to a radiation intensity of 1 · 10<sup>4</sup> Gy.

### Resistance to weathering

iglidur® M250 plain bearings are not resistant to weathering. The material properties are significantly affected. Discolouration occurs. Practical tests under real application conditions are strongly recommended.

### Mechanical properties

When temperatures increase, the compressive strength of iglidur® M250 plain bearings decreases. Diagram 02 shows this inverse relationship. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this.

iglidur® M250 plain bearings can withstand a maximum recommended surface pressure of 20MPa. Compared with other iglidur® materials iglidur® M250 plain bearings are highly elastic. By this elasticity they can yield very well, but retain their original shape again. A plastic deformation is minimal up to the maximum recommended surface pressure.

**Surface pressure, page 45**



-40 °C up to  
+80 °C



210MPa



## Permissible surface speeds

As standard, iglidur® M250 is manufactured as a thick-walled bearing. iglidur® M250 is best suited for low to medium surface speeds. The maximum permissible surface speed for dry-operating applications is 0.8m/s (rotating) and 2.5 m/s (linear). In practice, though, this level is rarely reached due to varying application conditions.

**Surface speed, page 48**

## Temperature

Application temperatures up to +170°C are permissible for short periods. However, it is permissible to expose iglidur® M250 plain bearings to this temperature only if they are not subjected to any further load. The maximum long-term application temperature is +80°C. This is also the point of the wear limit, i.e. the temperature over which the wear increases exponentially. For temperatures over +60°C an additional securing is required.

**Application temperatures, page 53**

**Additional securing, page 53**

## Friction and wear

The coefficient of friction  $\mu$  of a plain bearing among other factors is influenced by the surface speed and the load (diagrams 04 and 05).

**Coefficient of friction and surfaces, page 51**

**Wear resistance, page 54**

## Shaft materials

The friction and wear are also dependent, to a large degree, on the mating partner. If you observe the coefficient of friction, then the ideal shaft surface finish for iglidur® M250 bearings is Ra = 0.6mm. Diagram 06 and 07 display a summary of the results of tests with different shaft materials executed with plain bearings made of iglidur® M250. Up to loads of 2MPa the shaft material plays a relatively small role for rotational movements. Therefore, a suitable shaft material must be considered for higher loads. These are hardened shafts, such as Cf53 or hard-chromed. Diagram 07 shows that iglidur® M250 is much better suited for rotational motion than for pivoting movements. However, it must be mentioned that pivoting movements often cause high vibrations, which act on the bearing. This is where iglidur® M250 can show off its special dampening specifications. In our test, these vibrations are excluded for clarity so that the comparison between rotation and pivoting operation is accurate.

**Shaft materials, page 56**

## Installation tolerances

iglidur® M250 plain bearings require a relatively large amount of bearing clearance for optimal operation. This ensures that the bearing remains reliable during temperature change and water absorption. The disadvantages of the bearings clearance are minimised by the vibration-dampening properties. The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, the inner diameter automatically adjusts to the D11 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table). The shaft should have a recommended minimum h9 tolerance.

**Testing methods, page 61**

Chemicals	Resistance
Alcohols	+ up to 0
Diluted acids	0 up to -
Diluted alkalines	+
Fuels	+
Greases, oils without additives	+
Hydrocarbons	+
Strong acids	-
Strong alkalines	0

All data given at room temperature [+20°C]

Table 02: Chemical resistance

**Chemical table, page 1170**

	Rotating	Oscillating	linear
Long-term m/s	0.8	0.6	2.5
Short-term m/s	2.0	1.4	5.0

Table 03: Maximum surface speeds

	Dry	Greases	Oil	Water
Coefficient of friction $\mu$	0.18-0.40	0.09	0.04	0.04

Table 04: Coefficient of friction against steel (Ra = 1  $\mu$ m, 50HRC)

$\varnothing$ d1 [mm]	Housing		Plain bearings		Shaft	
	H7 [mm]	D11 [mm]	D11 [mm]	h9 [mm]	h9 [mm]	h9 [mm]
0-3	+0.000	+0.010	+0.020	+0.080	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.030	+0.105	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.040	+0.130	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.050	+0.160	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.065	+0.195	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.080	+0.240	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.100	+0.290	-0.074	+0.000
> 80-120	+0.000	+0.035	+0.120	+0.340	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.145	+0.395	-0.100	+0.000

Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit

## Technical data

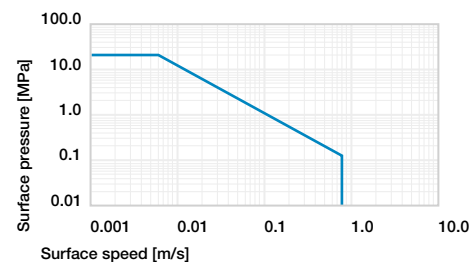


Diagram 01: Permissible pv values for iglidur® M250 with a wall thickness of 1mm dry operation against a steel shaft at +20°C, mounted in a steel housing

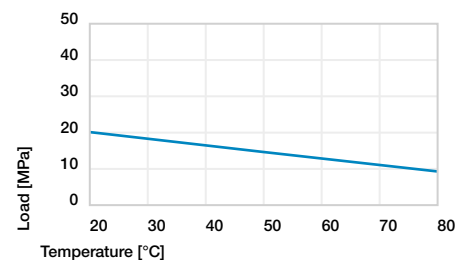


Diagram 02: Maximum recommended surface pressure as a function of temperature (20MPa at +20°C)

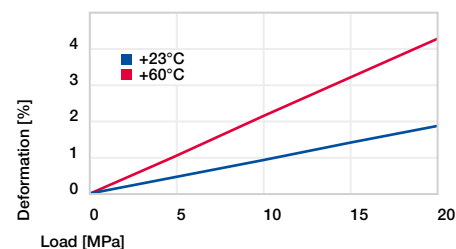


Diagram 03: Deformation under pressure and temperature

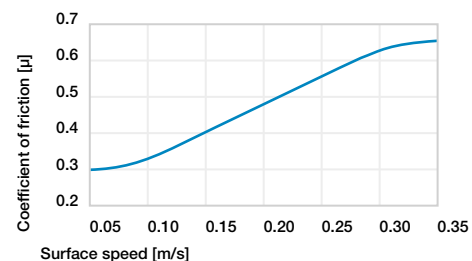


Diagram 04: Coefficient of friction as a function of the surface speed, p = 0.75MPa

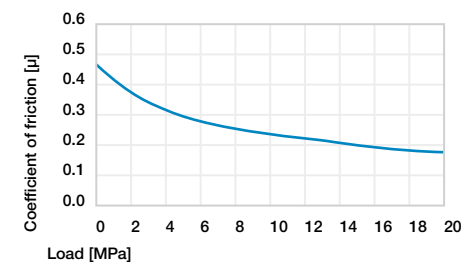


Diagram 05: Coefficient of friction as a function of the pressure, v = 0.01m/s

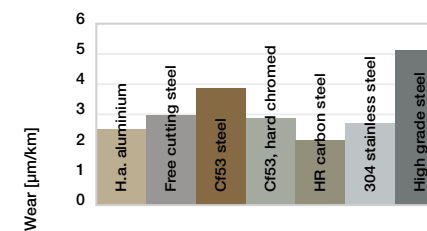


Diagram 06: Wear, rotating with different shaft materials, pressure, p = 1MPa, v = 0.3m/s


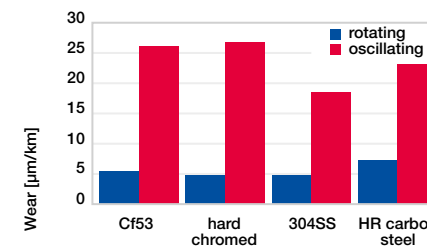


Diagram 07: Wear for rotating and oscillating applications with different shaft materials, p = 2MPa

# Bearing technology | Plain bearings | iglidur® M250

## Sleeve bearings (form S)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

### Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2

**i** Dimensions according to ISO 2795 and special dimensions



Order example: **MSM-0103-02** – no minimum order quantity.

**M250** iglidur® material **S** Cylindrical **M** Metric **01** Inner Ø d1 **03** Outer Ø d2 **02** Total length b1

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.	d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]		[mm]		[mm]	[mm]	
1.0		3.0	2.0	MSM-0103-02	6.0		10.0	4.0	MSM-0610-04
1.5		4.0	2.0	MSM-0104-02	6.0		10.0	6.0	MSM-0610-06
2.0		5.0	1.0	MSM-0205-01	6.0	+0.030	10.0	8.0	MSM-0610-08
2.0	+0.020	5.0	2.0	MSM-0205-02	6.0	+0.105	10.0	10.0	MSM-0610-10
2.0	+0.080	5.0	3.0	MSM-0205-03	6.0		11.0	4.0	MSM-0611-04
2.5		6.0	3.0	MSM-0206-03	6.0		12.0	6.0	MSM-0612-06
3.0		5.0	3.0	MSM-0305-03	6.0		12.0	10.0	MSM-0612-10
3.0		5.0	4.0	MSM-0305-04	7.0		10.0	5.0	MSM-0710-05
3.0		6.0	3.0	MSM-0306-03	7.0		10.0	8.0	MSM-0710-08
3.0		6.0	4.0	MSM-0306-04	7.0		10.0	10.0	MSM-0710-10
4.0		5.5	4.0	MSM-0405-04	7.0		11.0	16.0	MSM-0711-16
4.0		5.5	6.0	MSM-0405-06	8.0		10.0	6.0	MSM-0810-06
4.0		7.0	3.0	MSM-0407-03	8.0		10.0	8.0	MSM-0810-08
4.0		7.0	4.0	MSM-0407-04	8.0		10.0	10.0	MSM-0810-10
4.0		7.0	6.0	MSM-0407-06	8.0		10.0	12.0	MSM-0810-12
4.0		8.0	4.0	MSM-0408-04	8.0		11.0	6.0	MSM-0811-06
4.0		8.0	6.0	MSM-0408-06	8.0		11.0	8.0	MSM-0811-08
5.0		7.0	5.0	MSM-0507-05	8.0	+0.040	11.0	12.0	MSM-0811-12
5.0	+0.030	7.0	10.0	MSM-0507-10	8.0	+0.130	12.0	4.0	MSM-0812-04
5.0	+0.105	8.0	4.0	MSM-0508-04	8.0		12.0	6.0	MSM-0812-06
5.0		8.0	5.0	MSM-0508-05	8.0		12.0	8.0	MSM-0812-08
5.0		8.0	8.0	MSM-0508-08	8.0		12.0	10.0	MSM-0812-10
5.0		9.0	5.0	MSM-0509-05	8.0		12.0	12.0	MSM-0812-12
5.0		9.0	8.0	MSM-0509-08	8.0		14.0	6.0	MSM-0814-06
6.0		8.0	6.0	MSM-0608-06	8.0		14.0	10.0	MSM-0814-10
6.0		8.0	8.0	MSM-0608-08	9.0		12.0	14.0	MSM-0912-14
6.0		8.0	10.0	MSM-0608-10	10.0		12.0	8.0	MSM-1012-08
6.0		9.0	6.0	MSM-0609-06	10.0		12.0	10.0	MSM-1012-10
6.0		10.0	2.5	MSM-0610-02	10.0		12.0	12.0	MSM-1012-12

<sup>3)</sup> After press-fit. Testing methods, page 61

EN 09/2023



## Product range

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.	d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]		[mm]		[mm]	[mm]	
10.0		12.0	15.0	MSM-1012-15	16.0		21.0	7.0	MSM-1621-07
10.0		12.0	20.0	MSM-1012-20	16.0		22.0	12.0	MSM-1622-12
10.0		14.0	6.0	MSM-1014-06	16.0		22.0	15.0	MSM-1622-15
10.0		14.0	8.0	MSM-1014-08	16.0		22.0	16.0	MSM-1622-16
10.0		14.0	10.0	MSM-1014-10	16.0		22.0	20.0	MSM-1622-20
10.0	+0.040	14.0	16.0	MSM-1014-16	16.0	+0.050	22.0	25.0	MSM-1622-25
10.0	+0.130	16.0	6.0	MSM-1016-06	18.0	+0.160	20.0	15.0	MSM-1820-15
10.0		16.0	8.0	MSM-1016-08	18.0		20.0	20.0	MSM-1820-20
10.0		16.0	10.0	MSM-1016-10	18.0		20.0	25.0	MSM-1820-25
10.0		16.0	16.0	MSM-1016-16	18.0		24.0	12.0	MSM-1824-12
10.0		16.0	50.0	MSM-1016-50	18.0		24.0	20.0	MSM-1824-20
12.0		14.0	10.0	MSM-1214-10	18.0		24.0	30.0	MSM-1824-30
12.0		14.0	12.0	MSM-1214-12	18.0		24.0	40.0	MSM-1824-40
12.0		14.0	15.0	MSM-1214-15	20.0		23.0	10.0	MSM-2023-10
12.0		14.0	20.0	MSM-1214-20	20.0		23.0	15.0	MSM-2023-15
12.0		16.0	15.0	MSM-1216-15	20.0		23.0	20.0	MSM-2023-20
12.0		16.0	20.0	MSM-1216-20	20.0		23.0	25.0	MSM-2023-25
12.0		18.0	8.0	MSM-1218-08	20.0		23.0	30.0	MSM-2023-30
12.0		18.0	10.0	MSM-1218-10	20.0		25.0	14.0	MSM-2025-14
12.0		18.0	15.0	MSM-1218-15	20.0		25.0	20.0	MSM-2025-20
12.0		18.0	20.0	MSM-1218-20	20.0		25.0	30.0	MSM-2025-30
13.0		15.0	10.0	MSM-1315-10	20.0		26.0	12.0	MSM-2026-12
13.0		15.0	20.0	MSM-1315-20	20.0		26.0	15.0	MSM-2026-15
14.0		16.0	8.5	MSM-1416-085	20.0		26.0	20.0	MSM-2026-20
14.0		16.0	10.0	MSM-1416-10	20.0		26.0	30.0	MSM-2026-30
14.0		16.0	15.0	MSM-1416-15	22.0		24.0	8.0	MSM-2224-08
14.0		16.0	20.0	MSM-1416-20	22.0		25.0	15.0	MSM-2225-15
14.0		16.0	25.0	MSM-1416-25	22.0		25.0	20.0	MSM-2225-20
14.0		16.0	29.0	MSM-1416-29	22.0		25.0	25.0	MSM-2225-25
14.0	+0.050	18.0	20.0	MSM-1418-20	22.0	+0.065	25.0	30.0	MSM-2225-30
14.0	+0.160	20.0	10.0	MSM-1420-10	22.0	+0.195	26.0	15.0	MSM-2226-15
14.0		20.0	15.0	MSM-1420-15	22.0		28.0	10.0	MSM-2228-10
14.0		20.0	20.0	MSM-1420-20	22.0		28.0	15.0	MSM-2228-15
15.0		17.0	10.0	MSM-1517-10	22.0		28.0	20.0	MSM-2228-20
15.0		17.0	15.0	MSM-1517-15	22.0		28.0	30.0	MSM-2228-30
15.0		17.0	20.0	MSM-1517-20	24.0		27.0	15.0	MSM-2427-15
15.0		17.0	25.0	MSM-1517-25	24.0		27.0	20.0	MSM-2427-20
15.0		21.0	10.0	MSM-1521-10	24.0		27.0	25.0	MSM-2427-25
15.0		21.0	15.0	MSM-1521-15	24.0		27.0	30.0	MSM-2427-30
15.0		21.0	20.0	MSM-1521-20	24.0		30.0	15.0	MSM-2430-15
15.0		21.0	23.0	MSM-1521-23	24.0		30.0	20.0	MSM-2430-20
16.0		18.0	12.0	MSM-1618-12	24.0		30.0	30.0	MSM-2430-30
16.0		18.0	15.0	MSM-1618-15	25.0		28.0	12.0	MSM-2528-12
16.0		18.0	20.0	MSM-1618-20	25.0		28.0	15.0	MSM-2528-15
16.0		18.0	25.0	MSM-1618-25	25.0		28.0	20.0	MSM-2528-20
16.0		20.0	20.0	MSM-1620-20	25.0		28.0	25.0	MSM-2528-25
16.0		20.0	25.0	MSM-1620-25	25.0		28.0	30.0	MSM-2528-30
16.0		20.0	30.0	MSM-1620-30	25.0		30.0	20.0	MSM-2530-20

<sup>3)</sup> After press-fit. Testing methods, page 61

EN 09/2023



## Bearing technology | Plain bearings | iglidur® M250

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.	d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	
25.0		30.0	30.0	MSM-2530-30	30.0		38.0	20.0	MSM-3038-20
25.0		30.0	40.0	MSM-2530-40	30.0	+0.065	38.0	30.0	MSM-3038-30
25.0		32.0	10.0	MSM-2532-10	30.0	+0.195	38.0	40.0	MSM-3038-40
25.0		32.0	12.0	MSM-2532-12	30.0		40.0	40.0	MSM-3040-40
25.0		32.0	20.0	MSM-2532-20	32.0		36.0	20.0	MSM-3236-20
25.0		32.0	30.0	MSM-2532-30	32.0		36.0	30.0	MSM-3236-30
25.0		32.0	35.0	MSM-2532-35	32.0		36.0	40.0	MSM-3236-40
25.0		32.0	40.0	MSM-2532-40	32.0		40.0	20.0	MSM-3240-20
26.0		30.0	20.0	MSM-2630-20	32.0		40.0	30.0	MSM-3240-30
26.0		32.0	30.0	MSM-2632-30	32.0		40.0	40.0	MSM-3240-40
27.0		34.0	20.0	MSM-2734-20	35.0		39.0	20.0	MSM-3539-20
27.0		34.0	30.0	MSM-2734-30	35.0		39.0	30.0	MSM-3539-30
27.0	+0.065	34.0	40.0	MSM-2734-40	35.0		39.0	40.0	MSM-3539-40
28.0	+0.195	32.0	20.0	MSM-2832-20	35.0		39.0	50.0	MSM-3539-50
28.0		32.0	25.0	MSM-2832-25	35.0		42.0	50.0	MSM-3542-50
28.0		32.0	30.0	MSM-2832-30	40.0		44.0	20.0	MSM-4044-20
28.0		33.0	20.0	MSM-2833-20	40.0	+0.080	44.0	30.0	MSM-4044-30
28.0		36.0	20.0	MSM-2836-20	40.0	+0.240	44.0	40.0	MSM-4044-40
28.0		36.0	30.0	MSM-2836-30	40.0		44.0	50.0	MSM-4044-50
28.0		36.0	40.0	MSM-2836-40	40.0		46.0	20.0	MSM-4046-20
30.0		34.0	20.0	MSM-3034-20	45.0		50.0	20.0	MSM-4550-20
30.0		34.0	25.0	MSM-3034-25	45.0		50.0	30.0	MSM-4550-30
30.0		34.0	30.0	MSM-3034-30	45.0		50.0	40.0	MSM-4550-40
30.0		34.0	40.0	MSM-3034-40	45.0		50.0	50.0	MSM-4550-50
30.0		35.0	20.0	MSM-3035-20	50.0		55.0	20.0	MSM-5055-20
30.0		35.0	40.0	MSM-3035-40	50.0		55.0	30.0	MSM-5055-30
30.0	+0.032				50.0		55.0	40.0	MSM-5055-40
30.0	+0.102	38.0	3.0	MSM-3038-03	50.0		55.0	50.0	MSM-5055-50
30.0	+0.065				50.0		55.0	60.0	MSM-5055-60
30.0	+0.195	38.0	4.5	MSM-3038-045					
30.0	+0.080				75.0	+0.100	80.0	60.0	MSM-7580-60
30.0	+0.240	38.0	17.0	MSM-3038-17		+0.290			

<sup>3)</sup> After press-fit. *Testing methods, page 61*



**Available from stock**

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



**Order online**

Including delivery times, prices, online tools

[www.igus.eu/M250](http://www.igus.eu/M250)



**Ordering note**

Our prices are scaled according to order quantities, current prices can be found online.

**Discount scaling**

1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.


No low-quantity surcharges.

Free shipping within Germany for orders above €150.

EN 09/2023

## Bearing technology | Plain bearings | iglidur® M250

Flange bearings (form F)



<sup>3)</sup> Thickness < 0.6mm: chamfer = 20°

Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2

**i** Dimensions according to ISO 2795 and special dimensions



**Order example:** MFM-0103-02 – no minimum order quantity.

M250 iglidur® material F With flange M Metric 01 Inner Ø d1 03 Outer Ø d2 02 Total length b1

d1	d1 Tolerance <sup>3)</sup>	d2	d3	b1 h13	b2 h13	Part No.
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
1.0		3.0	5.0	2.0	1.00	MFM-0103-02
1.5		4.0	6.0	2.0	1.00	MFM-0104-02
2.0	+0.020	5.0	8.0	3.0	1.50	MFM-0205-03
2.5	+0.080	6.0	9.0	3.0	1.50	MFM-0206-03
3.0		6.0	9.0	4.0	1.50	MFM-0306-04
4.0		8.0	12.0	4.0	2.00	MFM-0408-04
4.0		8.0	12.0	6.0	2.00	MFM-0408-06
4.0		8.0	12.0	8.0	2.00	MFM-0408-08
5.0		9.0	13.0	5.0	2.00	MFM-0509-05
5.0		9.0	13.0	6.0	2.00	MFM-0509-06
5.0		9.0	13.0	8.0	2.00	MFM-0509-08
6.0	+0.030	8.0	12.0	4.0	1.00	MFM-0608-04
6.0	+0.105	8.0	12.0	8.0	1.00	MFM-0608-08
6.0		10.0	14.0	4.0	2.00	MFM-0610-04
6.0		10.0	14.0	6.0	2.00	MFM-0610-06
6.0		10.0	14.0	10.0	2.00	MFM-0610-10
6.0		11.0	14.0	4.0	2.00	MFM-0611-04
6.0		12.0	14.0	6.0	3.00	MFM-0612-06
6.0		12.0	14.0	10.0	3.00	MFM-0612-10
7.0		11.0	15.0	6.0	2.00	MFM-0711-06
7.0		11.0	15.0	8.0	2.00	MFM-0711-08
8.0		9.0	13.0	5.5	0.50	MFM-0809-055
8.0		10.0	15.0	5.5	1.00	MFM-0810-05
8.0	+0.040	10.0	15.0	7.5	1.00	MFM-0810-07
8.0	+0.130	10.0	15.0	9.5	1.00	MFM-0810-09
8.0		11.0	13.0	5.0	2.00	MFM-0811-05
8.0		11.0	13.0	8.0	2.00	MFM-0811-08
8.0		12.0	16.0	6.0	2.00	MFM-0812-06

d1	d1 Tolerance <sup>3)</sup>	d2	d3	b1 h13	b2 h13	Part No.
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
8.0		12.0	16.0	8.0	2.00	MFM-0812-08
8.0		12.0	16.0	12.0	2.00	MFM-0812-12
8.0		14.0	18.0	6.0	3.00	MFM-0814-06
8.0		14.0	16.0	6.0	3.00	MFM-081416-06
8.0		14.0	18.0	10.0	3.00	MFM-0814-10
8.0		14.0	16.0	10.0	3.00	MFM-081416-10
9.0		14.0	19.0	6.0	2.00	MFM-0914-06
9.0		14.0	19.0	10.0	2.00	MFM-0914-10
9.0		14.0	19.0	14.0	2.00	MFM-0914-14
10.0		12.0	18.0	7.0	1.00	MFM-1012-07
10.0		12.0	18.0	9.0	1.00	MFM-1012-09
10.0		12.0	18.0	9.0	1.00	MFM-1012-09
10.0	+0.040	12.0	18.0	12.0	1.00	MFM-1012-12
10.0	+0.130	12.0	18.0	17.0	1.00	MFM-1012-17
10.0		14.0	19.0	8.0	2.00	MFM-101419-08
10.0		14.0	19.0	10.0	2.00	MFM-1014-10
10.0		14.0	19.0	12.0	1.50	MFM-101419-12
10.0		14.0	20.0	12.0	2.00	MFM-101420-12
10.0		14.0	17.5	14.0	1.00	MFM-1014-14
10.0		14.0	17.5	19.0	1.00	MFM-1014-19
10.0		14.0	17.5	24.0	1.00	MFM-1014-24
10.0		14.0	17.5	34.0	1.00	MFM-1014-34
10.0		16.0	20.0	6.0	3.00	MFM-101620-06
10.0		16.0	22.0	8.0	3.00	MFM-1016-08
10.0		16.0	22.0	10.0	3.00	MFM-1016-10
10.0		16.0	20.0	10.0	3.00	MFM-101620-10
10.0		16.0	22.0	16.0	3.00	MFM-1016-16


<sup>3)</sup> After press-fit. *Testing methods, page 61*

EN 09/2023

## Bearing technology | Plain bearings | iglidur® M250

d1	d1	d2	d3	b1	b2	Part No.	d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13		[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
12.0		14.0	20.0	7.0	1.00	MFM-1214-07	19.0		24.0	27.0	12.0	2.00	MFM-192427-12
12.0		14.0	20.0	9.0	1.00	MFM-1214-09	20.0		23.0	30.0	11.5	1.50	MFM-2023-11
12.0		14.0	20.0	12.0	1.00	MFM-1214-12	20.0		23.0	30.0	16.5	1.50	MFM-2023-16
12.0		14.0	20.0	17.0	1.00	MFM-1214-17	20.0		23.0	30.0	21.5	1.50	MFM-2023-21
12.0		16.0	22.0	10.0	2.00	MFM-1216-10	20.0		26.0	28.0	12.0	3.00	MFM-202628-12
12.0		16.0	22.0	20.0	2.00	MFM-1216-20	20.0		26.0	32.0	15.0	3.00	MFM-2026-15
12.0		18.0	24.0	8.0	3.00	MFM-1218-08	20.0		26.0	32.0	20.0	3.00	MFM-2026-20
12.0		18.0	22.0	10.0	3.00	MFM-1218-10	20.0		26.0	32.0	30.0	3.00	MFM-2026-30
12.0		18.0	24.0	12.0	3.00	MFM-1218-12	22.0		28.0	34.0	15.0	3.00	MFM-2228-15
12.0		18.0	22.0	15.0	3.00	MFM-1218-15	22.0		28.0	34.0	20.0	3.00	MFM-2228-20
12.0		18.0	22.0	20.0	3.00	MFM-1218-20	22.0		28.0	34.0	30.0	3.00	MFM-2228-30
13.0		15.0	20.0	14.0	2.00	MFM-1315-14	24.0		30.0	36.0	15.0	3.00	MFM-2430-15
13.0		16.0	24.0	8.0	2.00	MFM-131624-08	24.0		30.0	36.0	20.0	3.00	MFM-2430-20
14.0		16.0	22.0	12.0	1.00	MFM-1416-12	24.0		30.0	36.0	30.0	3.00	MFM-2430-30
14.0		16.0	22.0	17.0	1.00	MFM-1416-17	25.0		28.0	35.0	11.5	1.50	MFM-2528-11
14.0		20.0	25.0	7.0	3.00	MFM-1420-07	25.0		28.0	35.0	16.5	1.50	MFM-2528-16
14.0		20.0	25.0	10.0	3.00	MFM-1420-10	25.0	+0.065	28.0	35.0	21.5	1.50	MFM-2528-21
14.0		20.0	25.0	15.0	3.00	MFM-1420-15	25.0	+0.195	32.0	38.0	12.0	4.00	MFM-2532-12
14.0		20.0	25.0	20.0	3.00	MFM-1420-20	25.0		32.0	38.0	15.0	4.00	MFM-2532-15
15.0		17.0	23.0	9.0	1.00	MFM-1517-09	25.0		32.0	38.0	20.0	4.00	MFM-2532-20
15.0	+0.050	17.0	23.0	12.0	1.00	MFM-1517-12	25.0		32.0	38.0	30.0	4.00	MFM-2532-30
15.0	+0.160	17.0	23.0	17.0	1.00	MFM-1517-17	25.0		32.0	38.0	40.0	4.00	MFM-2532-40
15.0		21.0	27.0	10.0	3.00	MFM-1521-10	27.0		34.0	40.0	20.0	4.00	MFM-2734-20
15.0		21.0	27.0	15.0	3.00	MFM-1521-15	27.0		34.0	40.0	30.0	4.00	MFM-2734-30
15.0		21.0	27.0	20.0	3.00	MFM-1521-20	27.0		34.0	40.0	40.0	4.00	MFM-2734-40
15.0		21.0	27.0	25.0	3.00	MFM-1521-25	28.0		36.0	42.0	20.0	4.00	MFM-2836-20
16.0		18.0	28.0	8.0	2.00	MFM-1618-08/02	28.0		36.0	42.0	30.0	4.00	MFM-2836-30
16.0		18.0	24.0	12.0	1.00	MFM-1618-12	28.0		36.0	42.0	40.0	4.00	MFM-2836-40
16.0		18.0	24.0	17.0	1.00	MFM-1618-17	30.0		34.0	42.0	16.0	2.00	MFM-3034-16
16.0		22.0	28.0	12.0	3.00	MFM-1622-12	30.0		34.0	42.0	26.0	2.00	MFM-3034-26
16.0		22.0	28.0	15.0	3.00	MFM-1622-15	30.0		35.0	44.0	20.0	4.00	MFM-3035-20
16.0		22.0	28.0	20.0	3.00	MFM-1622-20	30.0		38.0	44.0	20.0	4.00	MFM-3038-20
16.0		22.0	28.0	25.0	3.00	MFM-1622-25	30.0		38.0	44.0	30.0	4.00	MFM-3038-30
18.0		20.0	26.0	12.0	1.00	MFM-1820-12	30.0		38.0	44.0	40.0	4.00	MFM-3038-40
18.0		20.0	26.0	17.0	1.00	MFM-1820-17	32.0		40.0	46.0	20.0	4.00	MFM-3240-20
18.0		20.0	26.0	22.0	1.00	MFM-1820-22	32.0		40.0	46.0	30.0	4.00	MFM-3240-30
18.0		24.0	26.0	7.8	3.00	MFM-182426-078	32.0		40.0	46.0	40.0	4.00	MFM-3240-40
18.0		24.0	30.0	8.0	3.00	MFM-1824-08	35.0	+0.080	39.0	47.0	16.0	2.00	MFM-3539-16
18.0		24.0	30.0	12.0	3.00	MFM-1824-12	35.0	+0.240	39.0	47.0	26.0	2.00	MFM-3539-26
18.0		24.0	30.0	18.0	3.00	MFM-1824-18	40.0		44.0	52.0	30.0	2.00	MFM-4044-30
18.0		24.0	30.0	20.0	3.00	MFM-1824-20	40.0		44.0	52.0	40.0	2.00	MFM-4044-40
18.0		24.0	30.0	30.0	3.00	MFM-1824-30	45.0		50.0	58.0	50.0	2.00	MFM-4550-50

<sup>3)</sup> After press-fit. Testing methods, page 61

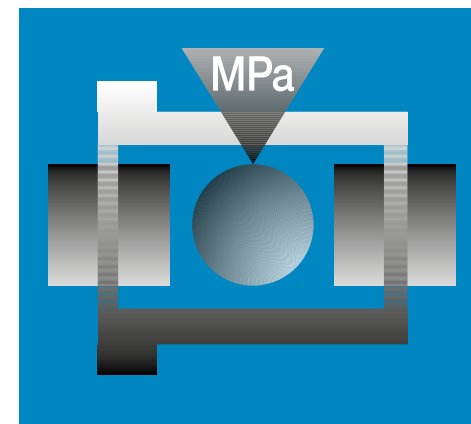

**Specialist for pivoting, rolling applications and more**  
Low coefficient of friction and wear on almost every shaft  
**iglidur® P210**



**When to use it?**

- When a universal plain bearing for use in a wet environment is required
- When a wear-resistant plain bearing for pivoting applications at medium loads is required
- When edge loads and shocks occur
- When the surface pressure of iglidur® J is insufficient




**When not to use it?**

- When a universal plain bearing with the largest possible range of dimensions is required  
*iglidur® G*
- When a plain bearing for highly loaded pivoting applications is required  
*iglidur® Q, iglidur® Q2*
- When temperatures are higher than +100°C  
*iglidur® G, iglidur® J350*

# Bearing technology | Plain bearings | iglidur® P210



Ø  
4.0-50.0mm

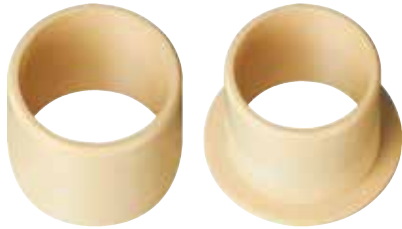

Also available as:



Bar stock, round bar  
Page 743

## Specialist for pivoting, rolling applications and more

### Low coefficient of friction and wear on almost every shaft



Bar stock, plate  
Page 773

This versatile material has already proven its worth in many customer-specific solutions and as a bar stock material. Clip-on or pre-loaded designs as well as vehicle interior applications are possible. Now available in a standard size range from stock.

- Low moisture absorption
- Versatile: performance on many different shafts
- Suitable for high edge pressures
- Lubrication-free
- Maintenance-free



tribo-tape liner  
Page 781

#### Typical application areas

- Agricultural machines
- Furniture/Industrial design
- Textile industry
- Doors and gates
- Mechanical engineering



Guide rings  
Page 641



Two hole flange bearings  
Page 667



Moulded special parts  
Page 696

Descriptive technical specifications				
Wear resistance at +23°C	-	<div style="width: 80%; background-color: #0070C0;"></div>		+
Wear resistance at +90°C	-	<div style="width: 70%; background-color: #0070C0;"></div>		+
Wear resistance at +150°C	-	<div style="width: 60%; background-color: #0070C0;"></div>		+
Slide property	-	<div style="width: 90%; background-color: #0070C0;"></div>		+
Wear resistance under water	-	<div style="width: 80%; background-color: #0070C0;"></div>		+
Media resistance	-	<div style="width: 70%; background-color: #0070C0;"></div>		+
Resistant to edge pressures	-	<div style="width: 90%; background-color: #0070C0;"></div>		+
Resistant to shock and impact loads	-	<div style="width: 90%; background-color: #0070C0;"></div>		+
Dirt resistance	-	<div style="width: 80%; background-color: #0070C0;"></div>		+



igubal® spherical balls  
Page 993

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)

EN 09/2023



# Technical data

General properties		Testing method	
Density	g/cm <sup>3</sup>	1.40	
Colour		yellow	
Max. moisture absorption at +23°C/50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	0.5	
Coefficient of friction, dynamic, against steel	μ	0.07-0.19	
pv value, max. (dry)	MPa · m/s	0.40	
Mechanical properties			
Flexural modulus	MPa	2,500	DIN 53457
Flexural strength at +20°C	MPa	70	DIN 53452
Compressive strength	MPa	50	
Max. permissible surface pressure (+20°C)	MPa	50	
Shore D hardness		75	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+100	
Max. application temperature short-term	°C	+160	
Min. application temperature	°C	-40	
Thermal conductivity	W/m · K	0.25	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	8	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	> 10 <sup>12</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>11</sup>	DIN 53482

Table 01: Material properties

iglidur® P210 plain bearings provide the user with versatile all-round bearings, which have proven to have above average service life, primarily in pivoting applications at medium loads of up to 20MPa.

#### Moisture absorption

The humidity absorption of iglidur® P210 bearings amounts to about 0.3 % weight in standard climatic conditions. The saturation limit submerged in water is 0.5% weight. This low moisture absorption is well below the values of iglidur® G.

#### Vacuum

In vacuum, any present moisture is released as vapour. The use in vacuum is only possible to a limited extent.

#### Radiation resistance

Plain bearings made from iglidur® P210 have limited use under radioactive radiation. They are resistant up to a radiation intensity of 3 - 10<sup>2</sup> Gy.

#### Resistance to weathering

iglidur® P210 plain bearings are continuously resistant to weathering. The material properties are only slightly affected. Possible discolourations are only superficial.

#### Mechanical properties

With increasing temperatures, the compressive strength of iglidur® P210 plain bearings decreases. Diagram 02 shows this inverse relationship. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this.

Diagram 03 shows the elastic deformation of iglidur® P210 as a function of radial pressure. At the recommended maximum surface pressure of 50MPa the deformation is less than 3% at room temperature.

#### Surface pressure, page 45



-40°C up to +100°C



50MPa



EN 09/2023



## Permissible surface speeds

Plain bearings made from iglidur® P210 are maintenance-free, they are developed for low to medium surface speeds. The maximum values given in table 03 can only be achieved at a very low surface pressure. The maximum speed given is the speed at which an increase up to the continuous use temperature occurs due to friction.

**Surface speed, page 48**

## Temperature

Also thanks to its maximum long-term application temperature of +100°C, iglidur® P210 is suitable for a wide range of applications. If even higher temperatures are required, iglidur® G is also available with a max. long-term application temperature of +130°C. The temperatures prevailing in the bearing system also have an influence on the wear. The wear rises with increasing temperatures. For temperatures over +50°C an additional securing is required.

**Application temperatures, page 53**

**Additional securing, page 53**

## Friction and wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the surface speed and load (diagrams 04 and 05).

**Coefficient of friction and surfaces, page 51**

**Wear resistance, page 54**

## Shaft materials

Diagram 06 shows results of testing different shaft materials with plain bearings made from iglidur® P210. For rotational movements at radial loads below 1MPa, iglidur® P210 has generally very low wear. Wear is only significantly higher in combination with HR carbon steel shafts. Generally, rotational wear will be higher than for a pivoting application of equal load. This is only reversed at loads above 25MPa (diagram 07).

**Shaft materials, page 56**

## Installation tolerances

iglidur® P210 plain bearings are standard bearings for shafts with h tolerance (recommended minimum h9). The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, the inner diameter automatically adjusts to the E10 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table).

**Testing methods, page 61**

Chemicals	Resistance
Alcohols	+
Diluted acids	0
Diluted alkalines	-
Fuels	+
Greases, oils without additives	+
Hydrocarbons	-
Strong acids	-
Strong alkalines	-

All data given at room temperature [+20°C]

Table 02: Chemical resistance

**Chemical table, page 1170**

	Rotating	Oscillating	linear
Long-term m/s	1.0	0.7	3.0
Short-term m/s	2.0	1.4	4.0

Table 03: Maximum surface speeds

	Dry	Greases	Oil	Water
Coefficient of friction $\mu$	0.07-0.19	0.09	0.04	0.04

Table 04: Coefficient of friction against steel (Ra = 1  $\mu$ m, 50HRC)

Ø d1 [mm]	Housing		Plain bearings		Shaft	
	H7 [mm]	E10 [mm]	E10 [mm]	h9 [mm]		
0-3	+0.000	+0.010	+0.014	+0.054	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.020	+0.068	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.025	+0.083	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.032	+0.102	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.040	+0.124	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.050	+0.150	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.060	+0.180	-0.074	+0.000
> 80-120	+0.000	+0.035	+0.072	+0.212	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.085	+0.245	-0.100	+0.000

Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit

## Technical data

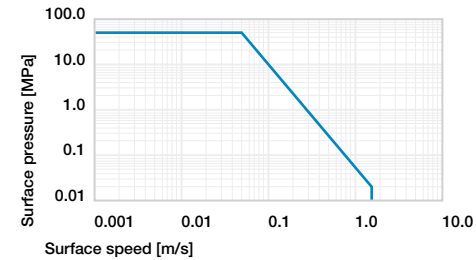


Diagram 01: Permissible pv values for iglidur® P210 with a wall thickness of 1mm dry operation against a steel shaft at +20°C, mounted in a steel housing

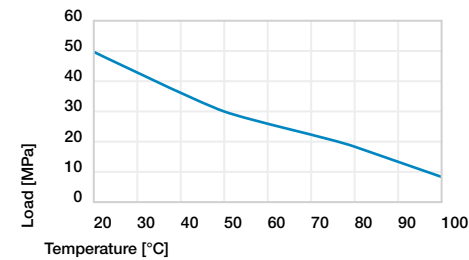


Diagram 02: Maximum recommended surface pressure as a function of temperature (50MPa at +20°C)

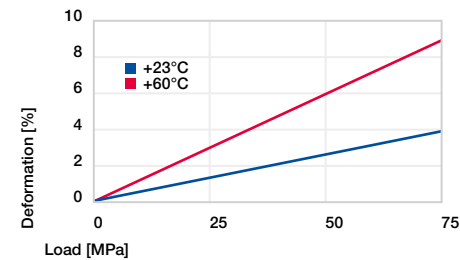


Diagram 03: Deformation under pressure and temperature

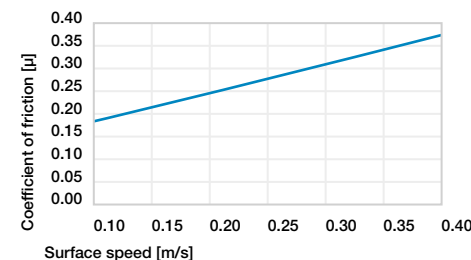


Diagram 04: Coefficient of friction as a function of the surface speed, p = 1 MPa

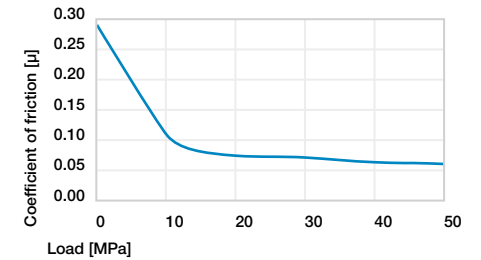


Diagram 05: Coefficient of friction as a function of the pressure, v = 0.01m/s

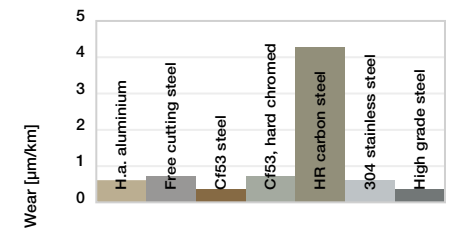


Diagram 06: Wear, rotating with different shaft materials, pressure, p = 1MPa, v = 0.3m/s


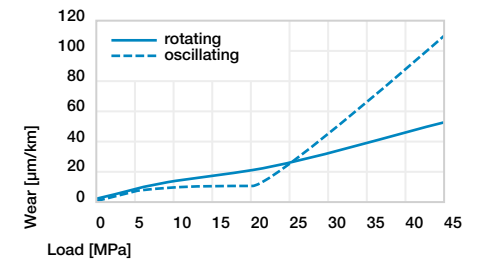


Diagram 07: Wear for oscillating and rotating applications with shaft material Cf53 hardened and ground steel, as a function of the load

## Sleeve bearings (form S)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2



Dimensions according to ISO 3547-1 and special dimensions



Order example: **P210SM-0405-04** – no minimum order quantity.

**P210** iglidur® material **S** Cylindrical **M** Metric **04** Inner Ø d1 **05** Outer Ø d2 **04** Total length b1

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
4.0		5.5	4.0	P210SM-0405-04
4.0		5.5	6.0	P210SM-0405-06
5.0	+0.020	7.0	5.0	P210SM-0507-05
5.0	+0.068	7.0	10.0	P210SM-0507-10
6.0		8.0	6.0	P210SM-0608-06
6.0		8.0	8.0	P210SM-0608-08
6.0		8.0	10.0	P210SM-0608-10
8.0		10.0	8.0	P210SM-0810-08
8.0		10.0	10.0	P210SM-0810-10
8.0		10.0	12.0	P210SM-0810-12
10.0	+0.025	12.0	8.0	P210SM-1012-08
10.0	+0.083	12.0	10.0	P210SM-1012-10
10.0		12.0	12.0	P210SM-1012-12
10.0		12.0	15.0	P210SM-1012-15
10.0		12.0	20.0	P210SM-1012-20
12.0		14.0	10.0	P210SM-1214-10
12.0		14.0	12.0	P210SM-1214-12
12.0		14.0	15.0	P210SM-1214-15
12.0		14.0	20.0	P210SM-1214-20
13.0		15.0	10.0	P210SM-1315-10
13.0		15.0	20.0	P210SM-1315-20
14.0	+0.032	16.0	15.0	P210SM-1416-15
14.0	+0.102	16.0	20.0	P210SM-1416-20
14.0		16.0	25.0	P210SM-1416-25
15.0		17.0	15.0	P210SM-1517-15
15.0		17.0	20.0	P210SM-1517-20
15.0		17.0	25.0	P210SM-1517-25
16.0		18.0	15.0	P210SM-1618-15
16.0		18.0	20.0	P210SM-1618-20

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
16.0		18.0	25.0	P210SM-1618-25
18.0	+0.032	20.0	15.0	P210SM-1820-15
18.0	+0.102	20.0	20.0	P210SM-1820-20
18.0		20.0	25.0	P210SM-1820-25
20.0		23.0	10.0	P210SM-2023-10
20.0		23.0	15.0	P210SM-2023-15
20.0		23.0	20.0	P210SM-2023-20
20.0		23.0	25.0	P210SM-2023-25
20.0		23.0	30.0	P210SM-2023-30
22.0		25.0	15.0	P210SM-2225-15
22.0		25.0	20.0	P210SM-2225-20
22.0		25.0	25.0	P210SM-2225-25
22.0		25.0	30.0	P210SM-2225-30
24.0		27.0	15.0	P210SM-2427-15
24.0		27.0	20.0	P210SM-2427-20
24.0	+0.040	27.0	25.0	P210SM-2427-25
24.0	+0.124	27.0	30.0	P210SM-2427-30
25.0		28.0	15.0	P210SM-2528-15
25.0		28.0	20.0	P210SM-2528-20
25.0		28.0	25.0	P210SM-2528-25
25.0		28.0	30.0	P210SM-2528-30
28.0		32.0	20.0	P210SM-2832-20
28.0		32.0	25.0	P210SM-2832-25
28.0		32.0	30.0	P210SM-2832-30
30.0		34.0	20.0	P210SM-3034-20
30.0		34.0	25.0	P210SM-3034-25
30.0		34.0	30.0	P210SM-3034-30
30.0		34.0	40.0	P210SM-3034-40

<sup>3)</sup> After press-fit. *Testing methods, page 61*

## Product range

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
32.0		36.0	20.0	P210SM-3236-20
32.0		36.0	30.0	P210SM-3236-30
32.0		36.0	40.0	P210SM-3236-40
35.0		39.0	20.0	P210SM-3539-20
35.0	+0.050	39.0	30.0	P210SM-3539-30
35.0	+0.150	39.0	40.0	P210SM-3539-40
35.0		39.0	50.0	P210SM-3539-50
40.0		44.0	20.0	P210SM-4044-20
40.0		44.0	30.0	P210SM-4044-30
40.0		44.0	40.0	P210SM-4044-40

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
40.0		44.0	50.0	P210SM-4044-50
45.0		50.0	20.0	P210SM-4550-20
45.0		50.0	30.0	P210SM-4550-30
45.0		50.0	40.0	P210SM-4550-40
45.0	+0.050	50.0	50.0	P210SM-4550-50
50.0	+0.150	55.0	20.0	P210SM-5055-20
50.0		55.0	30.0	P210SM-5055-30
50.0		55.0	40.0	P210SM-5055-40
50.0		55.0	50.0	P210SM-5055-50
50.0		55.0	60.0	P210SM-5055-60

<sup>3)</sup> After press-fit. *Testing methods, page 61*



### Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



### Order online

including delivery times, prices, online tools

[www.igus.eu/P210](http://www.igus.eu/P210)



### Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

### Discount scaling

1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.


No low-quantity surcharges.

Free shipping within Germany for orders above €150.



# Bearing technology | Plain bearings | iglidur® P210

## Flange bearings (form F)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2

**i** Dimensions according to ISO 3547-1 and special dimensions




Order example: **P210FM-0608-04** – no minimum order quantity.

**P210** iglidur® material **F** With flange **M** Metric **06** Inner Ø d1 **08** Outer Ø d2 **04** Total length b1

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
6.0		8.0	12.0	4.0	1.00	<b>P210FM-0608-04</b>
6.0	+0.020	8.0	12.0	6.0	1.00	<b>P210FM-0608-06</b>
6.0	+0.068	8.0	12.0	8.0	1.00	<b>P210FM-0608-08</b>
8.0		10.0	15.0	5.5	1.00	<b>P210FM-0810-05</b>
8.0		10.0	15.0	7.5	1.00	<b>P210FM-0810-07</b>
8.0		10.0	15.0	9.5	1.00	<b>P210FM-0810-09</b>
8.0		10.0	15.0	10.0	1.00	<b>P210FM-0810-10</b>
8.0	+0.025	10.0	16.0	15.0	1.50	<b>P210FM-081016-15</b>
10.0	+0.083	12.0	18.0	7.0	1.00	<b>P210FM-1012-07</b>
10.0		12.0	18.0	9.0	1.00	<b>P210FM-1012-09</b>
10.0		12.0	18.0	10.0	1.00	<b>P210FM-1012-10</b>
10.0		12.0	18.0	12.0	1.00	<b>P210FM-1012-12</b>
10.0		12.0	18.0	17.0	1.00	<b>P210FM-1012-17</b>
12.0		14.0	20.0	7.0	1.00	<b>P210FM-1214-07</b>
12.0		14.0	20.0	9.0	1.00	<b>P210FM-1214-09</b>
12.0		14.0	20.0	12.0	1.00	<b>P210FM-1214-12</b>
12.0	+0.032	14.0	20.0	17.0	1.00	<b>P210FM-1214-17</b>
14.0	+0.102	16.0	22.0	12.0	1.00	<b>P210FM-1416-12</b>
14.0		16.0	22.0	17.0	1.00	<b>P210FM-1416-17</b>
15.0		17.0	23.0	9.0	1.00	<b>P210FM-1517-09</b>
15.0		17.0	23.0	12.0	1.00	<b>P210FM-1517-12</b>

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
15.0		17.0	23.0	17.0	1.00	<b>P210FM-1517-17</b>
16.0		18.0	24.0	12.0	1.00	<b>P210FM-1618-12</b>
16.0	+0.032	18.0	24.0	17.0	1.00	<b>P210FM-1618-17</b>
18.0	+0.102	20.0	26.0	12.0	1.00	<b>P210FM-1820-12</b>
18.0		20.0	26.0	17.0	1.00	<b>P210FM-1820-17</b>
18.0		20.0	26.0	22.0	1.00	<b>P210FM-1820-22</b>
20.0		23.0	30.0	11.5	1.50	<b>P210FM-2023-11</b>
20.0		23.0	30.0	16.5	1.50	<b>P210FM-2023-16</b>
20.0		23.0	30.0	21.5	1.50	<b>P210FM-2023-21</b>
25.0	+0.040	28.0	35.0	11.5	1.50	<b>P210FM-2528-11</b>
25.0	+0.124	28.0	35.0	16.5	1.50	<b>P210FM-2528-16</b>
25.0		28.0	35.0	21.5	1.50	<b>P210FM-2528-21</b>
30.0		34.0	42.0	16.0	2.00	<b>P210FM-3034-16</b>
30.0		34.0	42.0	26.0	2.00	<b>P210FM-3034-26</b>
35.0	+0.050	39.0	47.0	16.0	2.00	<b>P210FM-3539-16</b>
35.0	+0.124	39.0	47.0	26.0	2.00	<b>P210FM-3539-26</b>
40.0	+0.040	44.0	52.0	30.0	2.00	<b>P210FM-4044-30</b>
40.0	+0.124	44.0	52.0	40.0	2.00	<b>P210FM-4044-40</b>
45.0		50.0	58.0	50.0	2.00	<b>P210FM-4550-50</b>

<sup>3)</sup> After press-fit. Testing methods, page 61

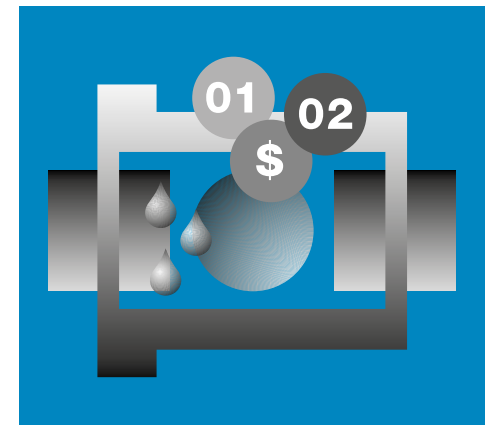

## The low-cost all-rounder

Well-balanced properties at a low price

## iglidur® P230



When to use it?

- When a cost-effective all-round bearing for high volumes is required
- When a low-cost bearing with low moisture absorption is required
- When low pv values occur



When not to use it?

- When a cost-effective all-rounder for small quantities is required  
*iglidur® G*
- When high wear resistance is required  
*iglidur® G, iglidur® G1*
- When continuous operating temperatures are higher than +110°C  
*iglidur® G, iglidur® G1*

# Bearing technology | Plain bearings | iglidur® P230



∅  
-



Also available as:



Bar stock, round bar  
Page 743



Bar stock, plate  
Page 773



tribo-tape liner  
Page 781



Guide rings  
Page 641



Two hole flange bearings  
Page 667



Moulded special parts  
Page 696



igubal® spherical balls  
Page 993

## The low-cost all-rounder Well-balanced properties at a low price

Developed for (large-scale) series application, iglidur® P230 has a well-balanced property profile compared to other iglidur® low-cost materials.

- Good wear resistance
- High media resistance
- Cost-effective
- For low and medium loads
- For applications with low pv values

### Typical application areas

- Industrial series-production applications
- Mechanical engineering and jig construction
- Two-wheeler

Descriptive technical specifications				
Wear resistance at +23°C	-	<div style="width: 25%; background-color: #0070C0;"></div>		+
Wear resistance at +90°C	-	<div style="width: 25%; background-color: #0070C0;"></div>		+
Wear resistance at +150°C	-	<div style="width: 10%; background-color: #0070C0;"></div>		+
Slide property	-	<div style="width: 50%; background-color: #0070C0;"></div>		+
Wear resistance under water	-	<div style="width: 25%; background-color: #0070C0;"></div>		+
Media resistance	-	<div style="width: 75%; background-color: #0070C0;"></div>		+
Resistant to edge pressures	-	<div style="width: 75%; background-color: #0070C0;"></div>		+
Resistant to shock and impact loads	-	<div style="width: 75%; background-color: #0070C0;"></div>		+
Dirt resistance	-	<div style="width: 50%; background-color: #0070C0;"></div>		+

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)



EN 09/2023

# Technical data

General properties		Testing method	
Density	g/cm <sup>3</sup>	1.57	
Colour		beige	
Max. moisture absorption at +23°C/50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.3	
Coefficient of friction, dynamic, against steel	μ	0.13-0.32	
pv value, max. (dry)	MPa · m/s	0.30	
Mechanical properties			
Flexural modulus	MPa	6,532	DIN 53457
Flexural strength at +20°C	MPa	173	
Compressive strength	MPa	101	
Max. permissible surface pressure (+20°C)	MPa	60	
Shore D hardness		80	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+110	
Max. application temperature short-term	°C	+180	
Min. application temperature	°C	-30	
Thermal conductivity	W/m · K	0.34	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	5	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	>10 <sup>12</sup>	DIN IEC 93
Surface resistance	Ω	>10 <sup>12</sup>	DIN 53482

Table 01: Material properties

iglidur® P230 is a material with low moisture absorption and well-balanced thermal properties for use in cost-sensitive series-production applications. Good wear resistance at low pv values and low to medium speeds and loads round off the all-round profile.

### Moisture absorption

The humidity absorption of iglidur® P230 bearings amounts to about 0.1% weight in standard climatic conditions. The saturation limit submerged in water is 0.3% weight. This low moisture absorption is well below the values of iglidur® M250 or iglidur® G.

### Vacuum

In vacuum, any present moisture is released as vapour. Use in vacuum is only possible with dehumidified iglidur® P230 bearings.

### Radiation resistance

Plain bearings made from iglidur® P230 have limited use under radioactive radiation. They are resistant up to a radiation intensity of 3 · 10<sup>2</sup> Gy.

### Resistance to weathering

iglidur® P230 plain bearings have not yet been tested

for their resistance to weathering. Please consult igus® if you're planning to use them outdoors.

### Mechanical properties

When temperatures increase, the compressive strength of iglidur® P230 plain bearings decreases. Diagram 02 shows this inverse relationship. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this.

Diagram 03 shows the elastic deformation of iglidur® P230 as a function of radial pressure. At the recommended maximum surface pressure of 60MPa the deformation is less than 3% at room temperature. A plastic deformation can be negligible up to this value. It is however also dependent on the duty cycle of the load.

**Surface pressure, page 45**



-30°C up to +110°C



60MPa



## Permissible surface speeds

iglidur® P230 was developed for low to average surface speeds. During continuous operation, a maximum speed of 1.0m/s (rotating) or 3.0m/s (linear) is permissible. The maximum values shown in table 03 can only be achieved at low pressures. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, though, this level is rarely reached due to varying application conditions.

**Surface speed, page 48**

## Temperature

Also thanks to its maximum long-term application temperature of +110°C, iglidur® P230 is suitable for a wide range of applications. If even higher temperatures are required, the best-seller iglidur® G (+130°C) or the new standard iglidur® G1 (+180°C) are available. The temperatures prevailing in the bearing system also have an influence on the wear. The wear rises with increasing temperatures. For temperatures over +100°C an additional securing is required.

**Application temperatures, page 53**

**Additional securing, page 53**

## Friction and wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the surface speed and load (diagram 04).

**Coefficient of friction and surfaces, page 51**

**Wear resistance, page 54**

## Shaft materials

Diagram 06 shows results of testing different shaft materials with plain bearings made from iglidur® P230. For rotating movements with 1 MPa radial load, wear on all shafts is low, with the "soft" shaft types providing the higher coefficients of wear. The comparison of pivoting and rotational movements (diagram 07) shows fewer differences than with many other iglidur® materials. The limitation of iglidur® P230 to low to medium loads becomes clear.

**Shaft materials, page 56**

## Installation tolerances

iglidur® P230 plain bearings are standard bearings for shafts with h tolerance (recommended minimum h9). The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, the inner diameter automatically adjusts to the E10 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table).

**Testing methods, page 61**

## Product range

iglidur® P230 plain bearings are currently manufactured to special order.

Chemicals	Resistance
Alcohols	+ up to 0
Diluted acids	+
Diluted alkalines	+
Fuels	+
Greases, oils without additives	+
Hydrocarbons	+
Strong acids	+
Strong alkalines	+ up to 0

All data given at room temperature [+20°C]

Table 02: Chemical resistance

**Chemical table, page 1170**

	Rotating	Oscillating	linear
Long-term m/s	1.0	0.7	3.0
Short-term m/s	2.0	1.4	4.0

Table 03: Maximum surface speeds

	Dry	Greases	Oil	Water
Coefficient of friction $\mu$	0.13-0.32	0.09	0.04	0.04

Table 04: Coefficient of friction against steel (Ra = 1  $\mu$ m, 50HRC)

Ø d1 [mm]	Housing		Plain bearings		Shaft	
	H7 [mm]	E10 [mm]	H7 [mm]	E10 [mm]	h9 [mm]	h9 [mm]
0-3	+0.000	+0.010	+0.014	+0.054	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.020	+0.068	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.025	+0.083	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.032	+0.102	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.040	+0.124	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.050	+0.150	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.060	+0.180	-0.074	+0.000
> 80-120	+0.000	+0.035	+0.072	+0.212	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.085	+0.245	-0.100	+0.000

Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit

## Technical data

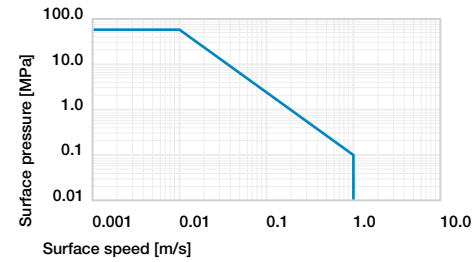


Diagram 01: Permissible pv values for iglidur® P230 with a wall thickness of 1mm dry operation against a steel shaft at +20°C, mounted in a steel housing

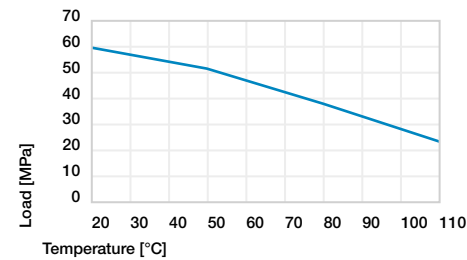


Diagram 02: Maximum recommended surface pressure as a function of temperature (60MPa at +20°C)

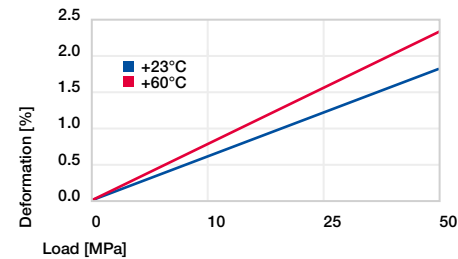


Diagram 03: Deformation under pressure and temperature

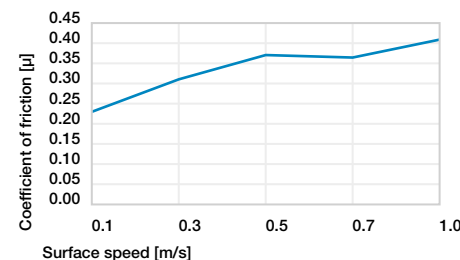


Diagram 04: Coefficient of friction as a function of the surface speed, p = 1MPa

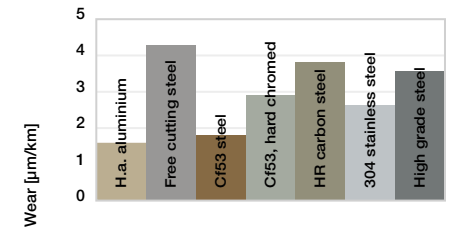


Diagram 05: Wear, rotating with different shaft materials, pressure, p = 1MPa, v = 0.3m/s


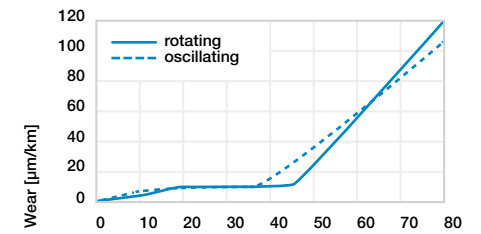


Diagram 06: Wear for oscillating and rotating applications with shaft material Cf53 hardened and ground steel, as a function of the load

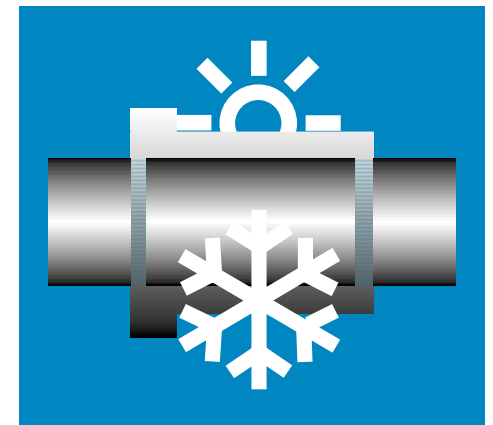

## The cost-effective outdoor all-rounder

No moisture absorption even with high ambient humidity

### igidur® P



#### When to use it?

- When low moisture absorption is fundamental
- When a cost-effective plain bearing for high pressure loads is required
- When high precision in high humidity and moderately high temperatures are required



#### When not to use it?

- When the maximum application temperature is above +120°C  
*igidur® K*
- When mechanical reaming of the bore is necessary  
*igidur® M250*
- When the highest wear resistance is required  
*igidur® W300*

# Bearing technology | Plain bearings | iglidur® P



Ø 3.0-95.0mm



Also available as:



Bar stock, round bar  
Page 743

## The cost-effective outdoor all-rounder No moisture absorption even with high ambient humidity

Due to thermal stability and low water absorption, the iglidur® P bearings are among the most dimensionally strong all-round bearings under varying environmental conditions. iglidur® P plain bearings are recommended for pivoting and rotational movements at average loads.

- Low moisture absorption
- High wear resistance
- Suitable for high loads
- Cost-effective
- Lubrication-free
- Standard range from stock
- Maintenance-free



Bar stock, plate  
Page 773



tribo-tape liner  
Page 781

### Typical application areas

- Solar technology
- Mechanical engineering
- Doors and gates
- Railway technology
- Sports and leisure



Guide rings  
Page 641



Two hole flange bearings  
Page 667



Moulded special parts  
Page 696



iglobal® spherical balls  
Page 993

Descriptive technical specifications				
Wear resistance at +23°C	-	<div style="width: 40%; background-color: #0070C0;"></div>		+
Wear resistance at +90°C	-	<div style="width: 40%; background-color: #0070C0;"></div>		+
Wear resistance at +150°C	-	<div style="width: 10%; background-color: #0070C0;"></div>		+
Slide property	-	<div style="width: 80%; background-color: #0070C0;"></div>		+
Wear resistance under water	-	<div style="width: 40%; background-color: #0070C0;"></div>		+
Media resistance	-	<div style="width: 40%; background-color: #0070C0;"></div>		+
Resistant to edge pressures	-	<div style="width: 80%; background-color: #0070C0;"></div>		+
Resistant to shock and impact loads	-	<div style="width: 80%; background-color: #0070C0;"></div>		+
Dirt resistance	-	<div style="width: 40%; background-color: #0070C0;"></div>		+

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)

EN 09/2023

# Technical data

General properties		Testing method	
Density	g/cm <sup>3</sup>	1.58	
Colour		black	
Max. moisture absorption at +23°C/50% r.h.	% weight	0.2	DIN 53495
Max. moisture absorption	% weight	0.4	
Coefficient of friction, dynamic, against steel	μ	0.06-0.21	
pv value, max. (dry)	MPa · m/s	0.39	
Mechanical properties			
Flexural modulus	MPa	5,300	DIN 53457
Flexural strength at +20°C	MPa	120	DIN 53452
Compressive strength	MPa	66	
Max. permissible surface pressure (+20°C)	MPa	50	
Shore D hardness		75	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+130	
Max. application temperature short-term	°C	+200	
Min. application temperature	°C	-40	
Thermal conductivity	W/m · K	0.25	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	4	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	> 10 <sup>13</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>12</sup>	DIN 53482

Table 01: Material properties

The iglidur® P plain bearings are a cost-effective, maintenance-free bearing solution for the user. Compared to iglidur® G, plain bearings made from iglidur® P are suitable for use with rotational movements and average loads.

### Moisture absorption

The moisture absorption of iglidur® P plain bearings in ambient conditions is approximately 0.2% weight. The saturation limit submerged in water is 0.4% weight. This low moisture absorption is well below the values of iglidur® G.

### Vacuum

In vacuum, any present moisture is released as vapour. The use in vacuum is only possible to a limited extent.

### Radiation resistance

Plain bearings made from iglidur® P have limited use under radioactive radiation. They are resistant up to a radiation intensity of 5 · 10<sup>2</sup> Gy.

### Resistance to weathering

iglidur® P plain bearings are continuously resistant to weathering. The material properties are only slightly affected. Possible discolourations are only superficial.

### Mechanical properties

With increasing temperatures, the compressive strength of iglidur® P plain bearings decreases. Diagram 02 shows this inverse relationship. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this.

Diagram 03 shows the elastic deformation of iglidur® P at radial loads. At the maximum recommended surface pressure of 50MPa, the deformation is less than 4%.

**Surface pressure, page 45**



-40°C up to +130°C



50MPa



HB



## Permissible surface speeds

Plain bearings made from iglidur® P are maintenance-free plain bearings developed for low to medium surface speeds. The maximum values given in table 03 can only be achieved at a very low surface pressure. The maximum speed given is the speed at which an increase up to the continuous use temperature occurs due to friction.

**Surface speed, page 48**

## Temperature

Even with its maximum long-term application temperature of +130°C, the values for iglidur® P do not quite come up to those of iglidur® G. The temperatures prevailing in the bearing system also have an influence on the wear. The wear rises with increasing temperatures. For temperatures over +90°C an additional securing is required.

**Application temperatures, page 53**

**Additional securing, page 53**

## Friction and wear

The coefficient of friction declines just as the wear resistance with increasing load (diagrams 04 and 05). iglidur® P plain bearings obtain a minimum coefficient of friction on shafts with a surface finish Ra from 0.1-0.2µm. Both smoother and rougher shaft surface finish cause the friction to clearly increase.

**Coefficient of friction and surfaces, page 51**

**Wear resistance, page 54**

## Shaft materials

Diagram 06 shows results of testing different shaft materials with plain bearings made from iglidur® P. For rotational movements, the wear of iglidur® P with Cf53 and HR carbon steel shafts is very low. On the other hand, the bearings hard-chromed shafts result in higher wear than other shaft materials even in the low load range. For example at a load of 2MPa, cold rolled steel is six times better than 304 stainless steel. For pivoting movement, hardened shafts and 304 stainless steel perform better than that of a softer unhardened carbon shafts.

**Shaft materials, page 56**

## Installation tolerances

iglidur® P plain bearings are standard bearings for shafts with h-tolerance (recommended minimum h9). The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, the inner diameter automatically adjusts to the E10 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table).

**Testing methods, page 61**

Chemicals	Resistance
Alcohols	+
Diluted acids	0
Diluted alkalines	-
Fuels	+
Greases, oils without additives	+
Hydrocarbons	-
Strong acids	-
Strong alkalines	-

All data given at room temperature [+20°C]

Table 02: Chemical resistance

**Chemical table, page 1170**

	Rotating	Oscillating	linear
Long-term m/s	1.0	0.7	3.0
Short-term m/s	2.0	1.4	4.0

Table 03: Maximum surface speeds

	Dry	Greases	Oil	Water
Coefficient of friction µ	0.06-0.21	0.09	0.04	0.04

Table 04: Coefficient of friction against steel (Ra = 1µm, 50HRC)

Ø d1 [mm]	Housing		Plain bearings		Shaft	
	H7 [mm]	E10 [mm]	E10 [mm]	h9 [mm]	h9 [mm]	h9 [mm]
0-3	+0.000	+0.010	+0.014	+0.054	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.020	+0.068	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.025	+0.083	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.032	+0.102	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.040	+0.124	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.050	+0.150	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.060	+0.180	-0.074	+0.000
> 80-120	+0.000	+0.035	+0.072	+0.212	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.085	+0.245	-0.100	+0.000

Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit

## Technical data

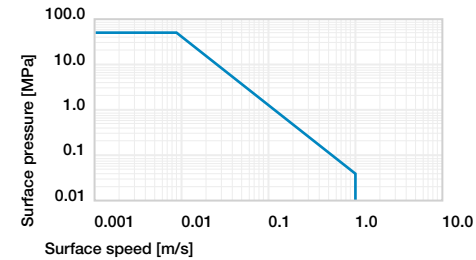


Diagram 01: Permissible pv values for iglidur® P plain bearing with a wall thickness of 1 mm dry operation against a steel shaft at +20°C, mounted in a steel housing.

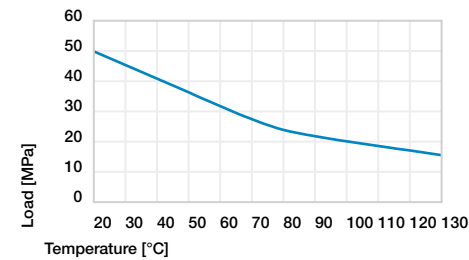


Diagram 02: Maximum recommended surface pressure as a function of temperature (50MPa at +20°C)

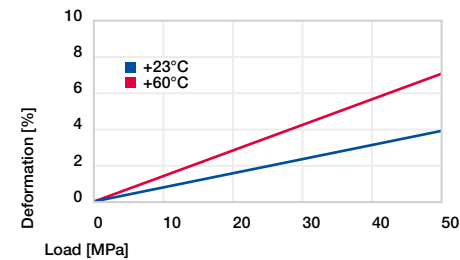


Diagram 03: Deformation under pressure and temperature

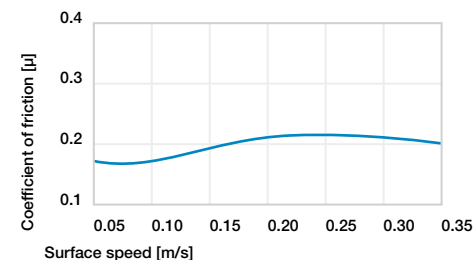


Diagram 04: Coefficient of friction as a function of the surface speed, p = 0.75MPa

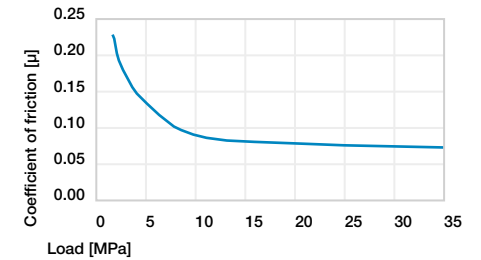


Diagram 05: Coefficient of friction as a function of the pressure, v = 0.01m/s

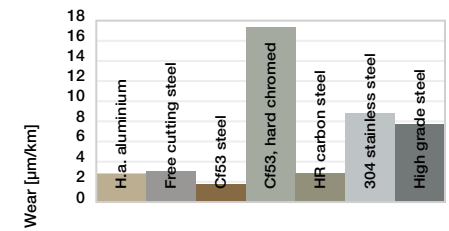


Diagram 06: Wear, rotating with different shaft materials, pressure, p = 1MPa, v = 0.3m/s


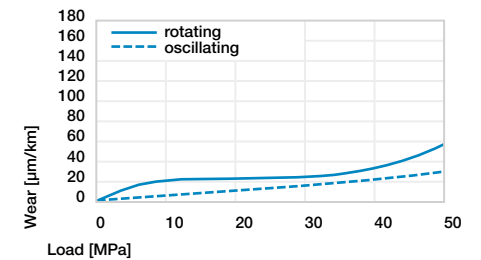


Diagram 07: Wear for oscillating and rotating applications with shaft material Cf53 hardened and ground steel, as a function of the load

## Sleeve bearings (form S)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2

**i** Dimensions according to ISO 3547-1 and special dimensions



Order example: **PSM-0304-03** – no minimum order quantity.

P iglidur® material S Cylindrical M Metric 03 Inner Ø d1 04 Outer Ø d2 03 Total length b1

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
3.0	+0.014 +0.054	4.5	3.0	<b>PSM-0304-03</b>
4.0	+0.020 +0.068	5.5	4.0	<b>PSM-0405-04</b>
4.0		5.5	6.0	<b>PSM-0405-06</b>
5.0	+0.025 +0.083	7.0	5.0	<b>PSM-0507-05</b>
5.0		7.0	10.0	<b>PSM-0507-10</b>
6.0	+0.032 +0.102	8.0	6.0	<b>PSM-0608-06</b>
6.0		8.0	8.0	<b>PSM-0608-08</b>
6.0	+0.040 +0.124	8.0	10.0	<b>PSM-0608-10</b>
8.0		10.0	8.0	<b>PSM-0810-08</b>
8.0	+0.032 +0.102	10.0	10.0	<b>PSM-0810-10</b>
8.0		10.0	11.5	<b>PSM-0810-11</b>
8.0	+0.025 +0.083	10.0	12.0	<b>PSM-0810-12</b>
10.0		12.0	8.0	<b>PSM-1012-08</b>
10.0	+0.032 +0.102	12.0	10.0	<b>PSM-1012-10</b>
10.0		12.0	12.0	<b>PSM-1012-12</b>
10.0	+0.032 +0.102	12.0	15.0	<b>PSM-1012-15</b>
10.0		12.0	20.0	<b>PSM-1012-20</b>
12.0	+0.032 +0.102	14.0	10.0	<b>PSM-1214-10</b>
12.0		14.0	12.0	<b>PSM-1214-12</b>
12.0	+0.032 +0.102	14.0	15.0	<b>PSM-1214-15</b>
12.0		14.0	20.0	<b>PSM-1214-20</b>
12.0	+0.032 +0.102	14.0	25.0	<b>PSM-1214-25</b>
13.0		15.0	10.0	<b>PSM-1315-10</b>
13.0	+0.032 +0.102	15.0	20.0	<b>PSM-1315-20</b>
14.0		16.0	15.0	<b>PSM-1416-15</b>
14.0	+0.032 +0.102	16.0	20.0	<b>PSM-1416-20</b>
14.0		16.0	25.0	<b>PSM-1416-25</b>
15.0	+0.032 +0.102	17.0	15.0	<b>PSM-1517-15</b>
15.0		17.0	25.0	<b>PSM-1517-25</b>

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
15.0	+0.032 +0.102	17.0	20.0	<b>PSM-1517-20</b>
15.0		17.0	25.0	<b>PSM-1517-25</b>
16.0	+0.032 +0.102	18.0	15.0	<b>PSM-1618-15</b>
16.0		18.0	20.0	<b>PSM-1618-20</b>
16.0	+0.032 +0.102	18.0	25.0	<b>PSM-1618-25</b>
16.0		18.0	42.0	<b>PSM-1618-42</b>
18.0	+0.040 +0.124	20.0	15.0	<b>PSM-1820-15</b>
18.0		20.0	20.0	<b>PSM-1820-20</b>
18.0	+0.040 +0.124	20.0	25.0	<b>PSM-1820-25</b>
18.0		20.0	33.0	<b>PSM-1820-33</b>
20.0	+0.040 +0.124	22.0	22.0	<b>PSM-2022-22</b>
20.0		22.0	30.0	<b>PSM-2022-30</b>
20.0	+0.040 +0.124	22.0	48.0	<b>PSM-2022-48</b>
20.0		22.0	51.0	<b>PSM-2022-51</b>
20.0	+0.040 +0.124	23.0	10.0	<b>PSM-2023-10</b>
20.0		23.0	15.0	<b>PSM-2023-15</b>
20.0	+0.040 +0.124	23.0	20.0	<b>PSM-2023-20</b>
20.0		23.0	25.0	<b>PSM-2023-25</b>
20.0	+0.040 +0.124	23.0	30.0	<b>PSM-2023-30</b>
22.0		24.0	42.0	<b>PSM-2224-42</b>
22.0	+0.040 +0.124	24.0	45.0	<b>PSM-2224-45</b>
22.0		25.0	15.0	<b>PSM-2225-15</b>
22.0	+0.040 +0.124	25.0	20.0	<b>PSM-2225-20</b>
22.0		25.0	25.0	<b>PSM-2225-25</b>
22.0	+0.040 +0.124	25.0	30.0	<b>PSM-2225-30</b>
22.0		25.0	45.0	<b>PSM-2225-45</b>
23.0	+0.040 +0.124	25.0	37.0	<b>PSM-2325-37</b>
23.0		25.0	58.0	<b>PSM-2325-58</b>
23.0	+0.040 +0.124	25.0	68.0	<b>PSM-2325-68</b>

<sup>3)</sup> After press-fit. Testing methods, page 61

## Product range

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
24.0	+0.040	27.0	15.0	<b>PSM-2427-15</b>
24.0		27.0	20.0	<b>PSM-2427-20</b>
24.0	+0.124	27.0	25.0	<b>PSM-2427-25</b>
24.0		27.0	30.0	<b>PSM-2427-30</b>
25.0	+0.050	28.0	15.0	<b>PSM-2528-15</b>
25.0		28.0	20.0	<b>PSM-2528-20</b>
25.0	+0.150	28.0	25.0	<b>PSM-2528-25</b>
25.0		28.0	30.0	<b>PSM-2528-30</b>
25.0	+0.050	28.0	35.0	<b>PSM-2528-35</b>
26.0		30.0	25.0	<b>PSM-2630-25</b>
28.0	+0.072	32.0	20.0	<b>PSM-2832-20</b>
28.0		32.0	25.0	<b>PSM-2832-25</b>
28.0	+0.212	32.0	30.0	<b>PSM-2832-30</b>
30.0		34.0	20.0	<b>PSM-3034-20</b>
30.0	+0.060	34.0	25.0	<b>PSM-3034-25</b>
30.0		34.0	30.0	<b>PSM-3034-30</b>
30.0	+0.180	34.0	40.0	<b>PSM-3034-40</b>
30.0		34.0	45.0	<b>PSM-3034-45</b>
32.0	+0.050	36.0	20.0	<b>PSM-3236-20</b>
32.0		36.0	30.0	<b>PSM-3236-30</b>
32.0	+0.150	36.0	40.0	<b>PSM-3236-40</b>
35.0		39.0	20.0	<b>PSM-3539-20</b>
35.0	+0.072	39.0	30.0	<b>PSM-3539-30</b>

<sup>3)</sup> After press-fit. Testing methods, page 61

d1	d1 Tolerance <sup>3)</sup>	d2	b1 h13	Part No.
[mm]		[mm]	[mm]	
35.0	+0.060	39.0	40.0	<b>PSM-3539-40</b>
35.0		39.0	50.0	<b>PSM-3539-50</b>
40.0	+0.150	44.0	20.0	<b>PSM-4044-20</b>
40.0		44.0	30.0	<b>PSM-4044-30</b>
40.0	+0.060	44.0	40.0	<b>PSM-4044-40</b>
40.0		44.0	50.0	<b>PSM-4044-50</b>
40.0	+0.180	44.0	58.0	<b>PSM-4044-58</b>
45.0		50.0	20.0	<b>PSM-4550-20</b>
45.0	+0.072	50.0	40.0	<b>PSM-4550-40</b>
45.0		50.0	50.0	<b>PSM-4550-50</b>
50.0	+0.212	55.0	20.0	<b>PSM-5055-20</b>
50.0		55.0	30.0	<b>PSM-5055-30</b>
50.0	+0.060	55.0	40.0	<b>PSM-5055-40</b>
50.0		55.0	50.0	<b>PSM-5055-50</b>
50.0	+0.180	55.0	60.0	<b>PSM-5055-60</b>
60.0		65.0	50.0	<b>PSM-6065-50</b>
60.0	+0.072	65.0	60.0	<b>PSM-6065-60</b>
65.0		70.0	50.0	<b>PSM-6570-50</b>
75.0	+0.072	80.0	80.0	<b>PSM-7580-80</b>
90.0		95.0	100.0	<b>PSM-9095-100</b>
95.0	+0.212	100.0	100.0	<b>PSM-95100-100</b>



Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



Order online

including delivery times, prices, online tools

[www.igus.eu/P](http://www.igus.eu/P)



Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

### Discount scaling


1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.

No low-quantity surcharges.

Free shipping within Germany for orders above €150.

## Flange bearings (form F)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

### Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30	Ø > 30
f1 [mm]	0.3	0.5	0.8	1.2



Dimensions according to ISO 3547-1 and special dimensions



Order example: **PFM-0405-04** – no minimum order quantity.

P iglidur® material F With flange M Metric 04 Inner Ø d1 05 Outer Ø d2 04 Total length b1

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
4.0		5.5	9.5	4.0	0.75	<b>PFM-0405-04</b>
5.0	+0.020	6.0	10.0	3.0	0.50	<b>PFM-0506-03</b>
5.0	+0.068	7.0	11.0	5.0	1.00	<b>PFM-0507-05</b>
6.0		8.0	12.0	4.0	1.00	<b>PFM-0608-04</b>
6.0		8.0	12.0	6.0	1.00	<b>PFM-0608-06</b>
6.0		8.0	12.0	8.0	1.00	<b>PFM-0608-08</b>
7.0		9.0	15.0	4.0	1.00	<b>PFM-0709-04</b>
8.0		10.0	15.0	5.5	1.00	<b>PFM-0810-05</b>
8.0	+0.025	10.0	15.0	7.5	1.00	<b>PFM-0810-07</b>
8.0	+0.083	10.0	15.0	9.5	1.00	<b>PFM-0810-09</b>
8.0		10.0	15.0	10.0	1.00	<b>PFM-0810-10</b>
8.0		10.0	12.0	10.0	1.00	<b>PFM-081012-10</b>
8.0		10.0	15.0	15.0	1.00	<b>PFM-0810-15</b>
10.0	+0.032	12.0	18.0	5.0	1.00	<b>PFM-1012-05</b>
10.0	+0.102	12.0	18.0	7.0	1.00	<b>PFM-1012-07</b>
10.0		12.0	18.0	9.0	1.00	<b>PFM-1012-09</b>
10.0	+0.025	12.0	18.0	10.0	1.00	<b>PFM-1012-10</b>
10.0	+0.083	12.0	18.0	12.0	1.00	<b>PFM-1012-12</b>
10.0		12.0	18.0	17.0	1.00	<b>PFM-1012-17</b>
12.0		14.0	20.0	7.0	1.00	<b>PFM-1214-07</b>
12.0		14.0	18.0	8.0	1.00	<b>PFM-121418-08</b>
12.0		14.0	20.0	9.0	1.00	<b>PFM-1214-09</b>
12.0	+0.032	14.0	20.0	10.0	1.00	<b>PFM-1214-10</b>
12.0	+0.102	14.0	20.0	12.0	1.00	<b>PFM-1214-12</b>
12.0		14.0	20.0	15.0	1.00	<b>PFM-1214-15</b>
12.0		14.0	20.0	17.0	1.00	<b>PFM-1214-17</b>
14.0		16.0	22.0	4.0	1.00	<b>PFM-1416-04</b>

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
14.0		16.0	22.0	8.0	1.00	<b>PFM-1416-08</b>
14.0	+0.032	16.0	22.0	12.0	1.00	<b>PFM-1416-12</b>
14.0	+0.102	16.0	22.0	17.0	1.00	<b>PFM-1416-17</b>
14.0		16.0	24.0	25.0	1.00	<b>PFM-141624-25</b>
14.0	+0.050	20.0	25.0	10.0	3.00	<b>PFM-1420-10</b>
14.0	+0.160	17.0	23.0	9.0	1.00	<b>PFM-1517-09</b>
15.0		17.0	23.0	12.0	1.00	<b>PFM-1517-12</b>
15.0		17.0	23.0	17.0	1.00	<b>PFM-1517-17</b>
15.0		17.0	23.0	22.0	1.00	<b>PFM-1517-22</b>
15.0		18.0	24.0	32.0	1.50	<b>PFM-151824-32</b>
16.0	+0.032	18.0	24.0	12.0	1.00	<b>PFM-1618-12</b>
16.0	+0.102	18.0	24.0	17.0	1.00	<b>PFM-1618-17</b>
16.0		18.0	24.0	17.0	1.00	<b>PFM-1618-17</b>
16.0		18.0	24.0	40.0	1.00	<b>PFM-161824-40</b>
17.0		19.0	25.0	25.0	1.00	<b>PFM-1719-25</b>
18.0		20.0	26.0	12.0	1.00	<b>PFM-1820-12</b>
18.0		20.0	26.0	17.0	1.00	<b>PFM-1820-17</b>
18.0		20.0	26.0	22.0	1.00	<b>PFM-1820-22</b>
20.0		23.0	30.0	11.5	1.50	<b>PFM-2023-11</b>
20.0		23.0	28.0	15.0	1.50	<b>PFM-202328-15</b>
20.0		23.0	30.0	16.5	1.50	<b>PFM-2023-16</b>
20.0		23.0	30.0	21.5	1.50	<b>PFM-2023-21</b>
20.0	+0.040	23.0	30.0	30.0	1.50	<b>PFM-2023-30</b>
20.0	+0.124	27.0	32.0	22.0	1.50	<b>PFM-2427-22</b>
24.0		28.0	35.0	11.5	1.50	<b>PFM-2528-11</b>
25.0		28.0	35.0	16.5	1.50	<b>PFM-2528-16</b>
25.0		28.0	35.0	21.5	1.50	<b>PFM-2528-21</b>
30.0		34.0	42.0	16.0	2.00	<b>PFM-3034-16</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*

## Product range

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
30.0		34.0	42.0	26.0	2.00	<b>PFM-3034-26</b>
30.0	+0.040	34.0	42.0	30.0	2.00	<b>PFM-3034-30</b>
30.0	+0.124	34.0	42.0	37.0	2.00	<b>PFM-3034-37</b>
35.0		39.0	47.0	16.0	2.00	<b>PFM-3539-16</b>
35.0	+0.050	39.0	47.0	26.0	2.00	<b>PFM-3539-26</b>
40.0	+0.150	44.0	52.0	30.0	2.00	<b>PFM-4044-30</b>
40.0		44.0	52.0	40.0	2.00	<b>PFM-4044-40</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup>	h13	h13	
45.0	+0.050	50.0	58.0	50.0	2.00	<b>PFM-4550-50</b>
50.0	+0.150	55.0	63.0	50.0	2.00	<b>PFM-5055-50</b>
60.0		65.0	73.0	40.0	2.00	<b>PFM-6065-40</b>
60.0	+0.060	65.0	73.0	50.0	2.00	<b>PFM-6065-50</b>
70.0	+0.180	75.0	83.0	50.0	2.00	<b>PFM-7075-50</b>
80.0		85.0	93.0	100.0	2.50	<b>PFM-8085-100</b>



### Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



### Order online

including delivery times, prices, online tools

[www.igus.eu/P](http://www.igus.eu/P)



### Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

### Discount scaling


1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.

No low-quantity surcharges.

Free shipping within Germany for orders above €150.



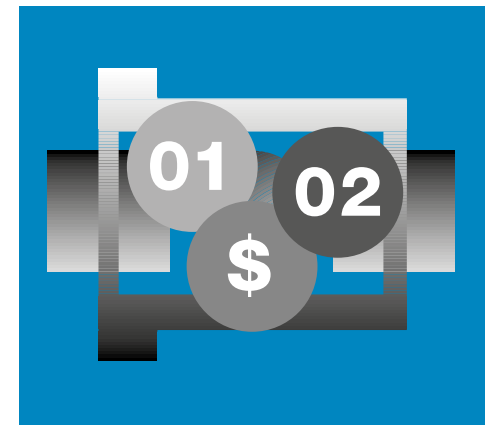

## Versatile and cost-effective

For medium temperatures and wet environments

### igidur® K



#### When to use it?

- When a cost-effective all-round plain bearing is required
- For operations in wet environments
- When good wear resistance is required at medium loads



#### When not to use it?

- When the highest wear resistance is required  
*igidur® W300*
- When high media resistance is required  
*igidur® X6*
- When a high-temperature bearing is required  
*igidur® H*

# Bearing technology | Plain bearings | iglidur® K



Ø  
6.0-20.0mm



Also available  
as:



Bar stock,  
round bar  
Page 743



Bar stock,  
plate  
Page 773



tribo-tape liner  
Page 781



Guide rings  
Page 641



Two hole  
flange  
bearings  
Page 667



Moulded  
special parts  
Page 696



igubal®  
spherical balls  
Page 993

## Versatile and cost-effective For medium temperatures and wet environments

iglidur® K is the cost-effective general purpose bearing for medium temperatures, low moisture absorption and good environmental resistance.

- Low moisture absorption
- Wear-resistant
- Cost-effective
- Lubrication-free
- Maintenance-free

### Typical application areas

- Printing industry
- Electronics industry
- Packaging
- Medical technology
- Polymer processing machines

### Descriptive technical specifications

Wear resistance at +23°C	-	<div style="width: 40%; background-color: #0070C0;"></div>	+
Wear resistance at +90°C	-	<div style="width: 30%; background-color: #0070C0;"></div>	+
Wear resistance at +150°C	-	<div style="width: 20%; background-color: #0070C0;"></div>	+
Slide property	-	<div style="width: 50%; background-color: #0070C0;"></div>	+
Wear resistance under water	-	<div style="width: 30%; background-color: #0070C0;"></div>	+
Media resistance	-	<div style="width: 40%; background-color: #0070C0;"></div>	+
Resistant to edge pressures	-	<div style="width: 40%; background-color: #0070C0;"></div>	+
Resistant to shock and impact loads	-	<div style="width: 40%; background-color: #0070C0;"></div>	+
Dirt resistance	-	<div style="width: 40%; background-color: #0070C0;"></div>	+

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)

# Technical data

General properties		Testing method	
Density	g/cm <sup>3</sup>	1.52	
Colour		yellow-beige	
Max. moisture absorption at +23°C/50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.6	
Coefficient of friction, dynamic, against steel	μ	0.06-0.21	
pv value, max. (dry)	MPa · m/s	0.30	
Mechanical properties			
Flexural modulus	MPa	3,500	DIN 53457
Flexural strength at +20°C	MPa	80	DIN 53452
Compressive strength	MPa	60	
Max. permissible surface pressure (+20°C)	MPa	50	
Shore D hardness		72	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+170	
Max. application temperature short-term	°C	+240	
Min. application temperature	°C	-40	
Thermal conductivity	W/m · K	0.25	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	3	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	> 10 <sup>12</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>12</sup>	DIN 53482

Table 01: Material properties

iglidur® K is characterised by its good wear characteristics at low moisture absorption and good thermal and mechanical specifications. This supports a very universal application spectrum.

### Moisture absorption

The moisture absorption of iglidur® K plain bearings in ambient conditions is approximately 0.1% weight. The saturation limit submerged in water is 0.6% weight. These values are so low that a moisture expansion need to be considered only in extreme cases.

### Vacuum

In vacuum, any present moisture is released as vapour. Use in vacuum is only possible with dehumidified iglidur® K bearings.

### Radiation resistance

Plain bearings made from iglidur® K are resistant up to a radiation intensity of 5 · 10<sup>2</sup> Gy.

### Resistance to weathering

iglidur® K plain bearings are resistant to weathering. The material properties are slightly affected. Discolouration occurs.

### Mechanical properties

With increasing temperatures, the compressive strength of iglidur® K plain bearings decreases. Diagram 02 shows this inverse relationship. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this.

Diagram 03 shows the elastic deformation of iglidur® K at radial loads. At the maximum recommended surface pressure of 50MPa, the deformation is less than 3%. A possible deformation could be, among others, dependant on the duty cycle of the load.

### Surface pressure, page 45



-40°C up to  
+170°C



50MPa



## Permissible surface speeds

iglidur® K has been developed for low to medium surface speeds. The maximum values shown in table 03 can only be achieved at low pressures. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, though, this level is rarely reached due to varying application conditions.

Surface speed, page 48

## Temperature

The temperatures prevailing in the bearing system also have an influence on the wear. With increasing temperatures, the wear increases and this effect is significant when temperatures rise over +100°C. For temperatures over +70°C an additional securing is required.

Application temperatures, page 53

Additional securing, page 53

## Friction and wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the surface speed and load (diagrams 04 and 05).

Coefficient of friction and surfaces, page 51

Wear resistance, page 54

## Shaft materials

The friction and wear are also dependent, to a large degree, on the mating partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglidur® K a ground surface with an average surface finish  $R_a = 0.15-0.2\mu\text{m}$  is recommended. Diagram 06 shows results of testing different shaft materials with plain bearings made from iglidur® K. It is important to notice that with increasing loads, the recommended hardness of the shaft increases. The "soft" shafts tend to wear more easily and thus increase the wear of the overall system, if the loads exceed 2MPa. The comparison of rotation and pivoting shows that the wear is almost identical at a pressure up to 5MPa. The higher the loads, the greater the difference (diagram 07).

Shaft materials, page 56

## Installation tolerances

iglidur® K plain bearings are standard bearings for shafts with h-tolerance (recommended minimum h9). The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, the inner diameter automatically adjusts to the E10 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table). In relation to the installation tolerance, the inner diameter changes with the absorption of humidity.

Testing methods, page 61

Chemicals	Resistance
Alcohols	+ up to 0
Diluted acids	0 up to -
Diluted alkalines	+
Fuels	+
Greases, oils without additives	+
Hydrocarbons	+
Strong acids	-
Strong alkalines	0

All data given at room temperature [+20°C]

Table 02: Chemical resistance

Chemical table, page 1170

	Rotating	Oscillating	linear
Long-term m/s	1.0	0.7	3.0
Short-term m/s	2.0	1.4	4.0

Table 03: Maximum surface speeds

	Dry	Greases	Oil	Water
Coefficient of friction $\mu$	0.06-0.21	0.09	0.04	0.04

Table 04: Coefficient of friction against steel ( $R_a = 1\mu\text{m}$ , 50HRC)

	Housing		Plain bearings		Shaft	
	$\text{Ø d1}$ [mm]	H7 [mm]	E10 [mm]	h9 [mm]		
0-3	+0.000	+0.010	+0.014	+0.054	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.020	+0.068	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.025	+0.083	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.032	+0.102	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.040	+0.124	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.050	+0.150	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.060	+0.180	-0.074	+0.000
> 80-120	+0.000	+0.035	+0.072	+0.212	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.085	+0.245	-0.100	+0.000

Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit

## Technical data

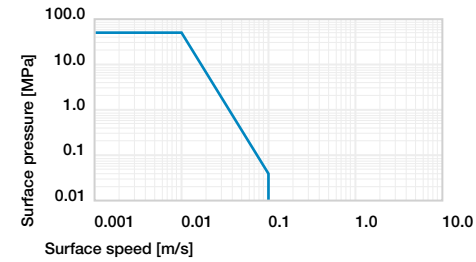


Diagram 01: Permissible pv values for iglidur® K plain bearing with a wall thickness of 1 mm dry operation against a steel shaft at +20°C, mounted in a steel housing.

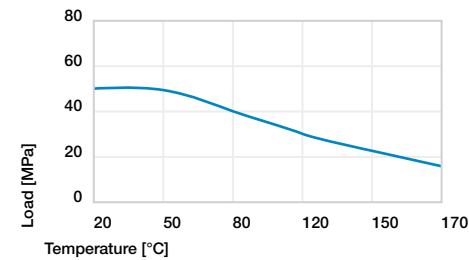


Diagram 02: Maximum recommended surface pressure as a function of temperature (50MPa at +20°C)

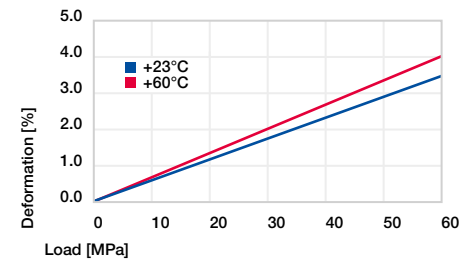


Diagram 03: Deformation under pressure and temperature

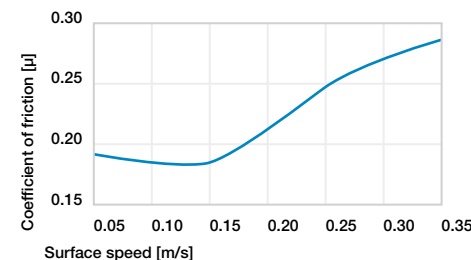


Diagram 04: Coefficient of friction as a function of the surface speed,  $p = 0.75\text{MPa}$

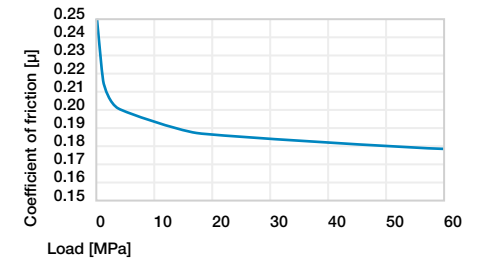


Diagram 05: Coefficient of friction as a function of the pressure,  $v = 0.01\text{m/s}$

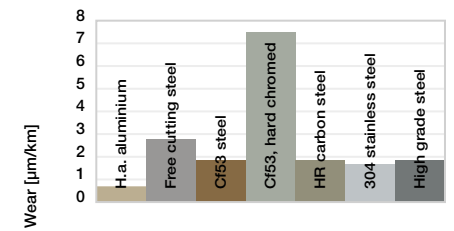


Diagram 06: Wear, rotating with different shaft materials, pressure,  $p = 1\text{MPa}$ ,  $v = 0.3\text{m/s}$


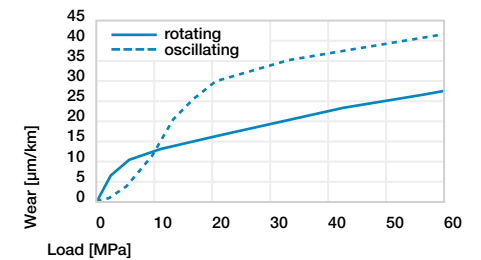


Diagram 07: Wear for oscillating and rotating applications with shaft material Cf53 hardened and ground steel, as a function of the load

## Bearing technology | Plain bearings | iglidur® K

### Sleeve bearings (form S)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

**i** Dimensions according to ISO 3547-1 and special dimensions

#### Chamfer in relation to d1

d1 [mm]	Ø 1-6	Ø 6-12	Ø 12-30
f1 [mm]	0.3	0.5	0.8



**Order example: KSM-0608-06 – no minimum order quantity.**

**K** iglidur® material **S** Cylindrical **M** Metric **06** Inner Ø d1 **08** Outer Ø d2 **06** Total length b1

d1	d1	d2	b1	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	h13 [mm]	
6.0	+0.020 +0.068	8.0	6.0	<b>KSM-0608-06</b>
8.0	+0.025 +0.083	10.0	10.0	<b>KSM-0810-10</b>
10.0		12.0	10.0	<b>KSM-1012-10</b>
12.0		14.0	12.0	<b>KSM-1214-12</b>
16.0	+0.032 +0.102	18.0	15.0	<b>KSM-1618-15</b>
20.0	+0.040 +0.124	23.0	20.0	<b>KSM-2023-20</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*



#### Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



#### Order online

including delivery times, prices, online tools

[www.igus.eu/K](http://www.igus.eu/K)



#### Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

Discount scaling		
1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999

No minimum order value.

No low-quantity surcharges.


Free shipping within Germany for orders above €150.

EN 09/2023



## Bearing technology | Plain bearings | iglidur® K

### Flange bearings (form F)



<sup>2)</sup> Thickness < 0.6mm: chamfer = 20°

**i** Dimensions according to ISO 3547-1 and special dimensions

#### Chamfer in relation to d1

d1 [mm]	Ø 6-12	Ø 12-30
f1 [mm]	0.5	0.8



**Order example: KFM-0608-06 – no minimum order quantity.**

**K** iglidur® material **F** With flange **M** Metric **06** Inner Ø d1 **08** Outer Ø d2 **06** Total length b1

d1	d1	d2	d3	b1	b2	Part No.
[mm]	Tolerance <sup>3)</sup>	[mm]	d13 <sup>3)</sup> [mm]	h13 [mm]	h13 [mm]	
6.0	+0.020 +0.068	8.0	12.0	6.0	1.00	<b>KFM-0608-06</b>
8.0	+0.025 +0.083	10.0	15.0	10.0	1.00	<b>KFM-0810-10</b>
10.0		12.0	18.0	10.0	1.00	<b>KFM-1012-10</b>
12.0		14.0	20.0	12.0	1.00	<b>KFM-1214-12</b>
16.0	+0.032 +0.102	18.0	24.0	17.0	1.00	<b>KFM-1618-17</b>
20.0	+0.040 +0.124	23.0	30.0	21.5	1.50	<b>KFM-2023-21</b>

<sup>3)</sup> After press-fit. *Testing methods, page 61*



#### Available from stock

Detailed information about delivery time online.

[www.igus.eu/24](http://www.igus.eu/24)



#### Order online

including delivery times, prices, online tools

[www.igus.eu/K](http://www.igus.eu/K)



#### Ordering note

Our prices are scaled according to order quantities, current prices can be found online.

Discount scaling		
1-9	50-99	500-999
10-24	100-199	1,000-2,499
25-49	200-499	2,500-4,999


No minimum order value.

No low-quantity surcharges.

Free shipping within Germany for orders above €150.

EN 09/2023



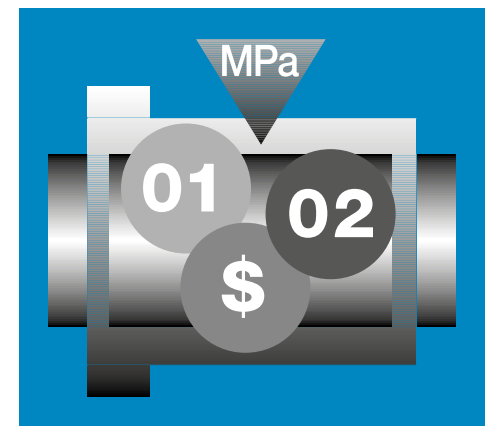

## Low-cost material for high-volume production

For applications with mainly static loads

### igidur® GLW



#### When to use it?

- When an economical universal bearing for high volumes is required
- For high, primarily static loads
- For low to medium speeds



#### When not to use it?

- When mechanical reaming of the bore is necessary  
*igidur® M250*
- For primarily dynamic loads  
*igidur® G*
- When the highest wear resistance is required  
*igidur® W300*
- When temperatures are constantly higher than +130°C  
*igidur® K*
- For underwater applications  
*igidur® H2*

## Bearing technology | Plain bearings | iglidur® GLW



∅  
-



Also available as:



Bar stock, round bar  
Page 743

### Low-cost material for high-volume production For applications with mainly static loads

iglidur® GLW plain bearings are preferred in applications with static load, where only occasional movement takes place.

- Applications with static loads
- Cost-effective
- Resistant to dirt
- Resistant to vibrations
- Lubrication-free
- Maintenance-free



Bar stock, plate  
Page 773

#### Typical application areas

- Automation
- Automotive
- Industrial handling



tribo-tape liner  
Page 781



Guide rings  
Page 641



Two hole flange bearings  
Page 667



Moulded special parts  
Page 696



igubal® spherical balls  
Page 993

Descriptive technical specifications				
Wear resistance at +23°C	-	<div style="width: 25%; background-color: #0070C0;"></div>		+
Wear resistance at +90°C	-	<div style="width: 25%; background-color: #0070C0;"></div>		+
Wear resistance at +150°C	-	<div style="width: 10%; background-color: #0070C0;"></div>		+
Slide property	-	<div style="width: 25%; background-color: #0070C0;"></div>		+
Wear resistance under water	-	<div style="width: 10%; background-color: #0070C0;"></div>		+
Media resistance	-	<div style="width: 40%; background-color: #0070C0;"></div>		+
Resistant to edge pressures	-	<div style="width: 40%; background-color: #0070C0;"></div>		+
Resistant to shock and impact loads	-	<div style="width: 60%; background-color: #0070C0;"></div>		+
Dirt resistance	-	<div style="width: 50%; background-color: #0070C0;"></div>		+

Online product finder  
[www.igus.eu/igidur-finder](http://www.igus.eu/igidur-finder)

Online service life calculation  
[www.igus.eu/igidur-expert](http://www.igus.eu/igidur-expert)



EN 09/2023

## Technical data

General properties		Testing method	
Density	g/cm <sup>3</sup>	1.36	
Colour		black	
Max. moisture absorption at +23°C/50% r.h.	% weight	1.3	DIN 53495
Max. moisture absorption	% weight	5.5	
Coefficient of friction, dynamic, against steel	μ	0.10-0.24	
pv value, max. (dry)	MPa · m/s	0.30	
Mechanical properties			
Flexural modulus	MPa	7,700	DIN 53457
Flexural strength at +20°C	MPa	235	DIN 53452
Compressive strength	MPa	74	
Max. permissible surface pressure (+20°C)	MPa	80	
Shore D hardness		78	DIN 53505
Physical and thermal properties			
Max. application temperature long-term	°C	+100	
Max. application temperature short-term	°C	+160	
Min. application temperature	°C	-40	
Thermal conductivity	W/m · K	0.24	ASTM C 177
Coefficient of thermal expansion (at +23°C)	K <sup>-1</sup> · 10 <sup>-5</sup>	17	DIN 53752
Electrical properties			
Specific transitional resistance	Ωcm	> 10 <sup>11</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>11</sup>	DIN 53482

Table 01: Material properties

With plain bearings made from iglidur® GLW, we can offer our customers an alternative to iglidur® G for high-volume production applications. Featuring similar mechanical designed as iglidur® G, iglidur® GLW plain bearings are primarily recommended for static loads. With regard to these applications, in which the dynamic properties of iglidur® G to a large extent are unimportant, iglidur® GLW presents a cost-effective alternative.

#### Moisture absorption

The moisture absorption of iglidur® GLW plain bearings in ambient conditions is approximately 1.3% weight. The saturation limit submerged in water is 5.5% weight. This must be taken into account for these types of applications.

#### Vacuum

In vacuum, any present moisture is released as vapour.

#### Radiation resistance

Plain bearings made from iglidur® GLW are resistant up to a radiation intensity of 3 · 10<sup>2</sup> Gy.

#### Resistance to weathering

iglidur® GLW plain bearings are resistant to weathering.

The material properties are slightly affected. Discolouration occurs.

#### Mechanical properties

When temperatures increase, the compressive strength of iglidur® GLW plain bearings decreases. Diagram 02 shows this inverse relationship. The maximum recommended surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this.

Diagram 03 shows the elastic deformation of iglidur® GLW as a function of radial pressure. At the recommended maximum surface pressure of 80MPa the deformation is less than 3% at room temperature. A plastic deformation can be negligible up to this value. It is however also dependent on the duty cycle of the load.

**Surface pressure, page 45**



-40°C up to +100°C



80MPa



HB



RoHS



ISO 35474

## Permissible surface speeds

iglidur® GLW has been developed for low to medium surface speeds. During continuous operation, a maximum speed of 0.8m/s (rotating) or 2.5m/s (linear) is permissible. The maximum values shown in table 03 can only be achieved at low pressures. In practice, these values are rarely reached, due to the increasing temperatures approaching or exceeding the maximum permitted value.

### Surface speed, page 48

## Temperature

The ambient temperatures strongly influence the properties of plain bearings. Diagram 02 shows this inverse relationship. The wear rises with increasing temperatures. For temperatures over +80°C an additional securing is required.

### Application temperatures, page 53

### Additional securing, page 53

## Friction and wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the surface speed and load (diagrams 04 and 05).

### Coefficient of friction and surfaces, page 51

### Wear resistance, page 54

## Shaft materials

The friction and wear are also dependent, to a large degree, on the mating partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglidur® GLW a ground surface with an average surface finish  $R_a = 0.1-0.2\mu\text{m}$  is recommended. Diagram 06 shows results of testing different shaft materials with plain bearings made from iglidur® GLW. If the shaft material you plan on using is not shown in these test results, please contact us.

### Shaft materials, page 56

## Installation tolerances

iglidur® GLW plain bearings are standard bearings for shafts with h-tolerance (recommended minimum h9). The bearings are designed for press-fit into a housing machined to a H7 tolerance. After being assembled into a nominal size housing, the inner diameter automatically adjusts to the E10 tolerances. For particular dimensions the tolerance differs depending on the wall thickness (please see product range table).

### Testing methods, page 61

## Product range

iglidur® GLW plain bearings are manufactured to special order. For high volume applications, please request iglidur® GLW plain bearings as an alternative to iglidur® G.

Chemicals	Resistance
Alcohols	+ up to 0
Diluted acids	0 up to -
Diluted alkalines	+
Fuels	+
Greases, oils without additives	+
Hydrocarbons	+
Strong acids	-
Strong alkalines	0

All data given at room temperature [+20°C]

Table 02: Chemical resistance

Chemical table, page 1170

	Rotating	Oscillating	linear
Long-term m/s	0.8	0.6	2.5
Short-term m/s	1.0	0.7	3.0

Table 03: Maximum surface speeds

	Dry	Greases	Oil	Water
Coefficient of friction $\mu$	0.10-0.24	0.09	0.04	0.04

Table 04: Coefficient of friction against steel ( $R_a = 1\mu\text{m}$ , 50HRC)

Ø d1 [mm]	Housing		Plain bearings		Shaft	
	H7 [mm]	E10 [mm]	E10 [mm]	h9 [mm]		
0-3	+0.000	+0.010	+0.014	+0.054	-0.025	+0.000
> 3-6	+0.000	+0.012	+0.020	+0.068	-0.030	+0.000
> 6-10	+0.000	+0.015	+0.025	+0.083	-0.036	+0.000
> 10-18	+0.000	+0.018	+0.032	+0.102	-0.043	+0.000
> 18-30	+0.000	+0.021	+0.040	+0.124	-0.052	+0.000
> 30-50	+0.000	+0.025	+0.050	+0.150	-0.062	+0.000
> 50-80	+0.000	+0.030	+0.060	+0.180	-0.074	+0.000
> 80-120	+0.000	+0.035	+0.072	+0.212	-0.087	+0.000
> 120-180	+0.000	+0.040	+0.085	+0.245	-0.100	+0.000

Table 05: Important tolerances for plain bearings according to ISO 3547-1 after press-fit

## Technical data

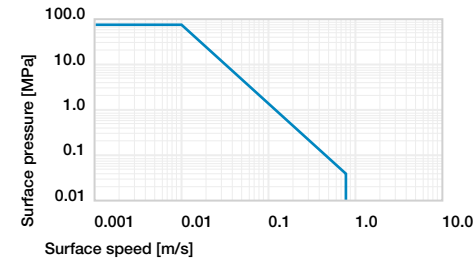


Diagram 01: Permissible pv values for iglidur® GLW with a wall thickness of 1mm dry operation against a steel shaft at +20°C, mounted in a steel housing

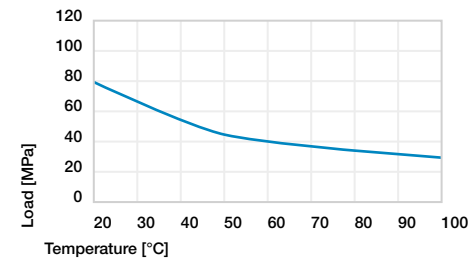


Diagram 02: Maximum recommended surface pressure as a function of temperature (80MPa at +20°C)

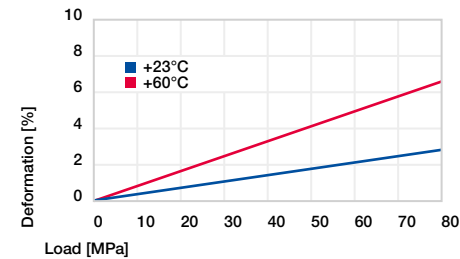


Diagram 03: Deformation under pressure and temperature

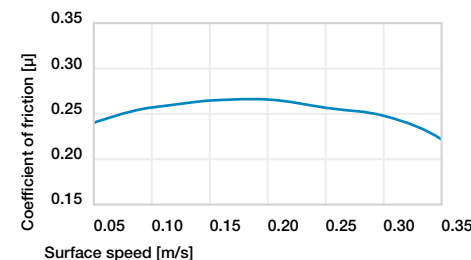


Diagram 04: Coefficient of friction as a function of the surface speed,  $p = 0.75\text{MPa}$

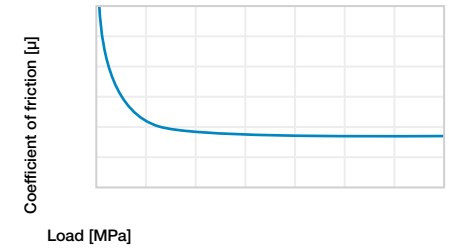


Diagram 05: Coefficient of friction as a function of the pressure,  $v = 0.01\text{m/s}$

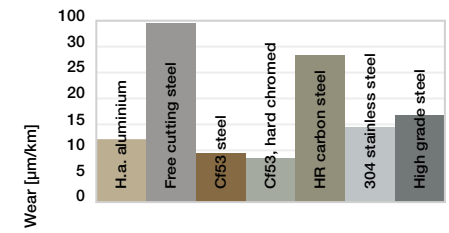


Diagram 06: Wear, rotating with different shaft materials, pressure,  $p = 1\text{MPa}$ ,  $v = 0.3\text{m/s}$

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Other Tools](#) category:*

*Click to view products by [Iigus](#) manufacturer:*

Other Similar products are found below :

[899-2-KT46](#) [CR-0AFL4--332K](#) [568681-1](#) [5800-0090](#) [58061-1](#) [59085](#) [00-8273-RDPP](#) [593033](#) [593072](#) [593564100](#) [593575](#) [593593](#) [010-0003-0000](#) [011349-000](#) [CRCW08052740FRT1](#) [LUC-012S070DSM](#) [LUC-018S070DSP](#) [LUC-024S105DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [CRCW2010331JR02](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [603-JJ-07-FP](#) [603-JJY-04](#) [CRTN1013](#) [CS16](#) [6-1579014-0](#) [62036240-1](#) [M43435 TY 1 SZ 3 FIN B BLK](#) [M43435 TY 2 SZ 3 FIN C BLK](#) [M43435 TY 5 SZ 3 FIN C NAT](#) [M-5Z](#) [M6816](#) [660-29ABT1](#) [662508-1](#) [CVHD-950X-93.333](#) [CW104-01X](#) [671-GP-04-KT39-73207](#) [CW307-01A](#) [CW30901A](#) [CW6211201A](#) [690191-1](#) [690191-3](#) [690317-2](#) [691409-4](#)