


SpectraEDGE SDES, SDEC ranges



SpectraEDGE

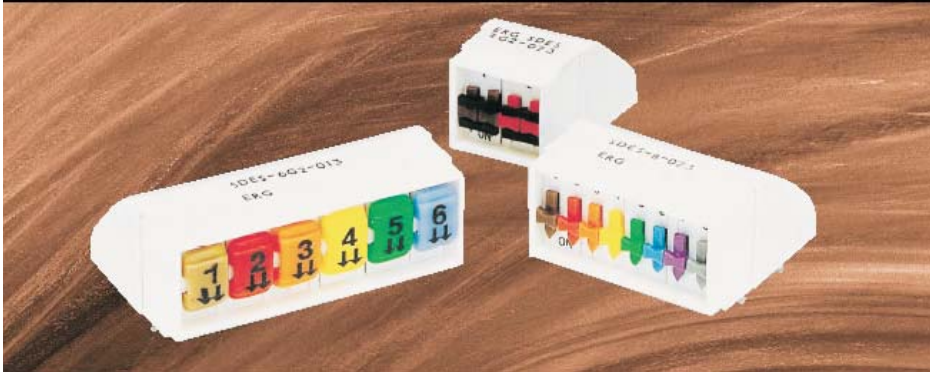


This is the switch for 'through panel' mounting, where the user is expected to set the codes, or in live card access applications.

- Fully enclosed SDES series is on 0.300" mounting centres.
- Allows for through panel mounting from the edge of the PCB
- 1µm hard gold plated wiping contact gives high reliability in low level circuits.
- Base and tape sealed for flow soldering and solvent/aqueous washing.
- If you have a volume requirement for a product variant not shown on this sheet, please contact us.


SpectraEDGE ON/OFF s.p.s.t. SDES 013 & 23 series

Number of s.p.d.t.	Part Nos SDES-plus suffix	Length 'A' mm max	Length 'B' mm max
2	2-023	7.5	6.7
4	4-023	12.6	11.8
6	6-023	17.6	16.8
8	8-023	22.7	21.9
10	10-023	27.8	27.0
12	12-023	32.9	32.1
14	14-023	38.0	37.2
16	16-023	43.0	42.2

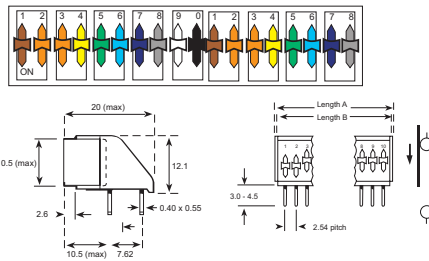


SpectraEDGE ON/OFF d.p.s.t. SDES-G 013 & 023 series

Number of d.p.d.t.	Part Nos SDES-plus suffix	Length 'A' mm max	Length 'B' mm max
1	1G2-023	7.5	6.7
2	2G2-023	12.6	11.8
4	4G2-023	22.7	21.9
6	6G2-023	32.9	32.1

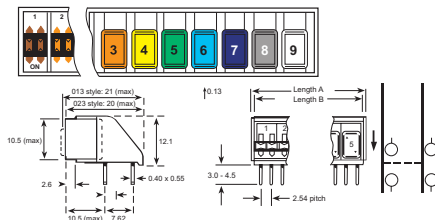

SpectraEDGE GANGEOVER s.p.d.t. SDEC 013 & 023 series

Number of s.p.d.t.	Part Nos SDEC-plus suffix	Length 'A' mm max	Length 'B' mm max
1	1-023	7.5	6.7
2	2-023	12.6	11.8
4	4-023	22.7	21.9

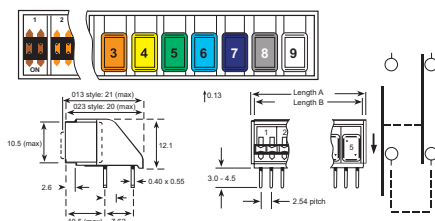

Principal Electrical and Performance Data

at 20°C 70% R.H.

Contact Ratings: Non Switching: 100Vac, 5A
Switching: 1µV to 100V, 1µA to 1A up to 10VA.

Initial Contact Resistance: (at 10mV, 10mA max.)
Typical: 10mΩ . Max. 20mΩ .

Insulation Resistance: (at 500Vdc min.) 10,000MΩ .

Life: For the first 1000 closures the standard deviation of the change in resistance from the mean is usually less than 1mΩ . Mechanical wear out of the sliding actuator is usually observed after 10,000 operations.

Dielectric Strength: 1 minute: 500Vrms 50Hz.

Capacitance Between Open Contacts: < 1pf at 1KHz.
Temperature: Operating range for continuous electrical use and manual operation is restricted to -55°C to +100°C for standard products.

Humidity: BS 2011 Test Ca: 56 days.

Soldering: solderability: < 2 seconds to wet at 235°C as per IEC 68 and BS 2011 Test T, solder bath method.

Resistance to soldering heat as per IEC 68 and BS 2011 10 seconds satisfactory at 260°C when mounted on 1.5mm PCB.

Please note: BS 2011 is now superseded by BS EN 60068.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Directional Switches](#) category:

Click to view products by [Illinois Tool Works](#) manufacturer:

Other Similar products are found below :

[SRBE210100](#) [T4-TCJ3332](#) [T5-NH1118](#) [RKJXW1014002](#) [T4-TCK3312](#) [MJTP1140AAUTR](#) [MJTP1138DTB](#) [3J2115-200N](#) [T2-0018](#) [T2-MC2112](#) [T5-CK2212](#) [PHAP4383V](#) [3J2015-200N](#) [CS41001E](#) [EVQ-Q3AA15](#) [SRBD170401](#) [T4-0010](#) [1.20.126.514/0000](#) [5D001-BKKKKKAWXWXWXWX-W200](#) [SRBD150201](#) [T8-CM111N](#) [T4-CN211N](#) [T4-CD2212](#) [T1-CB2112](#) [RKJXK122000D](#) [RKJXK122400Y](#) [RKJXL100401V](#) [RKJXM2E13001](#) [RKJXM2E13004](#) [RKJXS1004001](#) [RKJXT1F42001](#) [RKJXV1224005](#) [RKJXY100000A](#) [SKRHAAE010](#) [SKRHABE010](#) [SKRHACE010](#) [SKRHADE010](#) [SKSDPCE010](#) [SKSKPBE010](#) [SLLB120100](#) [SLLB120300](#) [SLLB310500](#) [SLLB510100](#) [SLLB510200](#) [SLLB520100](#) [SLLQ110100](#) [SLLQ120100](#) [SPVT110102](#) [SPVT210101](#) [SRBD110401](#)