


LIGHT PIPE PREPARATION/INSTALLATION:

2.2
[.09"]

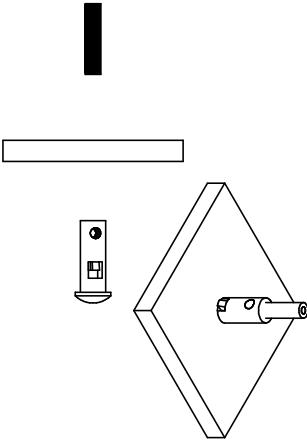

LIGHT PIPE PREPARATION/INSTALLATION:

A	Initial release	11/12/2008	BB	RD
B	Redrew, fixed diameter of mounting hole	0065	2/9/2010	BB

Panel Thickness
3.0±.1
[.118"±.004]

11.6
[46"]

5.0
[.20"]

1.5
[.06"]

2.0
[.08"]

Ø3.55
[Ø1.40"]

NOTES:

- NOTES:
 - 1. ROHS COMPLIANT
 - 2. UL 94V-2 FLAMMABILITY RATING
 - 3. -40°C TO 85°C OPERATING TEMPERATURE
 - 4. SUITABLE FOR LIGHT PIPE WITH Ø2.2mm JACKET AND OPTICAL CORE NO GREATER THAN Ø1.5mm

MOUNTING HOLES

בְּרִיאָה בְּרִיאָה בְּרִיאָה בְּרִיאָה בְּרִיאָה

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for industrial fiberoptics manufacturer:

Other Similar products are found below :

[IF-527](#) [51 0470](#) [510054](#) [51 0420](#) [IF-E92B](#) [IF-FC1](#) [IF 635-22-5](#) [IF 101D-0-30](#) [IF-562](#) [IF-PM](#) [IF-E22](#) [IF-E92A](#) [IF-D98](#) [51 0410](#) [IF-D95OC](#)

[IF-D97](#) [IF-E98](#) [IF-D92](#) [IF-E97](#) [IF-E99B](#) [IF-E93](#) [IF-E96E](#)