

**SCHOTTKY RECTIFIER  
HIGH EFFICIENCY SERIES**

**16 Amp. 60V**


**Major Ratings and Characteristics**

Characteristics	16SYQ060C	Units
$I_{F(AV)}$	16	A
$V_{RRM}$	60	V
$I_{FSM}$ @ $t_p = 8.3ms$ half-sine	250	A
$V_F$ @ $I_F = 16Apk, T_J = 125^\circ C$	0.63	V
$T_J, T_{STG}$ Operating and storage	-55 to 150	$^\circ C$

**Description/Features**

The 16SYQ060C Schottky rectifier has been expressly designed to meet the rigorous requirements of hirel environments. It is packaged in the hermetic isolated TO-257AA ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Ceramic Eyelets
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Lightweight

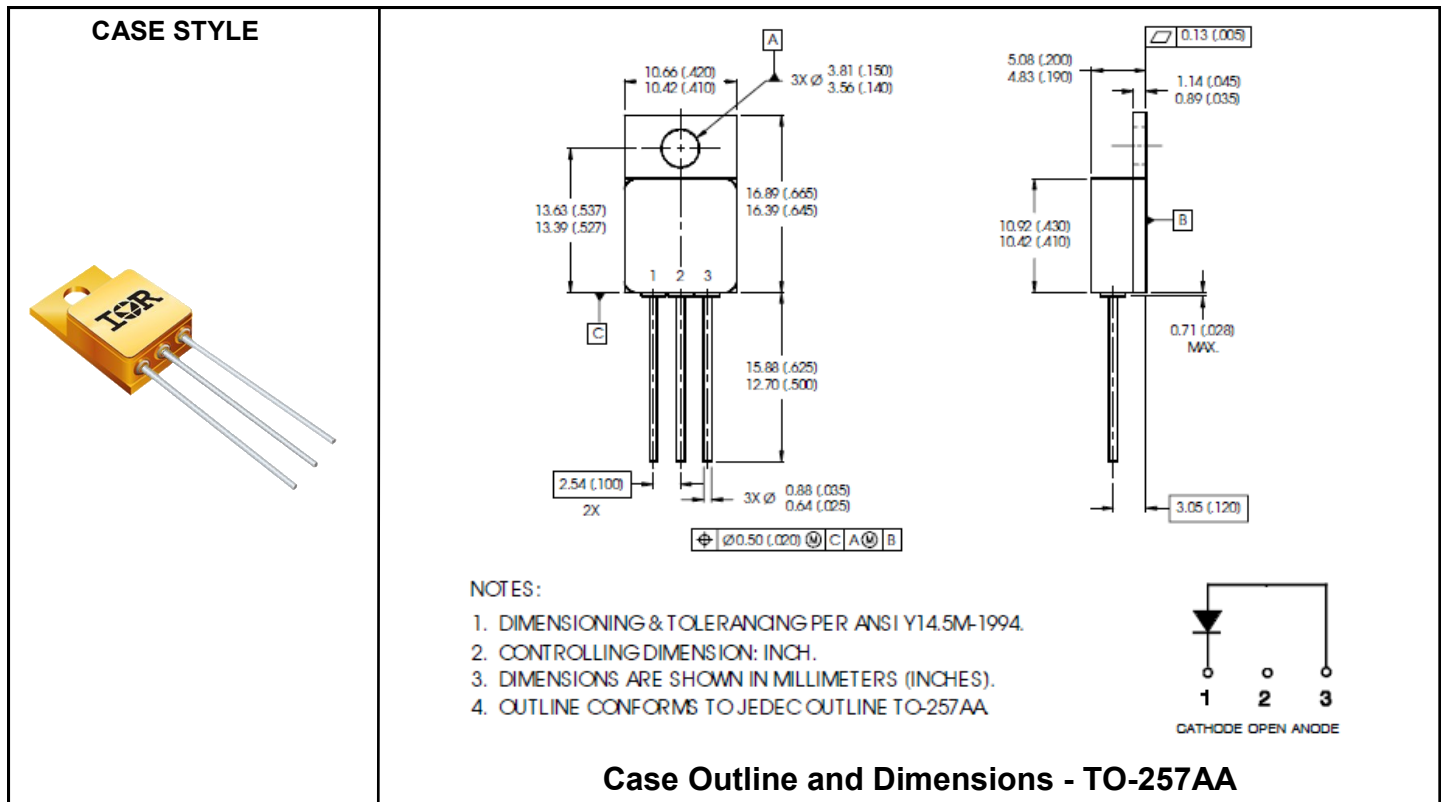

## Voltage Ratings

Part Number	16SYQ060C
V <sub>R</sub> DC Reverse Voltage (V), maximum	60
V <sub>RRM</sub> Working Peak Reverse Voltage (V), maximum	

## Absolute Maximum Ratings

Parameter	Limits	Units	Conditions
I <sub>F(AV)</sub> Maximum Average Forward Current See Fig. 5	16	A	50% duty cycle @ T <sub>C</sub> = 125°C, square waveform
I <sub>FSM</sub> Maximum Peak One Cycle Non - Repetitive Surge Current	250	A	t <sub>p</sub> = 8.3 ms half-sine


## Electrical Specifications

Parameter	Limits	Units	Conditions	
V <sub>FM</sub> Maximum Forward Voltage Drop See Fig. 1 ①	0.66	V	I <sub>F</sub> = 16A	T <sub>J</sub> = -55°C
	0.87	V	I <sub>F</sub> = 32A	
	0.65	V	I <sub>F</sub> = 16A	T <sub>J</sub> = 25°C
	0.94	V	I <sub>F</sub> = 32A	
	0.63	V	I <sub>F</sub> = 16A	T <sub>J</sub> = 125°C
	1.04	V	I <sub>F</sub> = 32A	
I <sub>RM</sub> Maximum Reverse Leakage Current See Fig. 2 ①	0.5	mA	T <sub>J</sub> = 25°C	V <sub>R</sub> = rated V <sub>R</sub>
	50	mA	T <sub>J</sub> = 100°C	
	275	mA	T <sub>J</sub> = 125°C	
C <sub>J</sub> Maximum Junction Capacitance	2100	pF	V <sub>R</sub> = 5V <sub>DC</sub> (1MHz, 25°C)	
L <sub>S</sub> Typical Series Inductance	9.8	nH	Measured from anode lead to cathode lead 6mm ( 0.025 in.) from package	


## Thermal-Mechanical Specifications

Parameter	Limits	Units	Conditions
T <sub>J</sub> Maximum Junction Temperature Range	-55 to 150	°C	
T <sub>stg</sub> Maximum Storage Temperature Range	-55 to 150	°C	
R <sub>thJC</sub> Maximum Thermal Resistance, Junction to Case	1.15	°C/W	DC operation See Fig. 4
Wt Weight, typical	4.3	g	
Die Size (Typical)	200 X 200	mils	
Case Style	T0-257AA		


① Pulse Width < 300μs, Duty Cycle < 2%.

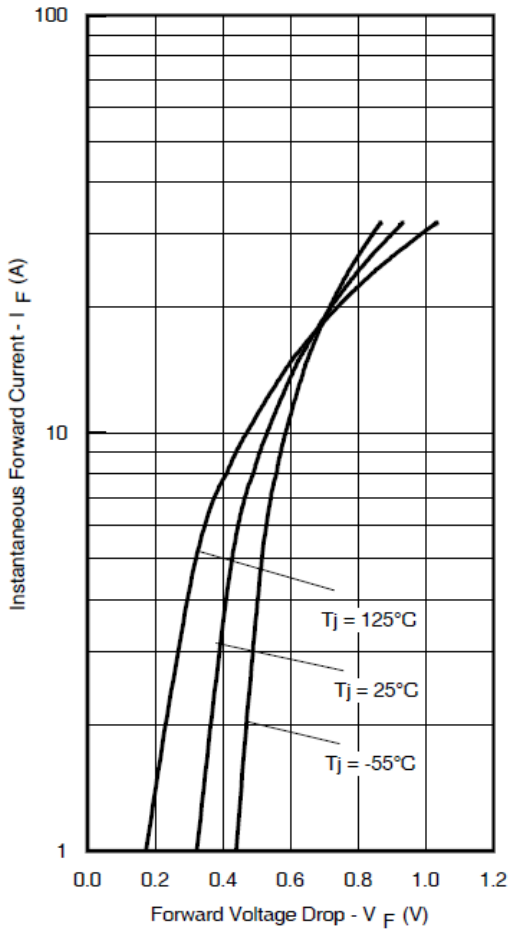


**Fig 1.** Max. Forward Voltage Drop Characteristics

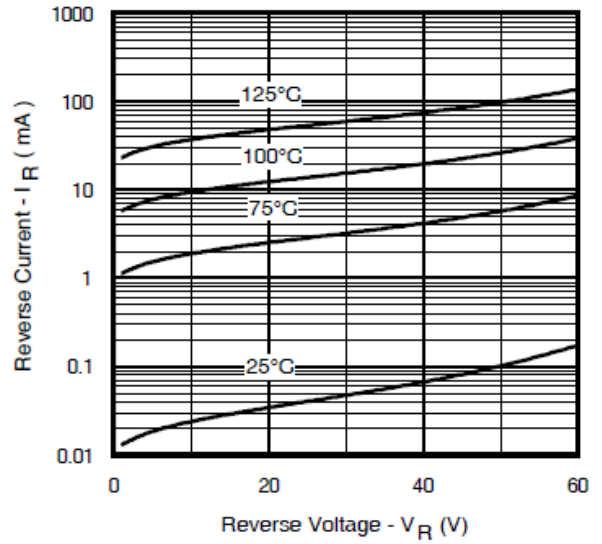


**Fig 2.** Typical Values of Reverse Current Vs. Reverse Voltage

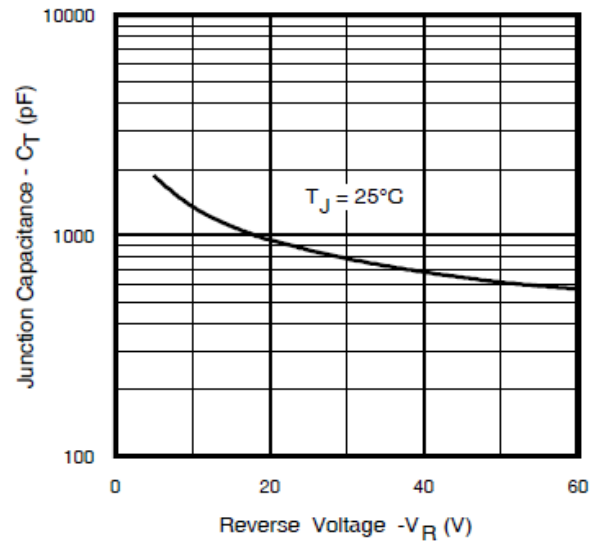

**Fig 3.** Typical Junction Capacitance Vs. Reverse Voltage

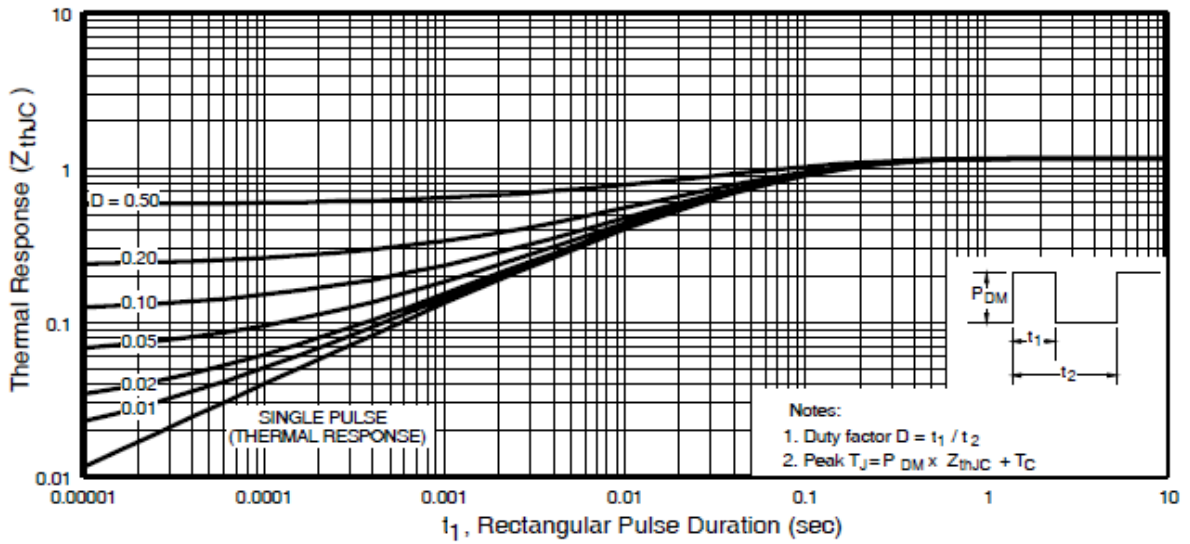

**Fig 4.** Max. Thermal Impedance  $Z_{thJC}$  Characteristics

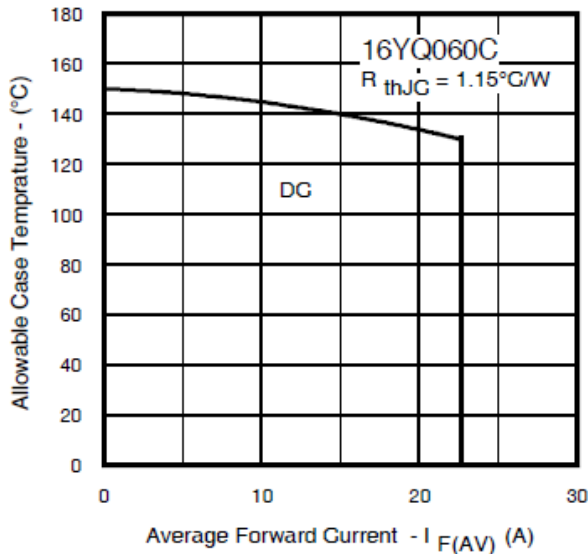

**Fig 5.** Max. Allowable Case Temperature Vs. Average Forward Current

### **IMPORTANT NOTICE**

The information given in this document shall be in no event regarded as guarantee of conditions or characteristic. The data contained herein is a characterization of the component based on internal standards and is intended to demonstrate and provide guidance for typical part performance. It will require further evaluation, qualification and analysis to determine suitability in the application environment to confirm compliance to your system requirements.

With respect to any example hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind including without limitation warranties on non- infringement of intellectual property rights and any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's product and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of any customer's technical departments to evaluate the suitability of the product for the intended applications and the completeness of the product information given in this document with respect to applications.

For further information on the product, technology, delivery terms and conditions and prices, please contact your local sales representative or go to ([www.infineon.com/hirel](http://www.infineon.com/hirel)).

### **WARNING**

Due to technical requirements products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [infineon](#) manufacturer:*

Other Similar products are found below :

[TLE6209R](#) [EVALM113023645ATOBO1](#) [EVALM11302TOBO1](#) [FD1000R33HE3-K](#) [FD300R06KE3](#) [FF1200R17KE3\\_B2](#)  
[FF300R06KE3HOSA1](#) [FF600R12ME4P](#) [FF600R17ME4\\_B11](#) [FP25R12KT4\\_B11](#) [FS600R07A2E3\\_B31](#) [FZ1600R17HP4\\_B2](#)  
[FZ1800R17KF4](#) [FZ2400R17HE4\\_B9](#) [FZ600R65KE3](#) [DD261N22K](#) [DF1000R17IE4](#) [AUIRL1404ZS](#) [BAS 40-04 E6327](#)  
[BAS4007WH6327XTSA1](#) [BAS 70-04 E6327](#) [BAS 70-06 E6327](#) [BAT15099E6327HTSA1](#) [BAT 165 E6327](#) [BAT 60A E6327](#) [BAT 60B](#)  
[E6327](#) [BC 817SU E6327](#) [BC 817U E6327](#) [BC 817UPN E6327](#) [BC 846PN H6327](#) [BC 846UPN E6327](#) [BC 847PN H6327](#) [BCM 856S H6327](#)  
[BCP5416H6327XTSA1](#) [BCP55H6327XTSA1](#) [BCP5616H6327XTSA1](#) [BCR 108 E6327](#) [BCR 10PN H6327](#) [BCR 133W H6327](#) [BCR 141](#)  
[E6327](#) [BCR 141S H6327](#) [BCR 141W H6327](#) [BCR 162 E6327](#) [BCR 183W H6327](#) [BCR 185S H6327](#) [BCR 192 E6327](#) [BCR 198 E6327](#) [BCR](#)  
[35PN H6327](#) [BCR 523U E6327](#) [BCR 533 E6327](#)