

International  
**IR** Rectifier

SCHOTTKY RECTIFIER  
HIGH EFFICIENCY SERIES

PD-94085D

30CLJQ100  
JANS1N6843CCU3  
JANTX1N6843CCU3  
JANTXV1N6843CCU3

30 Amp, 100V  
Ref: MIL-PRF-19500/681


#### Major Ratings and Characteristics

Characteristics	1N6843CCU3	Units
I <sub>F(AV)</sub>	30	A
V <sub>RRM</sub> (Per Leg)	100	V
I <sub>FSM</sub> @ t <sub>p</sub> = 8.3ms half-sine (Per Leg)	100	A
V <sub>F</sub> @ 30Apk, T <sub>J</sub> = 125°C (Per Leg)	0.95	V
T <sub>J</sub> , T <sub>stg</sub> Operating and storage	-65 to 150	°C

#### Description/Features

The 1N6843CCU3 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of high reliability environments. It is packaged in the hermetic surface mount SMD-0.5 ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Center Tap
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Surface Mount
- Lightweight
- ESD Rating: Class NS per MIL-STD-750, Method 1020

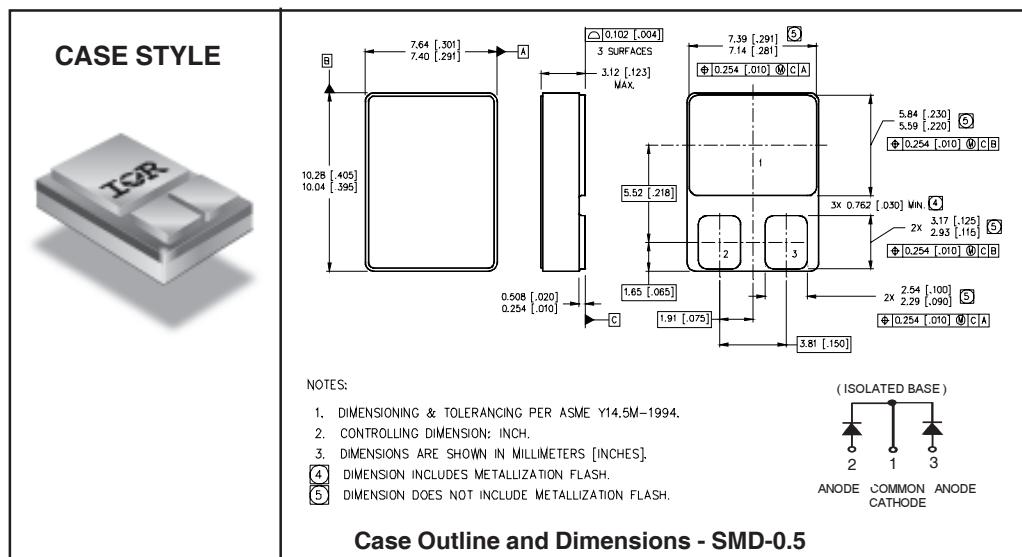

**Voltage Ratings**

Part number	1N6843CCU3		
$V_R$ Max. DC Reverse Voltage (V) (Per Leg)	100		
$V_{RWM}$ Max. Working Peak Reverse Voltage (V) (Per Leg)			

**Absolute Maximum Ratings**

Parameters	Limits	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Package) See Fig. 5	30	A	50% duty cycle @ $T_C = 83^\circ\text{C}$ , square waveform
$I_{FSM}$ Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	100	A	@ $t_p = 8.3 \text{ ms}$ half-sine

**Electrical Specifications**

Parameters	Limits	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (Per Leg) See Fig. 1①	0.86	V	$T_J = -55^\circ\text{C}$
	1.18	V	
	1.43	V	
	0.77	V	
	1.03	V	$T_J = 25^\circ\text{C}$
	1.27	V	
	0.60	V	
	0.77	V	
$I_{RM}$ Max. Reverse Leakage Current (Per Leg) See Fig. 2②	0.95	V	$T_J = 125^\circ\text{C}$
	0.01	mA	
	1.19	mA	
$C_T$ Max. Junction Capacitance (Per Leg)	5.0	mA	$V_R = \text{rated } V_R$
	275	pF	
$L_S$ Typical Series Inductance (Per Leg)	4.8	nH	Measured from center of cathode pad to center of anode pad

**Thermal-Mechanical Specifications**

Parameters	Limits	Units	Conditions
$T_J$ Max.Junction Temperature Range	-65 to 150	°C	
$T_{stg}$ Max. Storage Temperature Range	-65 to 150	°C	
$R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Leg)	3.5	°C/W	DCoperation See Fig. 4
$R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Package)	1.75	°C/W	DCoperation
wt Weight (Typical)	1.0	g	
Die Size (Typical)	70X92	mils	
Case Style	SMD-0.5		

① Pulse Width &lt; 300μs, Duty Cycle &lt; 2%

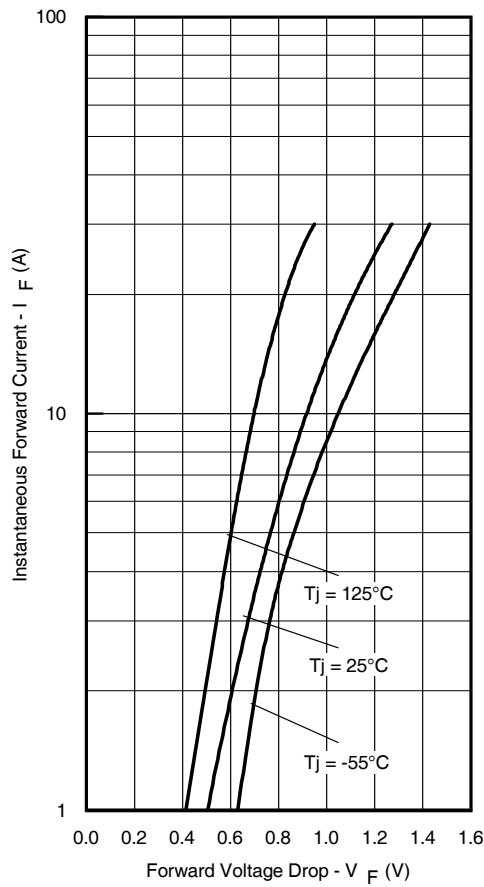


Fig. 1 - Max. Forward Voltage Drop Characteristics  
 (Per Leg)

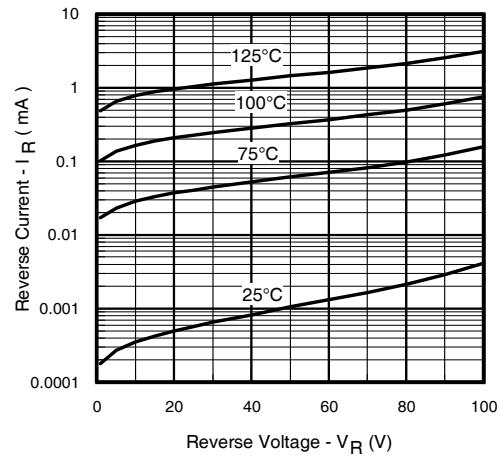


Fig. 2 - Typical Values of Reverse Current  
 Vs. Reverse Voltage (Per Leg)

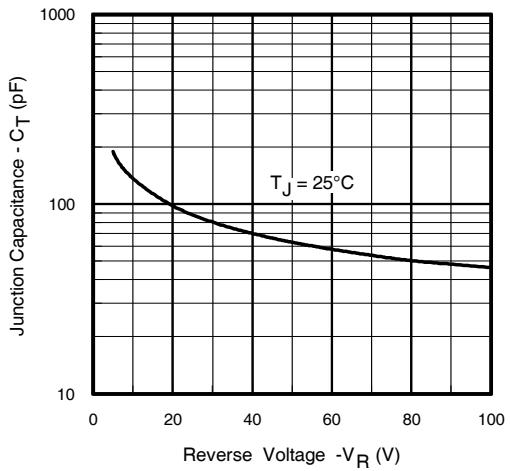
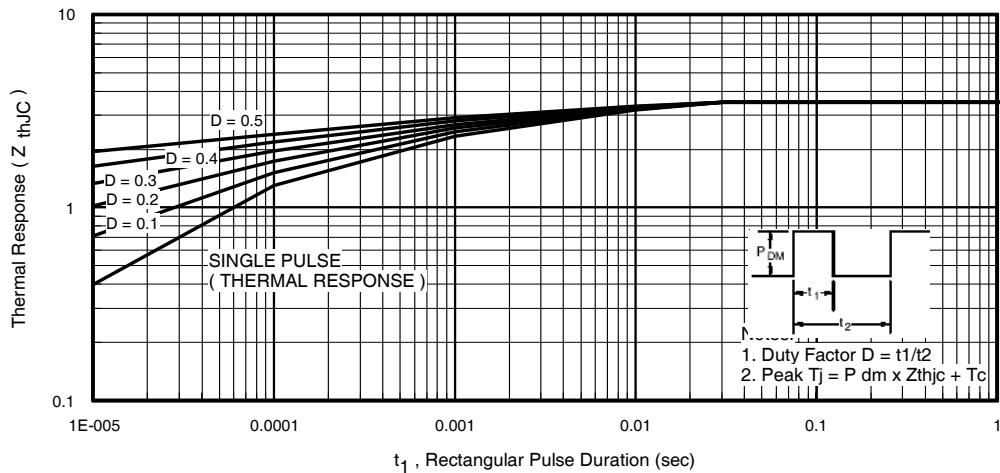
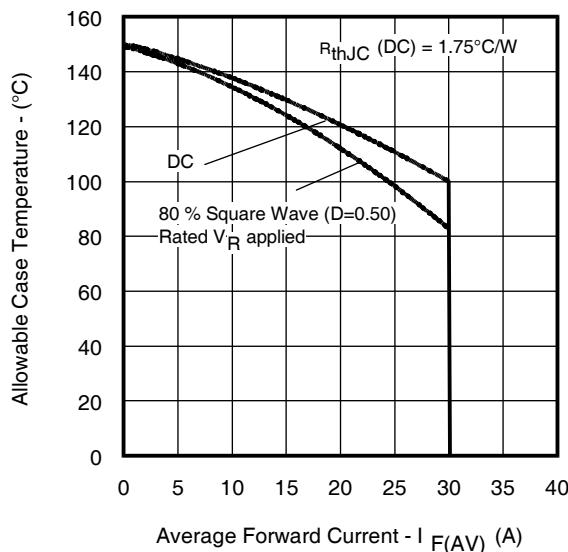


Fig. 3 - Typical Junction Capacitance Vs.  
 Reverse Voltage (Per Leg)

Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)Fig. 5 - Max. Allowable Case Temperature Vs.  
Average Forward Current (Per Package)

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

**IR LEOMINSTER :** 205 Crawford St., Leominster, Massachusetts 01453, USA Tel: (978) 534-5776

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.

*Data and specifications subject to change without notice. 10/2012*

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for infineon manufacturer:***

Other Similar products are found below :

[TLE6209R](#) [EVALM113023645ATOBO1](#) [EVALM11302TOBO1](#) [FD1000R33HE3-K](#) [FD300R06KE3](#) [FF1200R17KE3\\_B2](#)  
[FF300R06KE3HOSA1](#) [FF600R12ME4P](#) [FF600R17ME4\\_B11](#) [FP25R12KT4\\_B11](#) [FS600R07A2E3\\_B31](#) [FZ1600R17HP4\\_B2](#)  
[FZ1800R17KF4](#) [FZ2400R17HE4\\_B9](#) [FZ600R65KE3](#) [DD261N22K](#) [DF1000R17IE4](#) [AUIRL1404ZS](#) [BAS 40-04 E6327](#)  
[BAS4007WH6327XTSA1](#) [BAS 70-04 E6327](#) [BAS 70-06 E6327](#) [BAT15099E6327HTSA1](#) [BAT 165 E6327](#) [BAT 60A E6327](#) [BAT 60B E6327](#) [BC 817SU E6327](#) [BC 817U E6327](#) [BC 817UPN E6327](#) [BC 846PN H6327](#) [BC 846UPN E6327](#) [BC 847PN H6327](#) [BCM 856S H6327](#)  
[BCP5416H6327XTSA1](#) [BCP55H6327XTSA1](#) [BCP5616H6327XTSA1](#) [BCR 108 E6327](#) [BCR 10PN H6327](#) [BCR 133W H6327](#) [BCR 141 E6327](#) [BCR 141S H6327](#) [BCR 141W H6327](#) [BCR 162 E6327](#) [BCR 183W H6327](#) [BCR 185S H6327](#) [BCR 192 E6327](#) [BCR 198 E6327](#) [BCR 35PN H6327](#) [BCR 523U E6327](#) [BCR 533 E6327](#)