


Silicon Variable Capacitance Diode

- For VHF TV / VTR tuners
- Pb-free (RoHS compliant) package



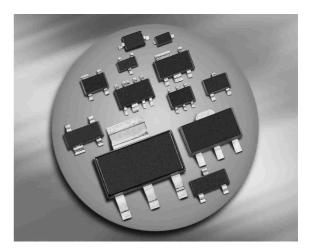

BB640



| Туре | Package | Configuration | L _S (nH) | Marking |
|-------|---------|---------------|---------------------|---------|
| BB640 | SOD323 | single | 1.8 | red S |

Maximum Ratings at $T_A = 25^{\circ}$ C, unless otherwise specified

| Parameter | Symbol | Value | Unit | |
|---------------------------------|------------------|---------|------|--|
| Diode reverse voltage | V _R | | V | |
| Peak reverse voltage | V _{RM} | 35 | | |
| ($R \ge 5 \mathrm{k} \Omega$) | | | | |
| Forward current | I _F | 20 | mA | |
| Operating temperature range | T _{op} | -55 150 | °C | |
| Storage temperature | T _{stg} | -55 150 | | |



| Parameter | Symbol | Values | | | Unit |
|---|-----------------------------------|--------|------|------|------|
| | | min. | typ. | max. |] |
| DC Characteristics | | | | | |
| Reverse current | I _R | | | | nA |
| <i>V</i> _R = 30 V | | - | - | 10 | |
| <i>V</i> _R = 30 V, <i>T</i> _A = 85 °C | | - | - | 200 | |
| AC Characteristics | | | | | |
| Diode capacitance | CT | | | | pF |
| V _R = 1 V, <i>f</i> = 1 MHz | | 62 | 69 | 76 | |
| V _R = 2 V, <i>f</i> = 1 MHz | | 47.5 | 54.5 | 61.5 | |
| V _R = 25 V, <i>f</i> = 1 MHz | | 2.85 | 3.28 | 3.7 | |
| V _R = 28 V, <i>f</i> = 1 MHz | | 2.8 | 3.05 | 3.3 | |
| Capacitance ratio | C _{T1} /C _{T28} | 19.5 | - | 25 | |
| V _R = 1 V, V _R = 28 V, <i>f</i> = 1 MHz | | | | | |
| Capacitance ratio | C _{T2} /C _{T25} | 15 | 16.6 | - | |
| V _R = 2 V, V _R = 25 V, <i>f</i> = 1 MHz | | | | | |
| Capacitance matching ¹⁾ | $\Delta C_{T}/C_{T}$ | - | - | 2.5 | % |
| $V_{\rm R}$ = 1 V, $V_{\rm R}$ = 28 V, f = 1 MHz | | | | | |
| Series resistance | r _S | - | 1.15 | - | Ω |
| C _T = 12 pF, <i>f</i> = 100 MHz | | | | | |

Electrical Characteristics at $T_A = 25^{\circ}$ C, unless otherwise specified


¹For details please refer to Application Note 047.



BB640...


Diode capacitance $C_{T} = f(V_{R})$

f = 1 MHz

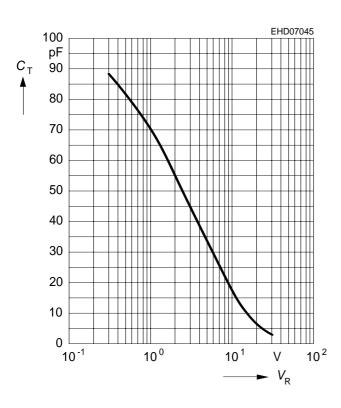


Temperature coefficient of the diode


capacitance $T_{Cc} = f(V_R)$

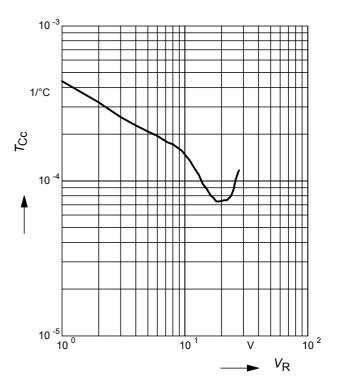


Reverse current $I_R = f(T_A)$ $V_R = 28V$

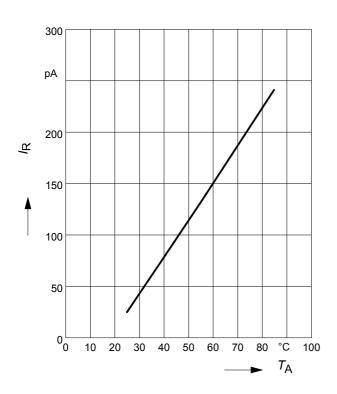

Reverse current $I_{R} = f(V_{R})$ T_{A} = Parameter

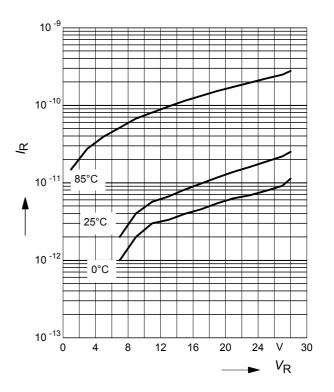



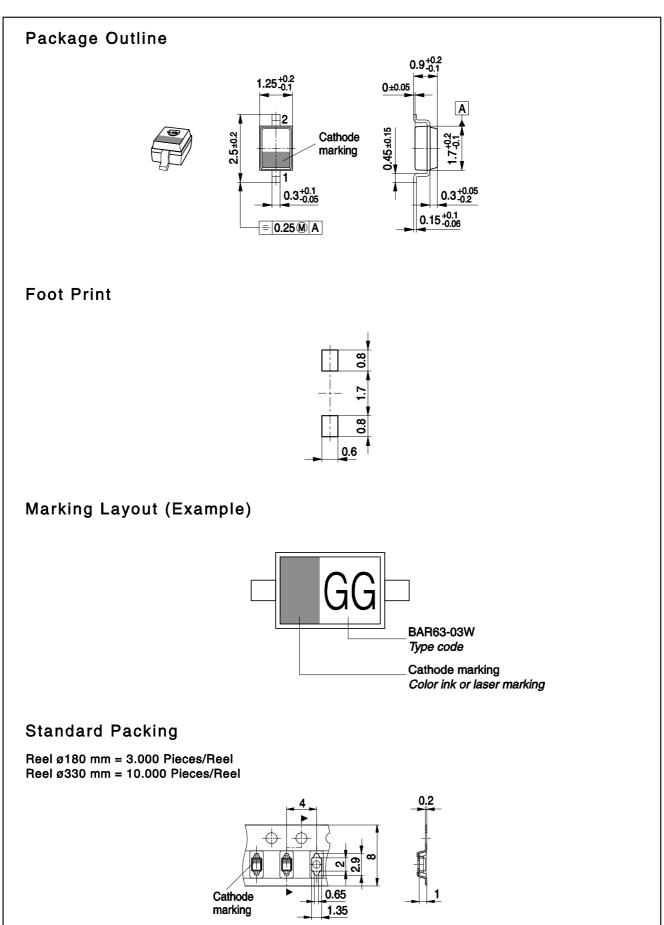



Edition 2009-11-16

Published by Infineon Technologies AG 81726 Munich, Germany

© 2009 Infineon Technologies AG All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (<<u>www.infineon.com</u>>).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Varactor Diodes category:

Click to view products by Infineon manufacturer:

Other Similar products are found below :

MA46H201-1056 MAVR-001330-12790T MVAM108 SVC704-TL-E SVC710-TL-E 1SV324TPH3F MAVR-000083-0287AT MAVR-044769-12790T SVC203C-AA-TB-E SVC270-TL-E RKV501KJ#R1 RKV606KL#R1 HVL375CKRF-E MA46H204-1056 MA46H202-1088 MA46H202-1056 MA46H203-1088 MA46H203-1056 MA46H120 MA46H070-1056 1SV229(TPH3,F) 1SV282(TPH3,F) SMV1275-079LF SVC272-TL-E GC2510-17 MAVR-001350-12790T MAVR-000120-14110P SMV1251-040LF KVX2301-23-0 KVX3901A-23-4 KVX2162-23-0 KVX1501-23-0 KVX2132-23-0 KVX38S2-23-0 GCX1204-23-0 KVX3901A-23-0 MPV1965-206 KVX2122-23-0 MPV2100-206 KVX2001-23-0 BB172X BB187LX,315 BB535E7904HTSA1 BBY5303WE6327HTSA1 1SV305,L3F 1SV270TPH3F 1SV239TPH3F 1SV281(TPH3,F) BB814E6327GR1HTSA1 BB535E7904XT