


## Silicon Tuning Diodes

- Extended frequency range up to 2.5 GHz; spezial design for use in TV-sat tuners
- High capacitance ratio
- Pb-free (RoHS compliant) package



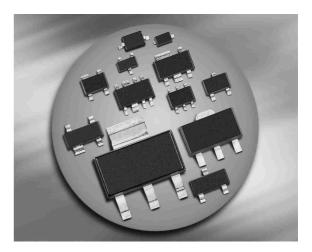

#### BB833



Туре	Package	Configuration	L <sub>S</sub> (nH)	Marking
BB833	SOD323	single	1.8	white X

## **Maximum Ratings** at $T_A = 25^{\circ}$ C, unless otherwise specified

Parameter	Symbol	Value	Unit V	
Diode reverse voltage	V <sub>R</sub>	30		
Peak reverse voltage-	V <sub>RM</sub>	35		
$R \ge 5 \mathrm{k}\Omega$				
Forward current	I <sub>F</sub>	20	mA	
Operating temperature range	T <sub>op</sub>	-55 150	°C	
Storage temperature	T <sub>stg</sub>	-55 150		



Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics	·				
Reverse current	I <sub>R</sub>				nA
V <sub>R</sub> = 30 V		-	-	20	
V <sub>R</sub> = 30 V, <i>T</i> <sub>A</sub> = 85 °C		-	-	500	
AC Characteristics					
Diode capacitance	CT				pF
V <sub>R</sub> = 1 V, <i>f</i> = 1 MHz		8.5	9.3	10	
V <sub>R</sub> = 28 V, <i>f</i> = 1 MHz		0.6	0.75	0.9	
Capacitance ratio	C <sub>T1</sub> /C <sub>T28</sub>	11	12.4	-	
V <sub>R</sub> = 1 V, V <sub>R</sub> = 28 V, <i>f</i> = 1 MHz					
Capacitance matching <sup>1)</sup>	$\Delta C_{T}/C_{T}$	-	-	3	%
V <sub>R</sub> = 1 V, V <sub>R</sub> = 28 V, <i>f</i> = 1 MHz					
Series resistance	r <sub>S</sub>	-	1.8	-	Ω
V <sub>R</sub> = 1 V, <i>f</i> = 470 MHz					


# **Electrical Characteristics** at $T_A = 25^{\circ}$ C, unless otherwise specified

<sup>1</sup>For details please refer to Application Note 047.




**Diode capacitance**  $C_{T} = f(V_{R})$ 

f = 1 MHz

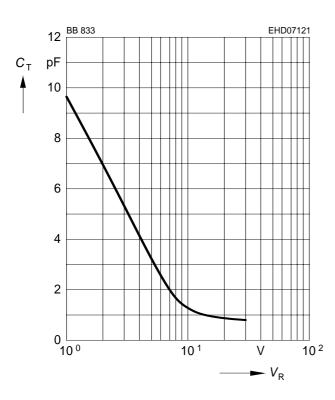


Temperature coefficient of the diode

capacitance  $T_{Cc} = f(V_R)$ 

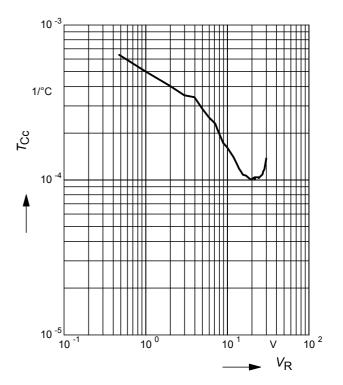



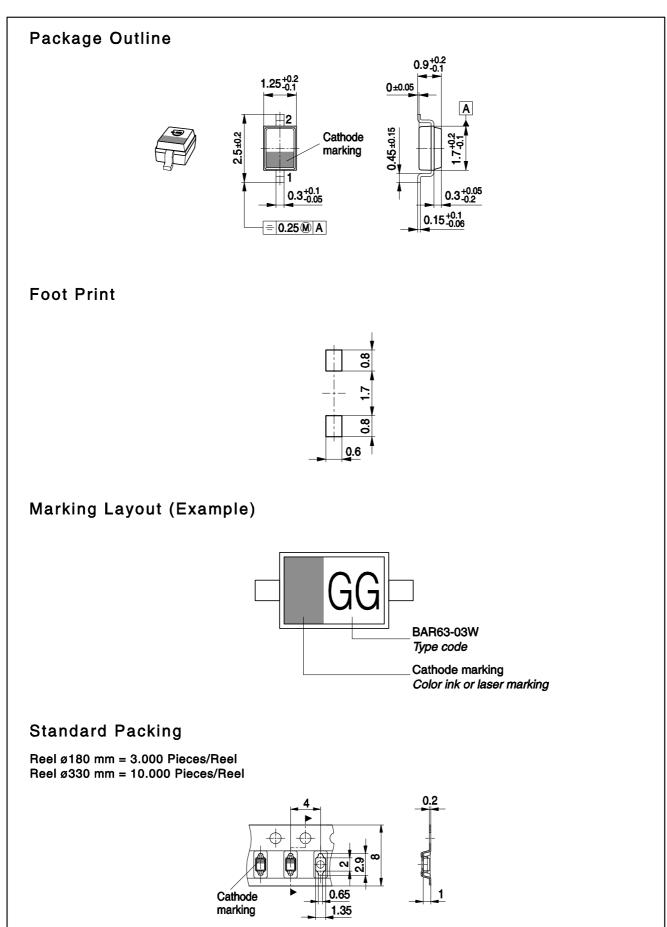



Edition 2009-11-16

Published by Infineon Technologies AG 81726 Munich, Germany

© 2009 Infineon Technologies AG All Rights Reserved.

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

#### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (<<u>www.infineon.com</u>>).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Varactor Diodes category:

Click to view products by Infineon manufacturer:

Other Similar products are found below :

MA46H201-1056 MAVR-001330-12790T MVAM108 SMV1233-079 SVC704-TL-E SVC710-TL-E 1SV324TPH3F MAVR-000083-0287AT MAVR-044769-12790T SVC270-TL-E RKV501KJ#R1 MA46H204-1056 MA46H202-1088 MA46H202-1056 MA46H203-1088 MA46H203-1056 MA46H120 MA46H070-1056 1SV282(TPH3,F) SMV1275-079LF SVC272-TL-E GC2510-17 MAVR-044769-02870T MGV1252208052X MAVR-001350-12790T SMV1251-040LF MX1977 KVX38S2-23-0 GC1213-23-0 GC15006-152 MA46603-276 SMVA1253-079LF MGV125-08-0805-2 MAVR-000079-0287FT MA46H072-1056 MA46H071-1056 MAVR-000120-12030P BB844E6327HTSA1 BB535E7904HTSA1 BBY5303WE6327HTSA1 BBY5802VH6327XTSA1 BBY6602VH6327XTSA1 ISV281(TPH3,F) BBY5502VH6327XTSA1 BB640E6327HTSA1 BBY40.215 1SV277TPH3F 1SV310TPH3F MAVR-000250-11410T 1S2638