

# PSoC™ Automotive Multitouch Generation 6L Slider

## Datasheet Summary

**Note that this is a Summary Datasheet. To access the full version of this datasheet, register in [My Infineon Collaboration Platform \(MyICP\)](#).**

## Features

- Automotive Electronics Council (AEC) AEC-Q100 qualified
- Multitouch capacitive slider controller
  - 32-bit Arm® Cortex® CPU
  - Register-configurable
  - Noise-suppression technologies for EMI
    - Effective 20-V drive for higher signal-to-noise ratio (SNR)<sup>[1]</sup>
    - AutoArmor improves both electromagnetic emissions and immunity
  - Water rejection and wet-finger tracking using DualSense
  - Multitouch glove with automatic mode switching
    - Ten fingers with thin glove ( $\leq 1$ -mm thick)
    - Two fingers with thick glove ( $\leq 5$ -mm thick)
  - Up to 3 TX configuration supported
  - Large object rejection
  - Supports 1 TX single layer configuration
  - Automatic baseline tracking to environmental changes
  - Low-power look-for-touch mode
  - Field upgrades via bootloader
  - Infineon Manufacturing Test Kit (MTK)
  - Slider sensor self-test
  - Low power CAPSENSE™ wake-up button with power consumption of 50  $\mu$ A
- System performance (configuration dependent)
  - Up to 48 sense pins, 135 intersections (45 RX and 3TX)
  - Swipe speed of up to 1000 mm/sec
  - Reports up to ten fingers
  - Small finger support down to 4 mm
  - Support up to 10 capacitive sensing buttons
  - Refresh rate up to 250 Hz; other rates configurable
  - TX frequency up to 350 kHz

## Note

1. Effective voltage when using 17 multi-phase TX and 5-V  $V_{CCTX}$  supply.

### Features

- Power (configuration-dependent)
  - 1.71 to 1.95 V and 3.0 to 5.5 V logic and digital I/Os supply
  - 3.0 to 5.5 V analog supply
  - 9-mW average power
  - 11- $\mu$ W typical deep-sleep power
- Sensor and system design (configuration-dependent)
  - Supports a variety of slider sensors and stackups
    - Manhattan, diamond
    - Plastic (PET) and glass-sensor substrates
    - Metal mesh
- Communication interface
  - I<sup>2</sup>C slave at 100 and 400 kbps
  - SPI slave bit rates up to 8 Mbps
- Package
  - 56-pin QFN wettable flank, 8 × 8 × 1 mm, 0.5-mm pin-pitch
  - 64-pin TQFP 10 × 10 × 1.4 mm, 0.5-mm pin-pitch
- Ambient temperature range
  - Automotive-A: -40°C to 85°C
  - Automotive-S: -40°C to 105°C

Ordering information


# 1 Ordering information

Table 1 lists the CYAT6165X slider controllers.

Table 1 Ordering information<sup>[2]</sup>

Marketing part number	Number of sense pins	Number of fingers	Slider	Wake up button support <sup>[3]</sup>	CAPSENSE™ buttons	Water rejection	Thin glove support	Gestures	Thick overlay/ thick glove support	Package
CYAT61652-56LWA41	41	10	✓	-	✓	✓	✓	-	-	56-pin QFN
CYAT61652-56LWS41	41	10	✓	-	✓	✓	✓	-	-	56-pin QFN
CYAT61658-56LWA41	41	10	✓	-	✓	✓	✓	-	✓	56-pin QFN
CYAT61658-56LWS41	41	10	✓	-	✓	✓	✓	-	✓	56-pin QFN
CYAT61659-56LWA41	41	10	✓	✓	✓	✓	✓	-	✓	56-pin QFN
CYAT61659-56LWS41	41	10	✓	✓	✓	✓	✓	-	✓	56-pin QFN
CYAT61652-64AA48	48	10	✓	-	✓	✓	✓	-	-	64-pin TQFP
CYAT61652-64AS48	48	10	✓	-	✓	✓	✓	-	-	64-pin TQFP
CYAT61658-64AA48	48	10	✓	-	✓	✓	✓	-	✓	64-pin TQFP
CYAT61658-64AS48	48	10	✓	-	✓	✓	✓	-	✓	64-pin TQFP
CYAT61659-64AA48	48	10	✓	✓	✓	✓	✓	-	✓	64-pin TQFP
CYAT61659-64AS48	48	10	✓	✓	✓	✓	✓	-	✓	64-pin TQFP

## 1.1 Ordering code definitions

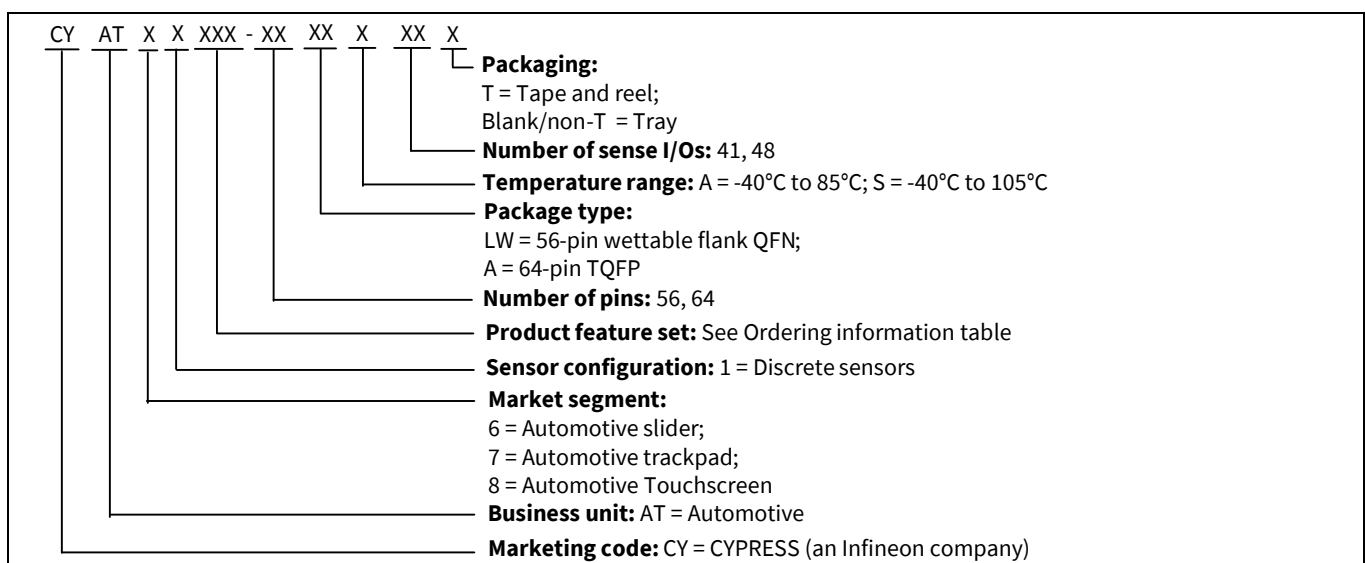

### Notes

- All devices have the following base features: Water Rejection, DisplayArmor, AutoArmor, DualSense, CAPSENSE™ buttons, and large object detection and rejection.
- Not compatible with SPI due to pin limitations.

Revision history

## Revision history

<b>Document revision</b>	<b>Date</b>	<b>Description of changes</b>
**	2022-07-26	Initial release.

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2022-07-26**  
**Published by**  
**Infineon Technologies AG**  
**81726 Munich, Germany**

**© 2022 Infineon Technologies AG.**  
**All Rights Reserved.**

**Do you have a question about this document?**  
Go to [www.infineon.com/support](http://www.infineon.com/support)

**Document reference**  
**002-35937 Rev. \*\***

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Touch Screen Controllers](#) category:*

*Click to view products by [Infineon](#) manufacturer:*

Other Similar products are found below :

[CY8CTMA461AA-33](#) [ATMXT1664T3-C2U](#) [CY8CTMA460AS-33](#) [STMPE1801BJR](#) [CG8526AA](#) [FTCU04C](#) [CP7598AT](#) [TSC2301IPAG](#)  
[AR1021-I/ML](#) [TSC2046EQPWRQ1](#) [AR1011-ISO](#) [ADS7846N/2K5](#) [AR1100T-I/SO](#) [CY8CMBR3116-LQXIT](#) [CYTMA445-44LQI33ZZA](#)  
[AR1021T-I/ML](#) [TS01S](#) [TS02NT](#) [TS04](#) [TSM12M](#) [AD7873ACPZ](#) [AD7879-1WARUZ-RL7](#) [AD7843ARUZ](#) [AD7843ARQZ](#) [HX612D](#)  
[IQS525-BL-QNR](#) [IQS572-BL-QNR](#) [SSD6250QN4R](#) [AW9203CSR](#) [CP2682SS24-A1](#) [CY8CMBR2110-24LQXI](#) [CY8CMBR3106S-LQXI](#)  
[CY8CMBR3116-LQXI](#) [SD8223LC](#) [SD8223LB](#) [BS812A-1](#) [SB8223](#) [TTP232-CA6](#) [BS8112A-3](#) [BS8116A-3](#) [BS813A-1](#) [BS83A04A-3](#)  
[CY8CMBR3102-SX1I](#) [AR1011T-ISS](#) [AR1020-I/SS](#) [AR1010-I/ML](#) [AR1010-I/SO](#) [AR1020-I/SO](#) [AR1020T-I/SO](#) [AR1021-I/SS](#)