

Preliminary datasheet

EasyPIM™ module with TRENCHSTOP™ IGBT7 and Emitter Controlled 7 diode and NTC

Features

- Electrical features
 - Overload operation up to 175°C
 - Low V_{CEsat}
 - TRENCHSTOP™ IGBT7
- Mechanical features
 - Solder contact technology
 - 2.5 kV AC 1 min insulation
 - Al_2O_3 substrate with low thermal resistance
 - Compact design
 - High power density



Typical Appearance

Potential applications

- Auxiliary inverters
- Motor drives
- Air conditioning

Product validation

- Qualified for industrial applications according to the relevant tests of IEC 60747, 60749 and 60068

Description

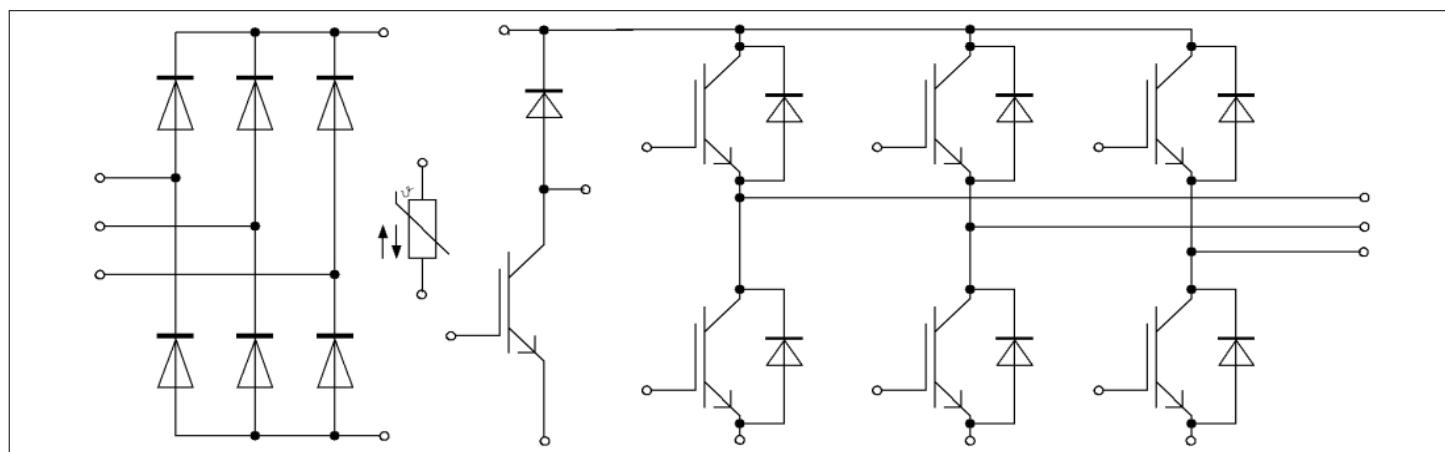


Table of contents

Table of contents

Description	1
Features	1
Potential applications	1
Product validation	1
Table of contents	2
1 Package	3
2 IGBT, Inverter	3
3 Diode, Inverter	5
4 Diode, Rectifier	6
5 IGBT, Brake-Chopper	7
6 Diode, Brake-Chopper	8
7 NTC-Thermistor	9
8 Characteristics diagrams	10
9 Circuit diagram	16
10 Package outlines	17
11 Module label code	18
Disclaimer	19

1 Package

1 Package

Table 1 Insulation coordination

Parameter	Symbol	Note or test condition	Values	Unit
Isolation test voltage	V_{ISOL}	RMS, $f = 50 \text{ Hz}$, $t = 1 \text{ min}$	2.5	kV
Internal Isolation		basic insulation (class 1, IEC 61140)	Al_2O_3	
Creepage distance	d_{Creep}	terminal to heatsink	11.5	mm
Creepage distance	d_{Creep}	terminal to terminal	6.3	mm
Clearance	d_{Clear}	terminal to heatsink	10.0	mm
Clearance	d_{Clear}	terminal to terminal	5.0	mm
Comparative tracking index	CTI		> 200	
RTI Elec.	RTI	housing	140	°C

Table 2 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Stray inductance module	L_{sCE}			30		nH
Module lead resistance, terminals - chip	$R_{AA'+CC'}$	$T_H=25^\circ\text{C}$, per switch		6		mΩ
Module lead resistance, terminals - chip	$R_{CC'+EE'}$	$T_H=25^\circ\text{C}$, per switch		8		mΩ
Storage temperature	T_{stg}		-40		125	°C
Mounting force per clamp	F		20		50	N
Weight	G			24		g

Note: The current under continuous operation is limited to 30A rms per connector pin.

2 IGBT, Inverter

Table 3 Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit
Collector-emitter voltage	V_{CES}	$T_{vj} = 25^\circ\text{C}$	1200	V
Continous DC collector current	I_{CDC}	$T_{vj \max} = 175^\circ\text{C}$	25	A
Repetitive peak collector current	I_{CRM}	$t_P = 1 \text{ ms}$	50	A
Gate-emitter peak voltage	V_{GES}		±20	V

Table 4 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE\text{ sat}}$	$I_C = 25 \text{ A}, V_{GE} = 15 \text{ V}$	$T_{vj} = 25^\circ\text{C}$		1.60	TBD
			$T_{vj} = 125^\circ\text{C}$		1.74	
			$T_{vj} = 175^\circ\text{C}$		1.82	
Gate threshold voltage	$V_{GE\text{th}}$	$I_C = 0.525 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^\circ\text{C}$	5.15	5.80	6.45	V
Gate charge	Q_G	$V_{GE} = \pm 15 \text{ V}, V_{CE} = 600 \text{ V}$		0.395		μC
Internal gate resistor	$R_{G\text{int}}$	$T_{vj} = 25^\circ\text{C}$		0		Ω
Input capacitance	C_{ies}	$f = 100 \text{ kHz}, T_{vj} = 25^\circ\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$		4.77		nF
Reverse transfer capacitance	C_{res}	$f = 100 \text{ kHz}, T_{vj} = 25^\circ\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$		0.017		nF
Collector-emitter cut-off current	I_{CES}	$V_{CE} = 1200 \text{ V}, V_{GE} = 0 \text{ V}$	$T_{vj} = 25^\circ\text{C}$		0.0056	mA
Gate-emitter leakage current	I_{GES}	$V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^\circ\text{C}$			100	nA
Turn-on delay time (inductive load)	t_{don}	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{G\text{on}} = 6.2 \Omega$	$T_{vj} = 25^\circ\text{C}$		0.037	μs
			$T_{vj} = 125^\circ\text{C}$		0.039	
			$T_{vj} = 175^\circ\text{C}$		0.040	
Rise time (inductive load)	t_r	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{G\text{on}} = 6.2 \Omega$	$T_{vj} = 25^\circ\text{C}$		0.020	μs
			$T_{vj} = 125^\circ\text{C}$		0.024	
			$T_{vj} = 175^\circ\text{C}$		0.025	
Turn-off delay time (inductive load)	t_{doff}	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{G\text{off}} = 6.2 \Omega$	$T_{vj} = 25^\circ\text{C}$		0.186	μs
			$T_{vj} = 125^\circ\text{C}$		0.291	
			$T_{vj} = 175^\circ\text{C}$		0.334	
Fall time (inductive load)	t_f	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{G\text{off}} = 6.2 \Omega$	$T_{vj} = 25^\circ\text{C}$		0.173	μs
			$T_{vj} = 125^\circ\text{C}$		0.220	
			$T_{vj} = 175^\circ\text{C}$		0.285	
Turn-on energy loss per pulse	E_{on}	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, L_\sigma = 35 \text{ nH}, V_{GE} = \pm 15 \text{ V}, R_{G\text{on}} = 6.2 \Omega, di/dt = 950 \text{ A}/\mu\text{s} (T_{vj} = 175^\circ\text{C})$	$T_{vj} = 25^\circ\text{C}$		1.55	mJ
			$T_{vj} = 125^\circ\text{C}$		2.1	
			$T_{vj} = 175^\circ\text{C}$		2.45	
Turn-off energy loss per pulse	E_{off}	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, L_\sigma = 35 \text{ nH}, V_{GE} = \pm 15 \text{ V}, R_{G\text{off}} = 6.2 \Omega, dv/dt = 2900 \text{ V}/\mu\text{s} (T_{vj} = 175^\circ\text{C})$	$T_{vj} = 25^\circ\text{C}$		1.58	mJ
			$T_{vj} = 125^\circ\text{C}$		2.45	
			$T_{vj} = 175^\circ\text{C}$		3.05	
SC data	I_{SC}	$V_{GE} \leq 15 \text{ V}, V_{CC} = 800 \text{ V}, V_{CE\text{max}} = V_{CES} - L_{sCE} * di/dt$	$t_P \leq 8 \mu\text{s}, T_{vj} = 150^\circ\text{C}$		80	A
			$t_P \leq 7 \mu\text{s}, T_{vj} = 175^\circ\text{C}$		75	

Table 4 Characteristic values (continued)

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Thermal resistance, junction to heatsink	R_{thJH}	per IGBT		1.55		K/W
Temperature under switching conditions	$T_{vj\ op}$		-40		175	°C

Note: $T_{vj\ op} > 150^\circ\text{C}$ is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

3 Diode, Inverter

Table 5 Maximum rated values

Parameter	Symbol	Note or test condition	Values			Unit
Repetitive peak reverse voltage	V_{RRM}		$T_{vj} = 25^\circ\text{C}$	1200		V
Continuous DC forward current	I_F			25		A
Repetitive peak forward current	I_{FRM}	$t_P = 1\text{ ms}$		50		A
I^2t - value	I^2t	$V_R = 0\text{ V}, t_P = 10\text{ ms}$	$T_{vj} = 125^\circ\text{C}$	72.5		A^2s
			$T_{vj} = 175^\circ\text{C}$	63		

Table 6 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Forward voltage	V_F	$I_F = 25\text{ A}, V_{GE} = 0\text{ V}$	$T_{vj} = 25^\circ\text{C}$		1.83	TBD
			$T_{vj} = 125^\circ\text{C}$		1.70	
			$T_{vj} = 175^\circ\text{C}$		1.63	
Peak reverse recovery current	I_{RM}	$I_F = 25\text{ A}, V_R = 600\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 950\text{ A}/\mu\text{s} (T_{vj} = 175^\circ\text{C})$	$T_{vj} = 25^\circ\text{C}$		24.2	
			$T_{vj} = 125^\circ\text{C}$		32.4	
			$T_{vj} = 175^\circ\text{C}$		37.6	
Recovered charge	Q_r	$I_F = 25\text{ A}, V_R = 600\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 950\text{ A}/\mu\text{s} (T_{vj} = 175^\circ\text{C})$	$T_{vj} = 25^\circ\text{C}$		2.25	
			$T_{vj} = 125^\circ\text{C}$		3.82	
			$T_{vj} = 175^\circ\text{C}$		4.95	
Reverse recovery energy	E_{rec}	$I_F = 25\text{ A}, V_R = 600\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 950\text{ A}/\mu\text{s} (T_{vj} = 175^\circ\text{C})$	$T_{vj} = 25^\circ\text{C}$		0.65	
			$T_{vj} = 125^\circ\text{C}$		1.41	
			$T_{vj} = 175^\circ\text{C}$		1.87	

Table 6 Characteristic values (continued)

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Thermal resistance, junction to heatsink	R_{thJH}	per diode		2.04		K/W
Temperature under switching conditions	$T_{\text{vj op}}$		-40		175	°C

Note: $T_{\text{vj op}} > 150^{\circ}\text{C}$ is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

4 Diode, Rectifier

Table 7 Maximum rated values

Parameter	Symbol	Note or test condition		Values		Unit
Repetitive peak reverse voltage	V_{RRM}	$T_{\text{vj}} = 25^{\circ}\text{C}$		1600		V
Maximum RMS forward current per chip	I_{FRMSM}	$T_{\text{H}} = 100^{\circ}\text{C}$		25		A
Maximum RMS current at rectifier output	I_{RMSM}	$T_{\text{H}} = 100^{\circ}\text{C}$		25		A
Surge forward current	I_{FSM}	$t_{\text{P}} = 10 \text{ ms}$	$T_{\text{vj}} = 25^{\circ}\text{C}$	300		A
			$T_{\text{vj}} = 150^{\circ}\text{C}$	245		
I^2t - value	I^2t	$t_{\text{P}} = 10 \text{ ms}$	$T_{\text{vj}} = 25^{\circ}\text{C}$	450		A^2s
			$T_{\text{vj}} = 150^{\circ}\text{C}$	300		

Table 8 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Forward voltage	V_F	$I_F = 10 \text{ A}$	$T_{\text{vj}} = 150^{\circ}\text{C}$		0.80		V
Reverse current	I_r	$T_{\text{vj}} = 150^{\circ}\text{C}, V_R = 1600 \text{ V}$			1		mA
Thermal resistance, junction to heatsink	R_{thJH}	per diode			1.54		K/W
Temperature under switching conditions	$T_{\text{vj, op}}$			-40		150	°C

5 IGBT, Brake-Chopper

Table 9 Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit
Collector-emitter voltage	V_{CES}	$T_{vj} = 25^\circ\text{C}$	1200	V
Continuous DC collector current	I_{CDC}	$T_{vj \max} = 175^\circ\text{C}$	25	A
Repetitive peak collector current	I_{CRM}	$t_P = 1 \text{ ms}$	50	A
Gate-emitter peak voltage	V_{GES}		± 20	V

Table 10 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE \text{ sat}}$	$I_C = 25 \text{ A}, V_{GE} = 15 \text{ V}$	$T_{vj} = 25^\circ\text{C}$	1.60	TBD	V
			$T_{vj} = 125^\circ\text{C}$	1.74		
			$T_{vj} = 175^\circ\text{C}$	1.82		
Gate threshold voltage	$V_{GE \text{ th}}$	$I_C = 0.525 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^\circ\text{C}$	5.15	5.80	6.45	V
Gate charge	Q_G	$V_{GE} = \pm 15 \text{ V}, V_{CE} = 600 \text{ V}$		0.395		μC
Internal gate resistor	R_{Gint}	$T_{vj} = 25^\circ\text{C}$		0		Ω
Input capacitance	C_{ies}	$f = 100 \text{ kHz}, T_{vj} = 25^\circ\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$		4.77		nF
Reverse transfer capacitance	C_{res}	$f = 100 \text{ kHz}, T_{vj} = 25^\circ\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$		0.017		nF
Collector-emitter cut-off current	I_{CES}	$V_{CE} = 1200 \text{ V}, V_{GE} = 0 \text{ V}$	$T_{vj} = 25^\circ\text{C}$		0.0056	mA
Gate-emitter leakage current	I_{GES}	$V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^\circ\text{C}$			100	nA
Turn-on delay time (inductive load)	t_{don}	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{Gon} = 10 \Omega$	$T_{vj} = 25^\circ\text{C}$	0.058		μs
			$T_{vj} = 125^\circ\text{C}$	0.060		
			$T_{vj} = 175^\circ\text{C}$	0.061		
Rise time (inductive load)	t_r	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{Gon} = 10 \Omega$	$T_{vj} = 25^\circ\text{C}$	0.055		μs
			$T_{vj} = 125^\circ\text{C}$	0.057		
			$T_{vj} = 175^\circ\text{C}$	0.058		
Turn-off delay time (inductive load)	t_{doff}	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{Goff} = 10 \Omega$	$T_{vj} = 25^\circ\text{C}$	0.205		μs
			$T_{vj} = 125^\circ\text{C}$	0.310		
			$T_{vj} = 175^\circ\text{C}$	0.353		
Fall time (inductive load)	t_f	$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, R_{Goff} = 10 \Omega$	$T_{vj} = 25^\circ\text{C}$	0.173		μs
			$T_{vj} = 125^\circ\text{C}$	0.220		
			$T_{vj} = 175^\circ\text{C}$	0.285		

Table 10 Characteristic values (continued)

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Turn-on energy loss per pulse	E_{on}	$I_C = 25 \text{ A}$, $V_{CE} = 600 \text{ V}$, $L_\sigma = 35 \text{ nH}$, $V_{GE} = \pm 15 \text{ V}$, $R_{Gon} = 10 \Omega$, $di/dt = 320 \text{ A}/\mu\text{s}$ ($T_{vj} = 175^\circ\text{C}$)	$T_{vj} = 25^\circ\text{C}$		2.15	mJ
			$T_{vj} = 125^\circ\text{C}$		2.65	
			$T_{vj} = 175^\circ\text{C}$		2.9	
Turn-off energy loss per pulse	E_{off}	$I_C = 25 \text{ A}$, $V_{CE} = 600 \text{ V}$, $L_\sigma = 35 \text{ nH}$, $V_{GE} = \pm 15 \text{ V}$, $R_{Goff} = 10 \Omega$, $dv/dt = 2900 \text{ V}/\mu\text{s}$ ($T_{vj} = 175^\circ\text{C}$)	$T_{vj} = 25^\circ\text{C}$		1.58	mJ
			$T_{vj} = 125^\circ\text{C}$		2.45	
			$T_{vj} = 175^\circ\text{C}$		3.05	
SC data	I_{SC}	$V_{GE} \leq 15 \text{ V}$, $V_{CC} = 800 \text{ V}$, $V_{CEmax} = V_{CES} - L_{sCE} * di/dt$	$t_P \leq 8 \mu\text{s}$, $T_{vj} = 150^\circ\text{C}$		80	A
			$t_P \leq 7 \mu\text{s}$, $T_{vj} = 175^\circ\text{C}$		75	
Thermal resistance, junction to heatsink	R_{thJH}	per IGBT			1.55	K/W
Temperature under switching conditions	$T_{vj op}$			-40	175	°C

Note: $T_{vj op} > 150^\circ\text{C}$ is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

6 Diode, Brake-Chopper

Table 11 Maximum rated values

Parameter	Symbol	Note or test condition	Values		Unit
Repetitive peak reverse voltage	V_{RRM}		$T_{vj} = 25^\circ\text{C}$	1200	V
Continuous DC forward current	I_F			10	A
Repetitive peak forward current	I_{FRM}	$t_P = 1 \text{ ms}$		20	A
I^2t - value	I^2t	$V_R = 0 \text{ V}$, $t_P = 10 \text{ ms}$	$T_{vj} = 125^\circ\text{C}$	27.5	A^2s
			$T_{vj} = 175^\circ\text{C}$	24	

7 NTC-Thermistor

Table 12 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Forward voltage	V_F	$I_F = 10 \text{ A}, V_{GE} = 0 \text{ V}$	$T_{vj} = 25^\circ\text{C}$	1.72	TBD	V
			$T_{vj} = 125^\circ\text{C}$	1.59		
			$T_{vj} = 175^\circ\text{C}$	1.52		
Peak reverse recovery current	I_{RM}	$I_F = 10 \text{ A}, V_R = 600 \text{ V}, -di_F/dt = 300 \text{ A}/\mu\text{s}$ ($T_{vj} = 175^\circ\text{C}$)	$T_{vj} = 25^\circ\text{C}$	8.1		A
			$T_{vj} = 125^\circ\text{C}$	10.1		
			$T_{vj} = 175^\circ\text{C}$	11.7		
Recovered charge	Q_r	$I_F = 10 \text{ A}, V_R = 600 \text{ V}, -di_F/dt = 300 \text{ A}/\mu\text{s}$ ($T_{vj} = 175^\circ\text{C}$)	$T_{vj} = 25^\circ\text{C}$	0.74		μC
			$T_{vj} = 125^\circ\text{C}$	1.37		
			$T_{vj} = 175^\circ\text{C}$	1.84		
Reverse recovery energy	E_{rec}	$I_F = 10 \text{ A}, V_R = 600 \text{ V}, -di_F/dt = 300 \text{ A}/\mu\text{s}$ ($T_{vj} = 175^\circ\text{C}$)	$T_{vj} = 25^\circ\text{C}$	0.26		mJ
			$T_{vj} = 125^\circ\text{C}$	0.52		
			$T_{vj} = 175^\circ\text{C}$	0.72		
Thermal resistance, junction to heatsink	R_{thJH}	per diode		2.45		K/W
Temperature under switching conditions	$T_{vj op}$		-40		175	°C

Note: $T_{vj op} > 150^\circ\text{C}$ is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

7 NTC-Thermistor

Table 13 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Rated resistance	R_{25}	$T_{NTC} = 25^\circ\text{C}$		5		kΩ
Deviation of R_{100}	$\Delta R/R$	$T_{NTC} = 100^\circ\text{C}, R_{100} = 493 \Omega$	-5		5	%
Power dissipation	P_{25}	$T_{NTC} = 25^\circ\text{C}$			20	mW
B-value	$B_{25/50}$	$R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298,15 \text{ K}))]$		3375		K
B-value	$B_{25/80}$	$R_2 = R_{25} \exp[B_{25/80}(1/T_2 - 1/(298,15 \text{ K}))]$		3411		K
B-value	$B_{25/100}$	$R_2 = R_{25} \exp[B_{25/100}(1/T_2 - 1/(298,15 \text{ K}))]$		3433		K

Note: Specification according to the valid application note.


8 Characteristics diagrams

8 Characteristics diagrams

output characteristic (typical), IGBT, Inverter

$$I_C = f(V_{CE})$$


$$V_{GE} = 15 \text{ V}$$

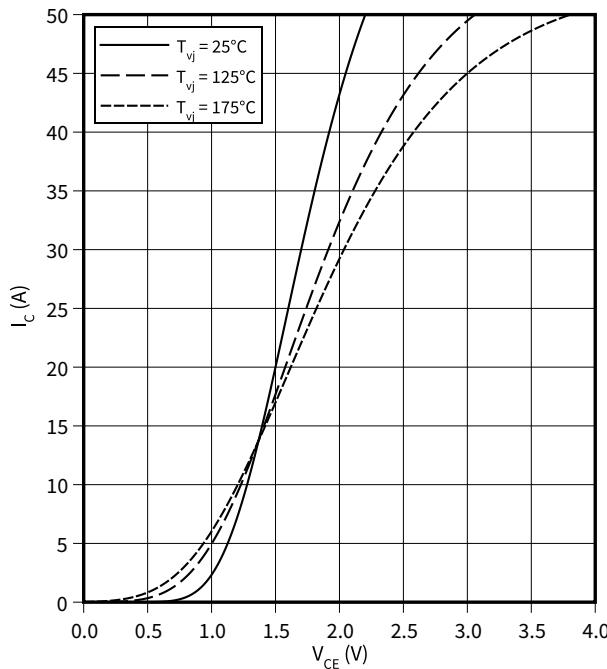

output characteristic (typical), IGBT, Inverter

$$I_C = f(V_{CE})$$


$$T_{vj} = 175 \text{ °C}$$

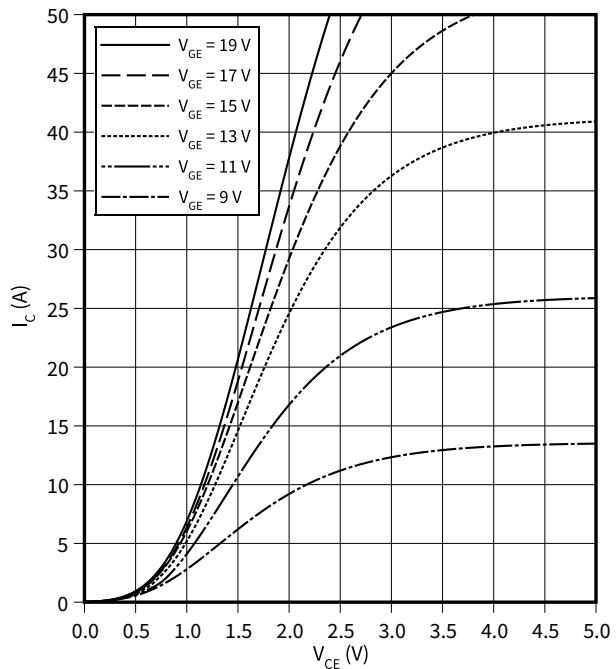

transfer characteristic (typical), IGBT, Inverter

$$I_C = f(V_{GE})$$


$$V_{CE} = 20 \text{ V}$$

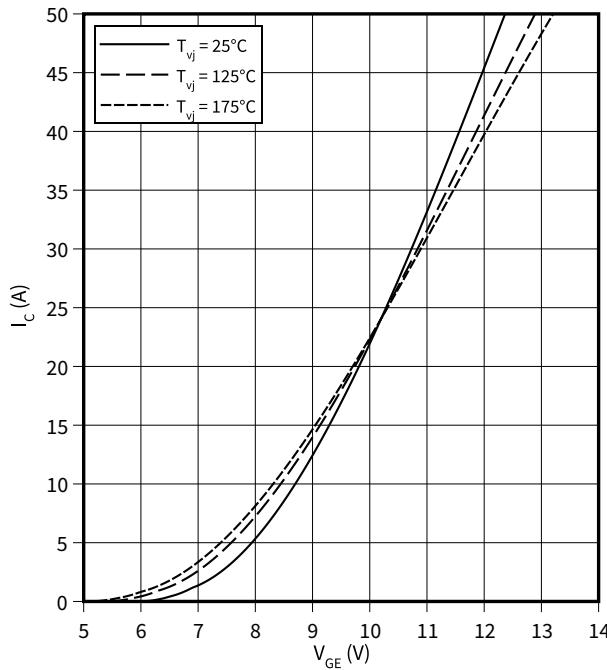

switching losses (typical), IGBT, Inverter

$$E = f(I_C)$$

$$R_{Goff} = 6.2 \Omega, R_{Gon} = 6.2 \Omega, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}$$

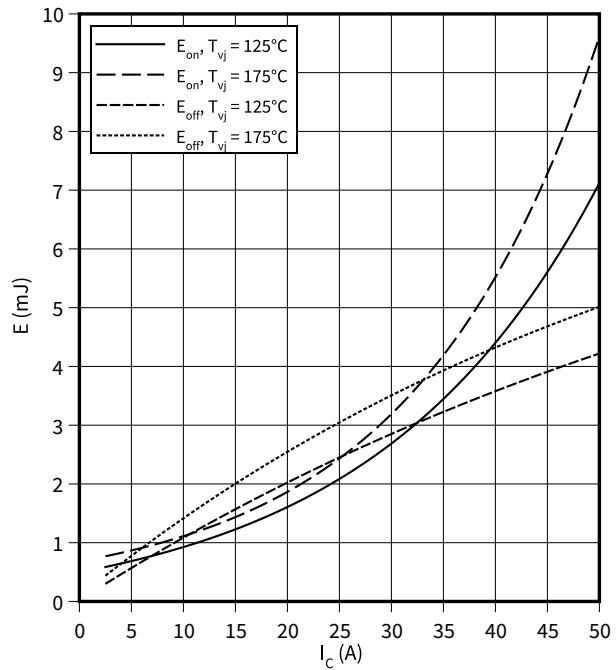


8 Characteristics diagrams

switching losses (typical), IGBT, Inverter

$$E = f(R_G)$$


$$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}$$

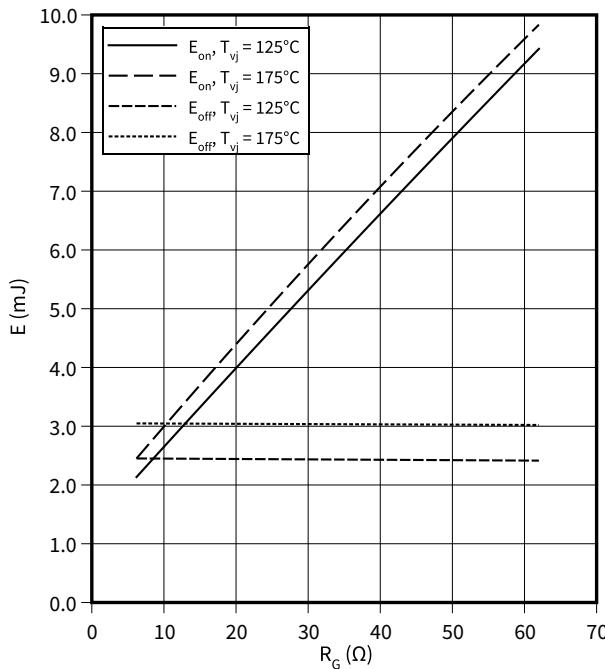

switching times (typical), IGBT, Inverter

$$t = f(I_C)$$


$$R_{Goff} = 6.2 \Omega, R_{Gon} = 6.2 \Omega, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, T_{vj} = 175 \text{ }^{\circ}\text{C}$$

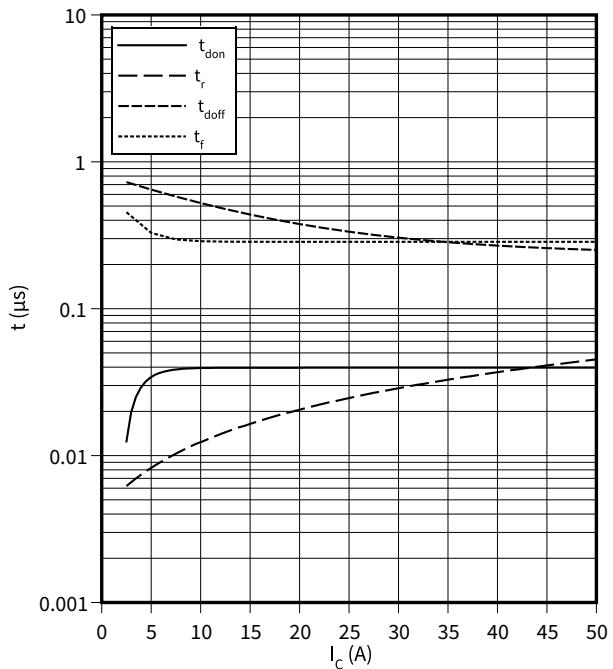

switching times (typical), IGBT, Inverter

$$t = f(R_G)$$


$$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, T_{vj} = 175 \text{ }^{\circ}\text{C}$$

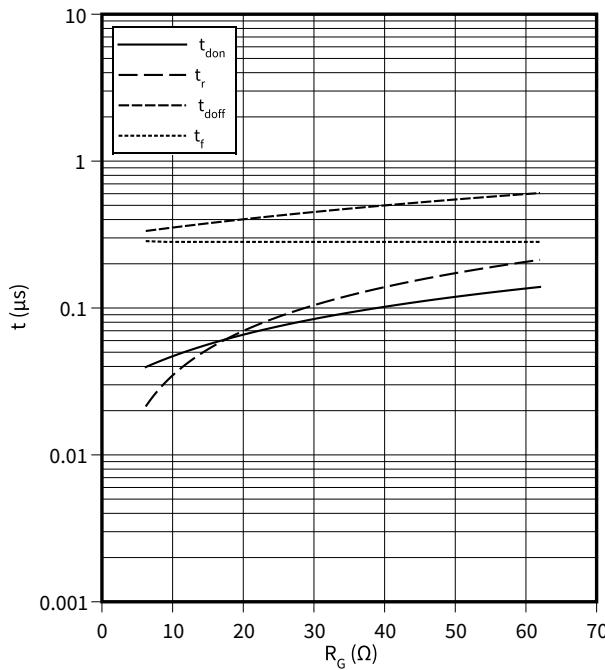

dv/dt (typical), IGBT, Inverter

$$dv/dt = f(R_G)$$


$$I_C = 25 \text{ A}, V_{CE} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}, T_{vj} = 25 \text{ }^{\circ}\text{C}$$

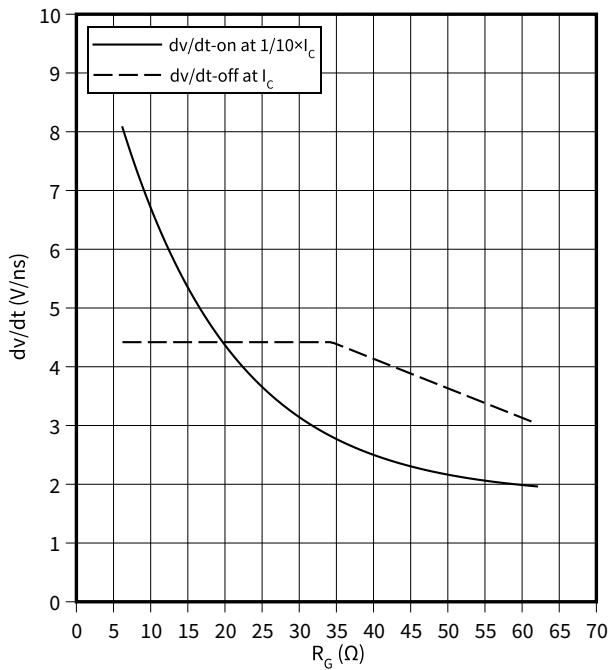

8 Characteristics diagrams

transient thermal impedance , IGBT, Inverter


$$Z_{th} = f(t)$$

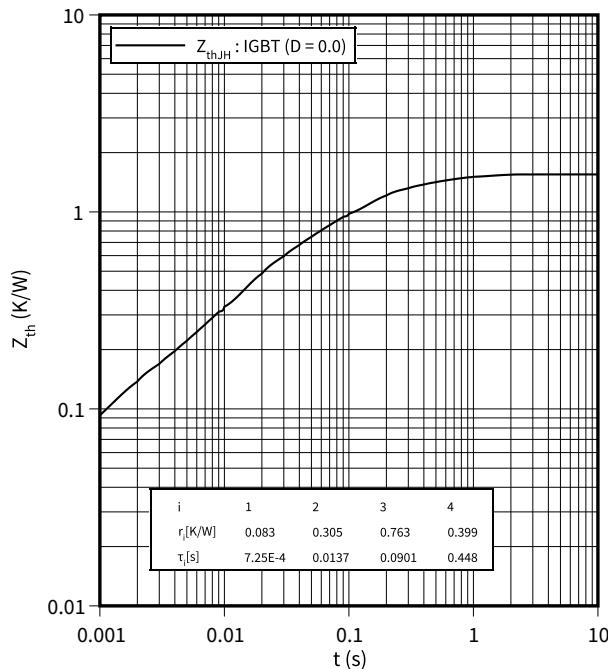

reverse bias safe operating area (RBSOA), IGBT, Inverter

$$I_C = f(V_{CE})$$


$R_{Goff} = 6.2 \Omega$, $V_{GE} = \pm 15.0 \text{ V}$, $T_{vj} = 175 \text{ }^\circ\text{C}$

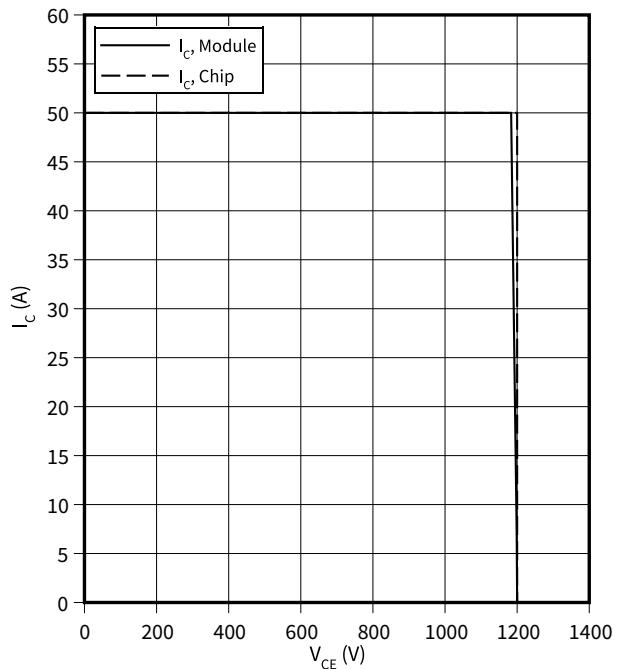

capacity characteristic (typical), IGBT, Inverter

$$C = f(V_{CE})$$


$f = 100 \text{ kHz}$, $T_{vj} = 25 \text{ }^\circ\text{C}$, $V_{GE} = 0 \text{ V}$

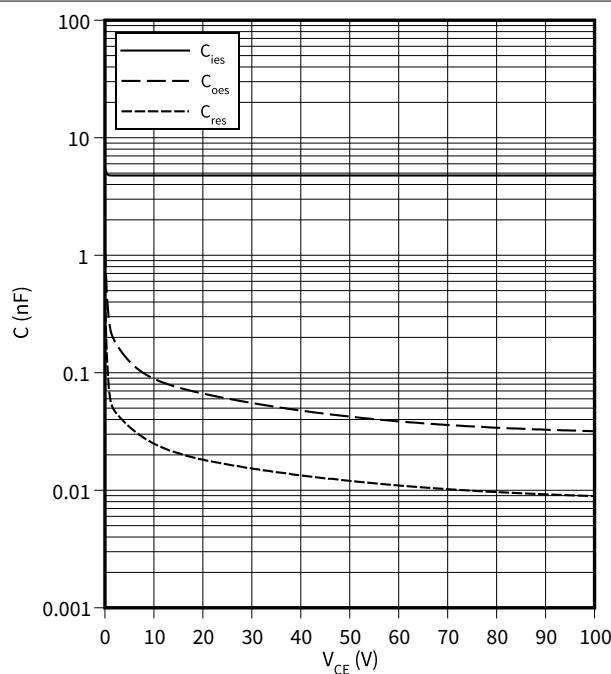

gate charge characteristic (typical), IGBT, Inverter

$$V_{GE} = f(Q_G)$$


$T_{vj} = 25 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$

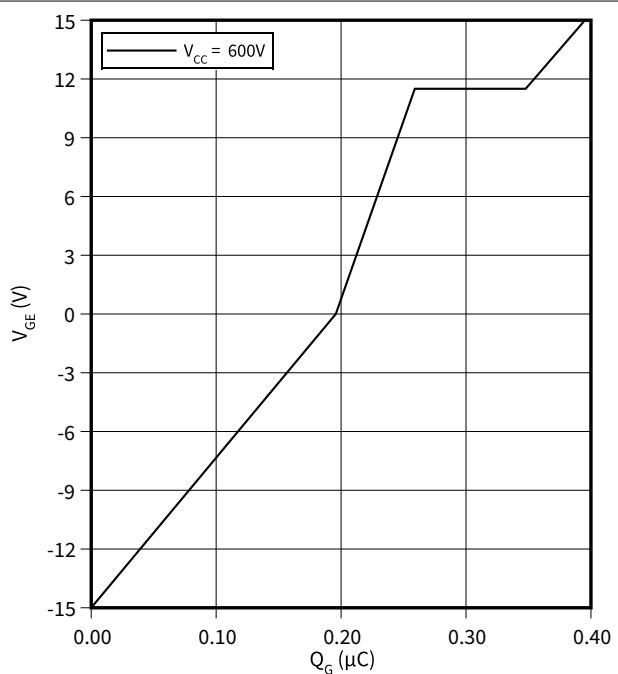

8 Characteristics diagrams

forward characteristic (typical), Diode, Inverter


$$I_F = f(V_F)$$

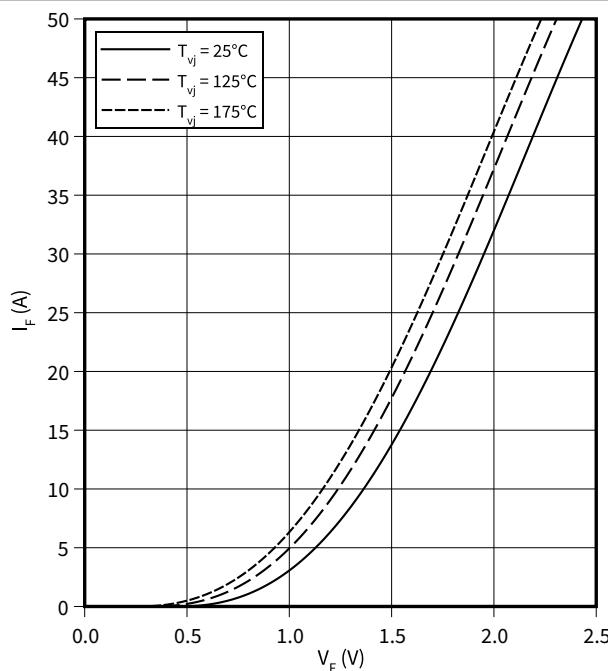

switching losses (typical), Diode, Inverter

$$E_{rec} = f(I_F)$$


R_{Gon} = 6.2 Ω, V_{CE} = 600 V

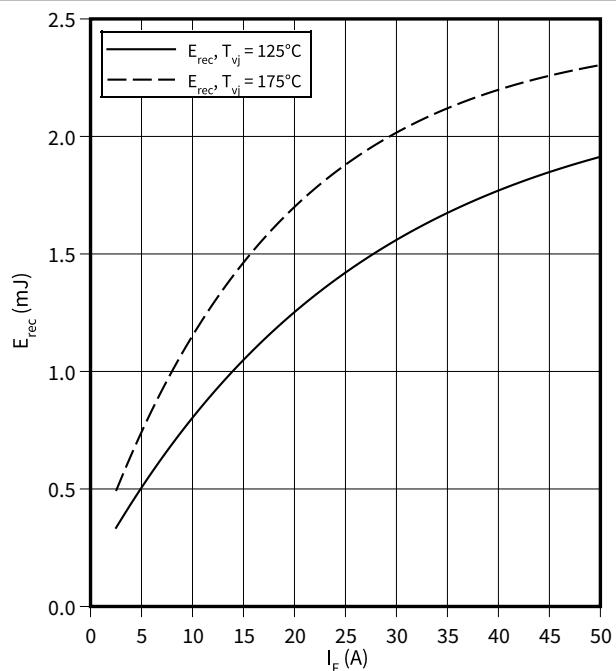

switching losses (typical), Diode, Inverter


$$E_{rec} = f(R_G)$$

V_{CE} = 600 V, I_F = 25 A

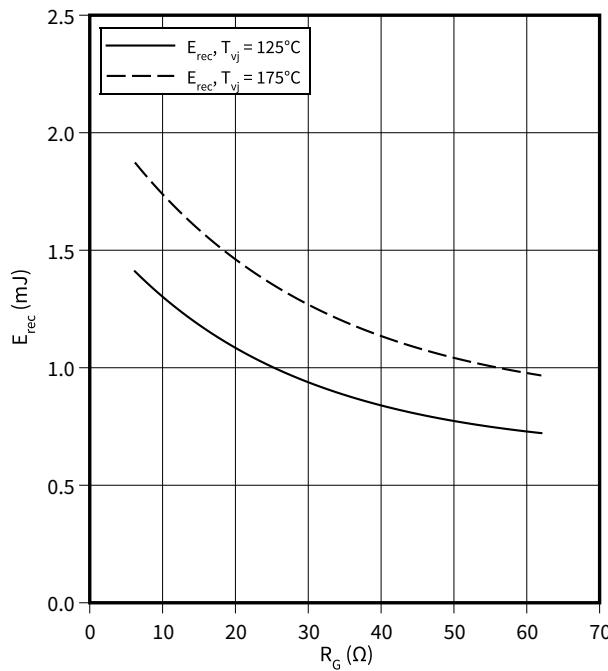

transient thermal impedance , Diode, Inverter


$$Z_{th} = f(t)$$

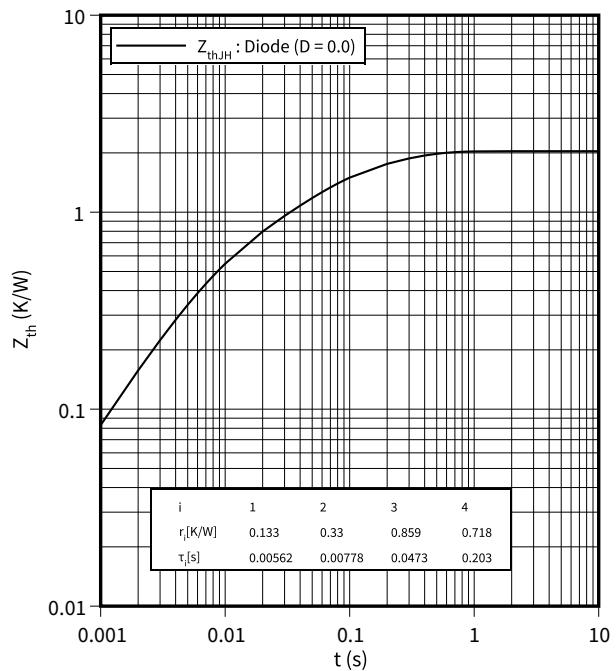

8 Characteristics diagrams


forward characteristic (typical), Diode, Rectifier

$$I_F = f(V_F)$$

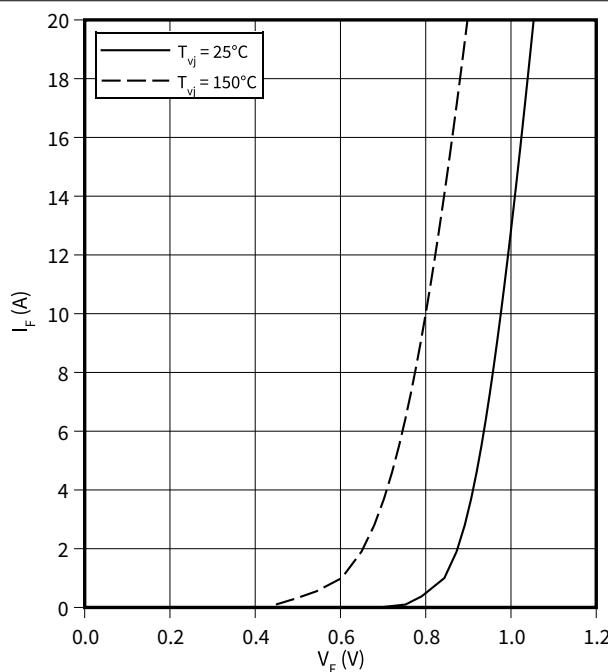

transient thermal impedance , Diode, Rectifier


$$Z_{th} = f(t)$$

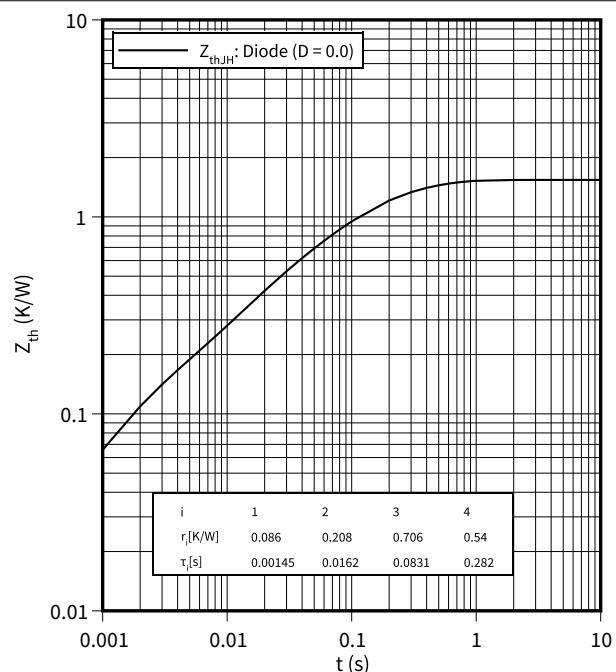

output characteristic (typical), IGBT, Brake-Chopper


$$I_C = f(V_{CE})$$

$$V_{GE} = 15 \text{ V}$$

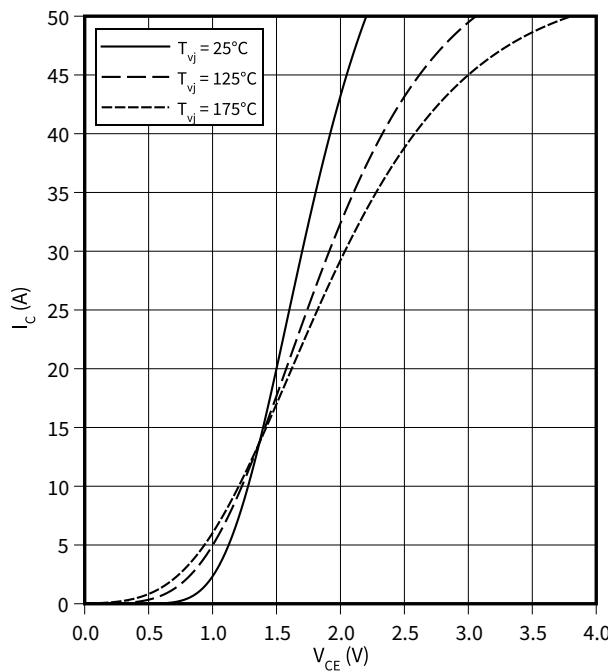

forward characteristic (typical), Diode, Brake-Chopper


$$I_F = f(V_F)$$

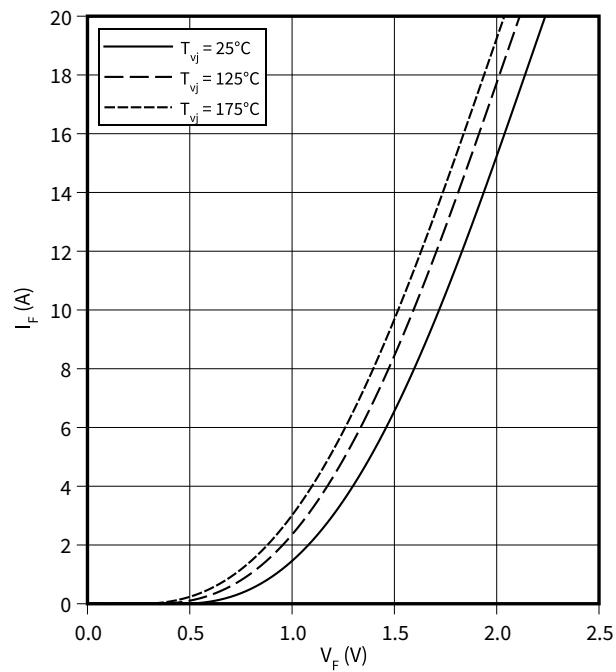

8 Characteristics diagrams

temperature characteristic (typical), NTC-Thermistor

$$R = f(T_{NTC})$$

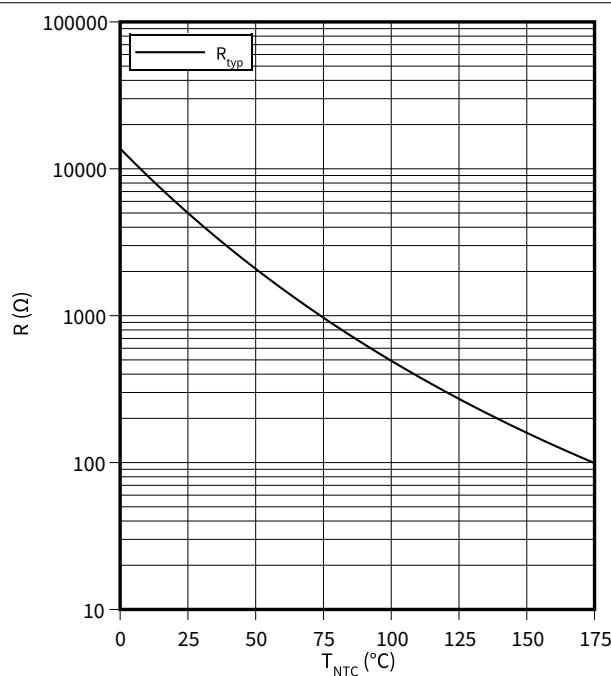

9 Circuit diagram

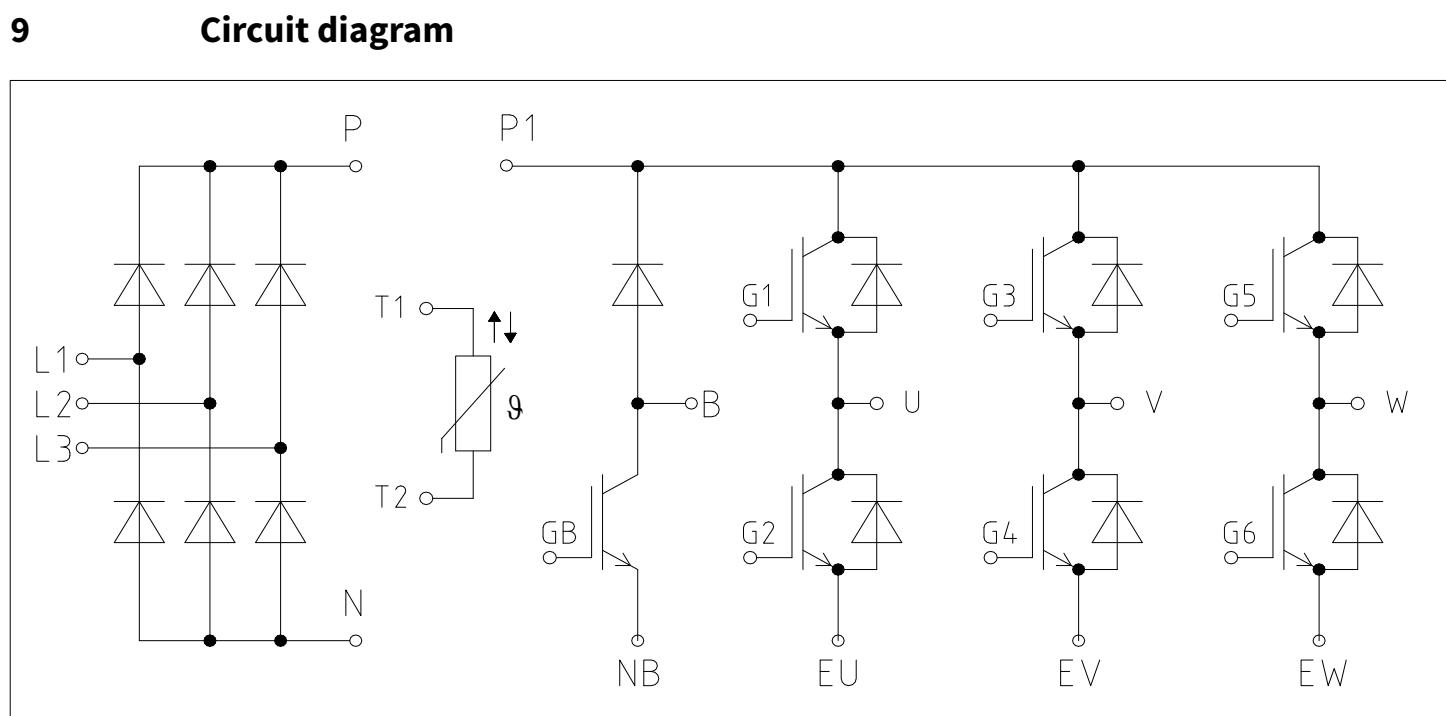


Figure 2

10 Package outlines

10

Package outlines

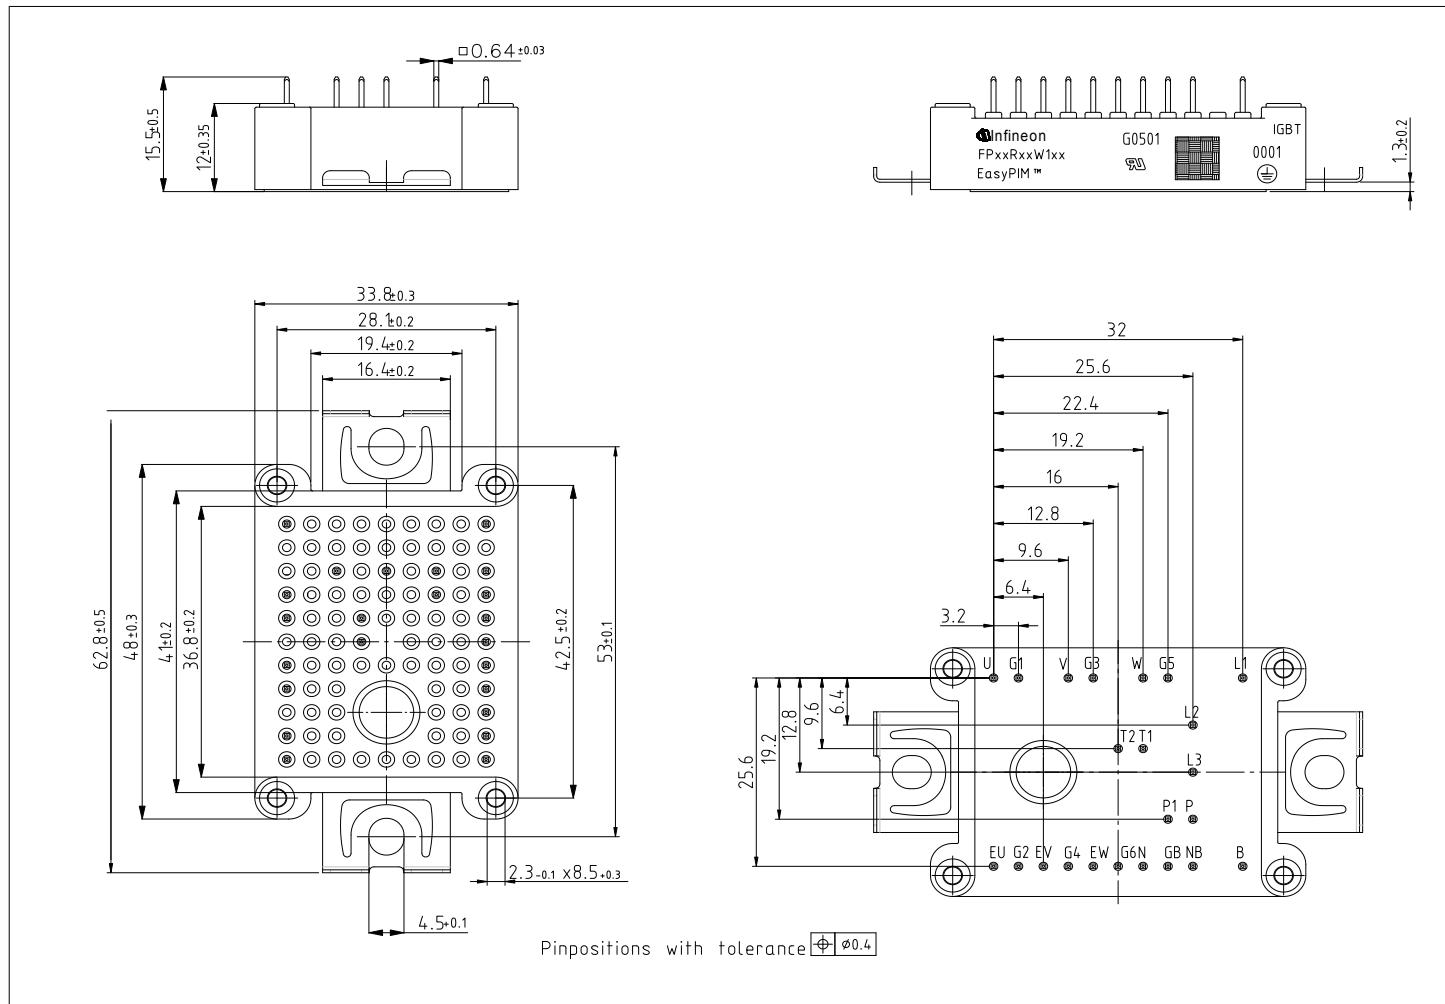


Figure 3

11 Module label code

11 Module label code

Module label code			
Code format	Data Matrix		Barcode Code128
Encoding	ASCII text		Code Set A
Symbol size	16x16		23 digits
Standard	IEC24720 and IEC16022		IEC8859-1
Code content	<i>Content</i> Module serial number Module material number Production order number Date code (production year) Date code (production week)	<i>Digit</i> 1 – 5 6 - 11 12 - 19 20 – 21 22 – 23	<i>Example</i> 71549 142846 55054991 15 30
Example	 71549142846550549911530	 71549142846550549911530	

Figure 4

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-03-09

Published by

**Infineon Technologies AG
81726 Munich, Germany**

**© 2021 Infineon Technologies AG
All Rights Reserved.**

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

**Document reference
IFX-**

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Please note that this product is not qualified according to the AEC Q100 or AEC Q101 documents of the Automotive Electronics Council.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IGBT Modules](#) category:

Click to view products by [Infineon manufacturer:](#)

Other Similar products are found below :

[F3L400R07ME4_B22](#) [F3L400R12PT4_B26](#) [FB20R06W1E3_B11](#) [FD300R12KE3](#) [FD300R12KS4_B5](#) [FD400R12KE3](#) [FF100R12KS4](#)
[FF150R12KE3G](#) [FF200R06KE3](#) [FF200R06YE3](#) [FF300R06KE3_B2](#) [FF300R17ME4](#) [FF600R12IP4V](#) [FF800R17KP4_B2](#) [FF900R12IE4V](#)
[FP06R12W1T4_B3](#) [FP100R07N3E4](#) [FP100R07N3E4_B11](#) [FP10R06W1E3_B11](#) [FP10R12W1T4_B11](#) [FP10R12YT3](#) [FP15R12W2T4](#)
[FP15R12YT3](#) [FP20R06W1E3](#) [FP30R06W1E3](#) [FP40R12KT3G](#) [FP75R06KE3](#) [FS10R12YE3](#) [FS150R07PE4](#) [FS150R12PT4](#)
[FS150R17N3E4_B11](#) [FS20R06W1E3_B11](#) [FS30R06W1E3_B11](#) [FS75R12KE3G](#) [FS75R12W2T4_B11](#) [FZ1600R17HP4_B2](#)
[FZ300R12KE3G](#) [FZ400R17KE3](#) [FZ400R17KE4](#) [FZ600R65KE3](#) [DF1000R17IE4D_B2](#) [APTGT75DA60T1G](#) [DZ800S17K3](#) [F12-25R12KT4G](#) [F3L200R12W2H3_B11](#) [F3L300R12ME4_B22](#) [F3L75R07W2E3_B11](#) [F4-150R12KS4](#) [F475R07W1H3B11ABOMA1](#)
[FD1400R12IP4D](#)