

## Reverse-Conducting IGBT with monolithic body diode

### Features


- Complete product spectrum and PSpice Models: <http://www.infineon.com/igbt/>
- Easy parallel switching capability due to positive temperature coefficient in  $V_{CEsat}$
- High ruggedness and stable temperature behavior
- Low EMI
- Pb-free lead plating; RoHS compliant
- Powerful monolithic reverse-conducting diode with low forward voltage
- Very low  $V_{CEsat}$  and low  $E_{off}$
- Very tight parameter distribution

### Potential applications


- Induction Cooking
- Microwave Ovens

### Product validation

- Product Validation: Qualified for industrial applications according to the relevant tests of JEDEC47/20/22

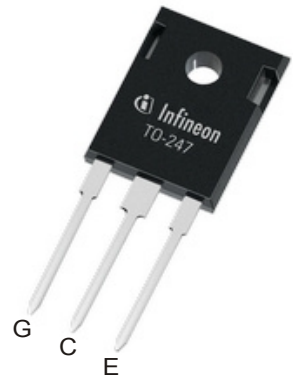

### Description

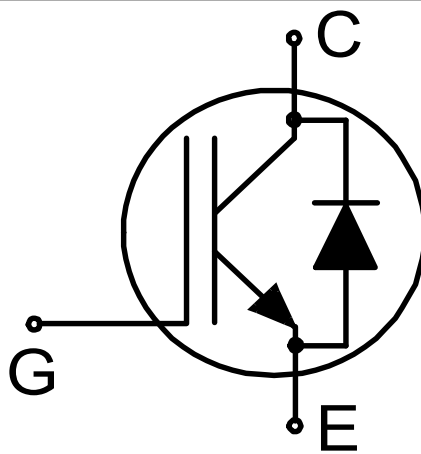

Type	Package	Marking
IHW40N65R6	PG-TO247-3	H40ER6

## Table of contents

	<b>Description</b> .....	1
	<b>Features</b> .....	1
	<b>Potential applications</b> .....	1
	<b>Product validation</b> .....	1
	<b>Table of contents</b> .....	2
<b>1</b>	<b>Package</b> .....	3
<b>2</b>	<b>IGBT</b> .....	3
<b>3</b>	<b>Diode</b> .....	6
<b>4</b>	<b>Characteristics diagrams</b> .....	8
<b>5</b>	<b>Package outlines</b> .....	14
<b>6</b>	<b>Testing conditions</b> .....	15
	<b>Revision history</b> .....	16
	<b>Disclaimer</b> .....	17

## 1 Package

**Table 1** Characteristic Values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Internal emitter inductance measured 5mm. (0.197in) from case	$L_E$			13.0		nH
Storage temperature	$T_{stg}$		-55		150	°C
Soldering temperature		wave soldering 1.6mm (0.063in.) from case for 10s			260	°C
Mounting torque , M3 screw Maximum of mounting process: 3	$M$				0.6	Nm
Thermal resistance, junction-ambient	$R_{th(j-a)}$				40	K/W

## 2 IGBT

**Table 2** Maximum Rated Values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter voltage	$V_{CE}$	$T_{vj} \geq 25\text{ °C}$			650	V
DC collector current, limited by $T_{vjmax}$	$I_C$				83.0	A
					$T_C = 100\text{ °C}$	
Pulsed collector current, $t_p$ limited by $T_{vjmax}$	$I_{Cpuls}$				120.0	A
Turn-off safe operating area		$V_{CE} \leq 650\text{ V},$ $t_p \leq 1\text{ }\mu\text{s},$ $T_{vj} \leq 175\text{ °C}$			120.0	A
Gate-emitter voltage	$V_{GE}$			$\pm 20$		V
Transient gate-emitter voltage	$V_{GE}$	$t_p = 10\text{ }\mu\text{s},$ $D < 0.010$		$\pm 30$		V
Power dissipation	$P_{tot}$				210.0	W
					$T_C = 100\text{ °C}$	

**Table 3 Characteristic Values**

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Collector-emitter breakdown voltage	$V_{BRCES}$	$I_C = 0.2 \text{ mA}$ , $V_{GE} = 0 \text{ V}$		650			V
Collector-emitter saturation voltage	$V_{CE \text{ sat}}$	$V_{GE} = 15 \text{ V}$	$I_C = 40.0 \text{ A}$ , $T_{vj} = 25 \text{ }^\circ\text{C}$		1.29	1.60	V
			$I_C = 40.0 \text{ A}$ , $T_{vj} = 175 \text{ }^\circ\text{C}$		1.50		
Gate-emitter threshold voltage	$V_{GEth}$	$I_C = 0.40 \text{ mA}$ , $V_{CE} = V_{GE}$		3.20	4.00	4.80	V
Zero gate voltage collector current	$I_{CES}$	$V_{GE} = 0 \text{ V}$	$V_{CE} = 650 \text{ V}$ , $T_{vj} = 25 \text{ }^\circ\text{C}$			40	$\mu\text{A}$
			$V_{CE} = 650 \text{ V}$ , $T_{vj} = 175 \text{ }^\circ\text{C}$		1000		
Gate-emitter leakage current	$I_{GES}$	$V_{CE} = 0 \text{ V}$ , $V_{GE} = 20 \text{ V}$				100	nA
Transconductance	$g_{fs}$	$I_C = 40.0 \text{ A}$ , $V_{CE} = 20 \text{ V}$			97.0		S
Input capacitance	$C_{ies}$	$V_{CE} = 25 \text{ V}$ , $V_{GE} = 0 \text{ V}$ , $f = 1000 \text{ kHz}$			3990		pF
Output capacitance	$C_{oes}$	$V_{CE} = 25 \text{ V}$ , $V_{GE} = 0 \text{ V}$ , $f = 1000 \text{ kHz}$			42		pF
Reverse transfer capacitance	$C_{res}$	$V_{CE} = 25 \text{ V}$ , $V_{GE} = 0 \text{ V}$ , $f = 1000 \text{ kHz}$			16		pF
Gate charge	$Q_G$	$I_C = 40.0 \text{ A}$ , $V_{GE} = 15 \text{ V}$ , $V_{CE} = 520 \text{ V}$			159.0		nC
Turn-on delay time	$t_{don}$	$V_{CE} = 400 \text{ V}$ , $V_{GE} = 15 \text{ V}$ , $R_{Gon} = 10.0 \text{ } \Omega$ , $R_{Goff} = 10.0 \text{ } \Omega$ , $L_\sigma = 70 \text{ nH}$ , $C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ }^\circ\text{C}$ , $I_C = 40.0 \text{ A}$		17		ns
			$T_{vj} = 175 \text{ }^\circ\text{C}$ , $I_C = 40.0 \text{ A}$		17		

**Table 3 Characteristic Values (continued)**

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Rise time (inductive load)	$t_r$	$V_{CE} = 400\text{ V},$ $V_{GE} = 15\text{ V},$ $R_{Gon} = 10.0\ \Omega,$ $R_{Goff} = 10.0\ \Omega,$ $L_\sigma = 70\text{ nH},$ $C_\sigma = 30\text{ pF}$	$T_{vj} = 25\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	19		ns
			$T_{vj} = 175\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	19		
Turn-off delay time	$t_{doff}$	$V_{CE} = 400\text{ V},$ $V_{GE} = 15\text{ V},$ $R_{Gon} = 10.0\ \Omega,$ $R_{Goff} = 10.0\ \Omega,$ $L_\sigma = 70\text{ nH},$ $C_\sigma = 30\text{ pF}$	$T_{vj} = 25\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	211		ns
			$T_{vj} = 175\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	236		
Fall time (inductive load)	$t_f$	$V_{CE} = 400\text{ V},$ $V_{GE} = 15\text{ V},$ $R_{Gon} = 10.0\ \Omega,$ $R_{Goff} = 10.0\ \Omega,$ $L_\sigma = 70\text{ nH},$ $C_\sigma = 30\text{ pF}$	$T_{vj} = 25\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	15		ns
			$T_{vj} = 175\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	20		
Turn-on energy	$E_{on}$	$V_{CE} = 400\text{ V},$ $V_{GE} = 15\text{ V},$ $R_{Gon} = 10.0\ \Omega,$ $R_{Goff} = 10.0\ \Omega,$ $L_\sigma = 70\text{ nH},$ $C_\sigma = 30\text{ pF}$	$T_{vj} = 25\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	1.10		mJ
			$T_{vj} = 175\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	1.27		
Turn-off energy	$E_{off}$	$V_{CE} = 400\text{ V},$ $V_{GE} = 15\text{ V},$ $R_{Gon} = 10.0\ \Omega,$ $R_{Goff} = 10.0\ \Omega,$ $L_\sigma = 70\text{ nH},$ $C_\sigma = 30\text{ pF}$	$T_{vj} = 25\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	0.42		mJ
			$T_{vj} = 175\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	0.61		
Total switching energy	$E_{ts}$	$V_{CE} = 400\text{ V},$ $V_{GE} = 15\text{ V},$ $R_{Gon} = 10.0\ \Omega,$ $R_{Goff} = 10.0\ \Omega,$ $L_\sigma = 70\text{ nH},$ $C_\sigma = 30\text{ pF}$	$T_{vj} = 25\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	1.52		mJ
			$T_{vj} = 175\text{ }^\circ\text{C},$ $I_C = 40.0\text{ A}$	1.88		

**Table 3** Characteristic Values (continued)

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Soft turn-off energy	$E_{off}$	$V_{CE} = 400\text{ V}$ , $V_{GE} = 15\text{ V}$ , $R_{Gon} = 10.0\ \Omega$ , $R_{Goff} = 10.0\ \Omega$ , $C_r = 30\text{ nF}$ , $L_\sigma = 70\text{ nH}$ , $C_\sigma = 30\text{ pF}$	$T_{vj} = 25\text{ }^\circ\text{C}$ , $I_C = 40.0\text{ A}$		0.18	mJ
			$T_{vj} = 175\text{ }^\circ\text{C}$ , $I_C = 40.0\text{ A}$		0.30	
IGBT thermal resistance, junction-case	$R_{thjc}$				0.71	K/W
Operating junction temperature	$T_{vj}$		-40		175	$^\circ\text{C}$

### 3 Diode

**Table 4** Maximum Rated Values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Repetitive peak reverse voltage	$V_{RRM}$	$T_{vj} \geq 25\text{ }^\circ\text{C}$			650	V
Diode forward current, limited by $T_{vjmax}$	$I_F$		$T_C = 25\text{ }^\circ\text{C}$		35.0	A
			$T_C = 100\text{ }^\circ\text{C}$		21.0	
Diode pulsed current, $t_p$ limited by $T_{vjmax}$	$I_{Fpuls}$				120.0	A
Power dissipation	$P_{tot}$		$T_C = 25\text{ }^\circ\text{C}$		54.0	W
			$T_C = 100\text{ }^\circ\text{C}$		27.0	

**Table 5** Characteristic Values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Diode forward voltage	$V_F$	$I_F = 40.0\text{ A}$	$T_{vj} = 25\text{ }^\circ\text{C}$		1.50	V
			$T_{vj} = 175\text{ }^\circ\text{C}$		1.66	
Reverse leakage current	$I_R$	$V_R = 650\text{ V}$	$T_{vj} = 25\text{ }^\circ\text{C}$		40	$\mu\text{A}$
			$T_{vj} = 175\text{ }^\circ\text{C}$		1000	

**Table 5 Characteristic Values (continued)**


Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Diode reverse recovery time	$t_{rr}$	$V_R = 400\text{ V}$	$T_{vj} = 25\text{ °C},$ $I_F = 40.0\text{ A},$ $-di_F/dt = 1000\text{ A}/\mu\text{s}$		99		ns
					133		
Diode reverse recovery charge	$Q_{rr}$	$V_R = 400\text{ V}$	$T_{vj} = 25\text{ °C},$ $I_F = 40.0\text{ A},$ $-di_F/dt = 1000\text{ A}/\mu\text{s}$		2.16		$\mu\text{C}$
					3.77		
Diode peak reverse recovery current	$I_{rrm}$	$V_R = 400\text{ V}$	$T_{vj} = 25\text{ °C},$ $I_F = 40.0\text{ A},$ $-di_F/dt = 1000\text{ A}/\mu\text{s}$		35.0		A
					46.0		
Diode peak rate off fall of reverse recovery current	$di_{rr}/dt$	$V_R = 400\text{ V}$	$T_{vj} = 25\text{ °C},$ $I_F = 40.0\text{ A},$ $-di_F/dt = 1000\text{ A}/\mu\text{s}$		-926		$\text{A}/\mu\text{s}$
					-901		
Diode thermal resistance, junction-case	$R_{thjc}$					2.77	K/W
Operating junction temperature	$T_{vj}$			-40		175	$^{\circ}\text{C}$

## 4 Characteristics diagrams

### Power dissipation as a function of case temperature, IGBT

$$P_{\text{tot}} = f(T_c)$$


$$T_{vj} = \leq 175 \text{ } ^\circ\text{C}$$

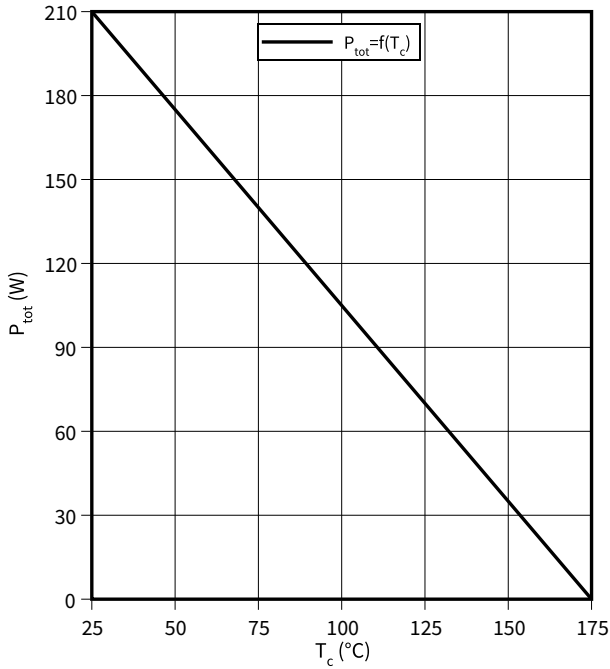

### Collector current as a function of case temperature, IGBT

$$I_c = f(T_c)$$


$$T_{vj} = \leq 175 \text{ } ^\circ\text{C}, V_{GE} = 15 \text{ V}$$

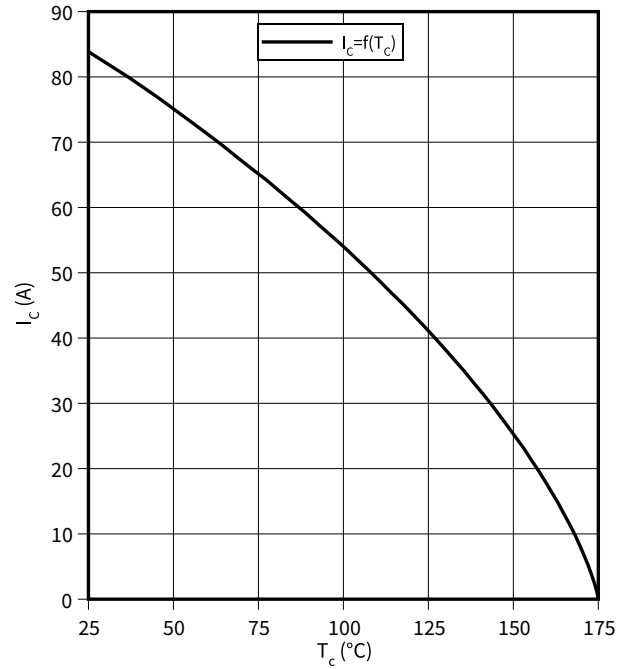

### Typical output characteristic, IGBT

$$I_c = f(V_{CE})$$


$$T_{vj} = 25 \text{ } ^\circ\text{C}$$

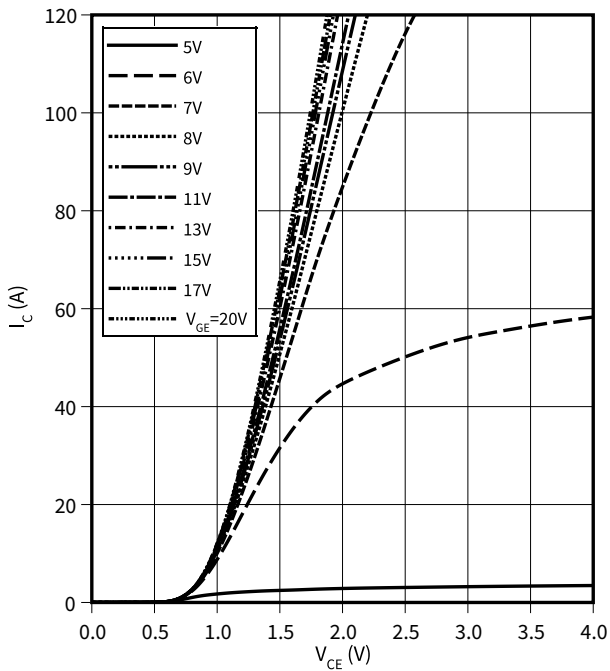

### Typical output characteristic, IGBT

$$I_c = f(V_{CE})$$

$$T_{vj} = 175 \text{ } ^\circ\text{C}$$

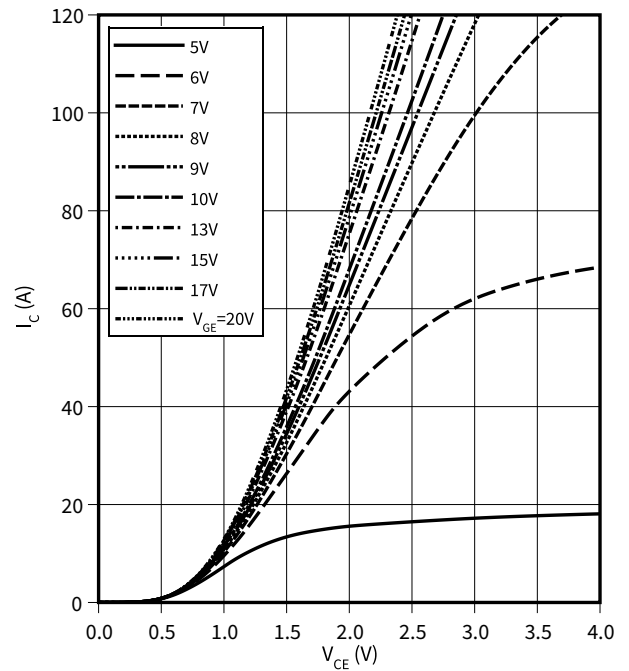




4 Characteristics diagrams


**Typical transfer characteristic, IGBT**

$I_C = f(V_{GE})$   
 $V_{CE} = 20\text{ V}$

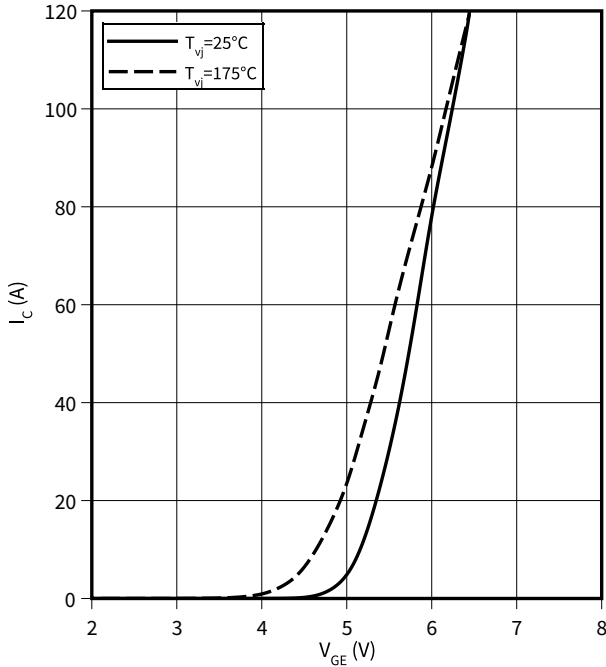


**Typical collector-emitter saturation voltage as a function of junction temperature, IGBT**

$V_{CEsat} = f(T_{vj})$   
 $V_{GE} = 15\text{ V}$

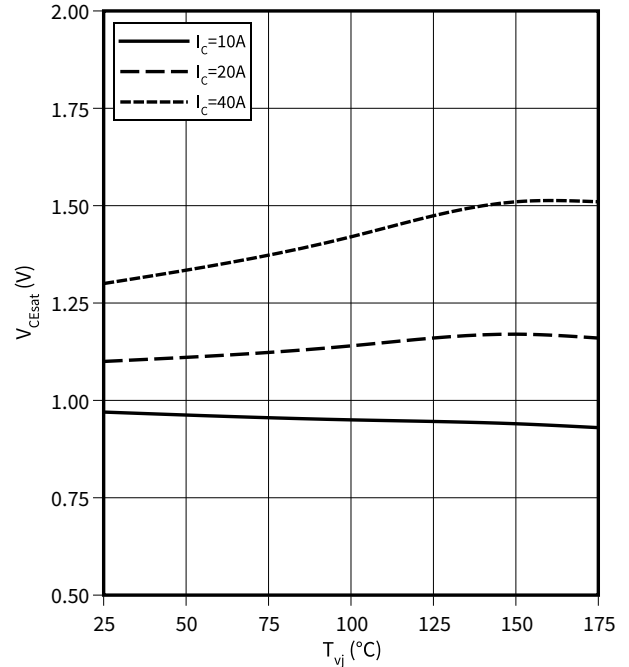


**Typical switching times as a function of collector current, IGBT**

$t = f(I_C)$   
 $R_{Goff} = 10.0\ \Omega$ ,  $V_{CE} = 400\text{ V}$ ,  $T_{vj} = 175^\circ\text{C}$ ,  $V_{GE} = 0/15\text{ V}$ ,  $R_{Gon} = 10.0\ \Omega$

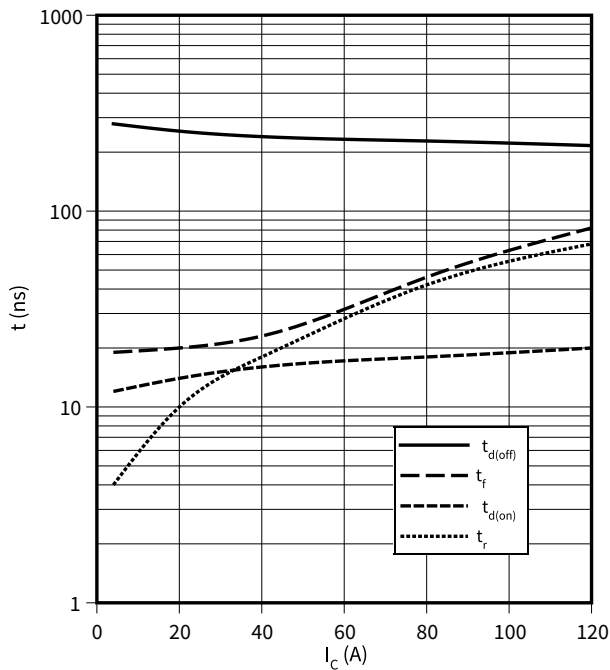

**Typical switching times as a function of gate resistor, IGBT**

$t = f(R_G)$   
 $I_C = 40.0\text{ A}$ ,  $V_{CE} = 400\text{ V}$ ,  $T_{vj} = 175^\circ\text{C}$ ,  $V_{GE} = 0/15\text{ V}$

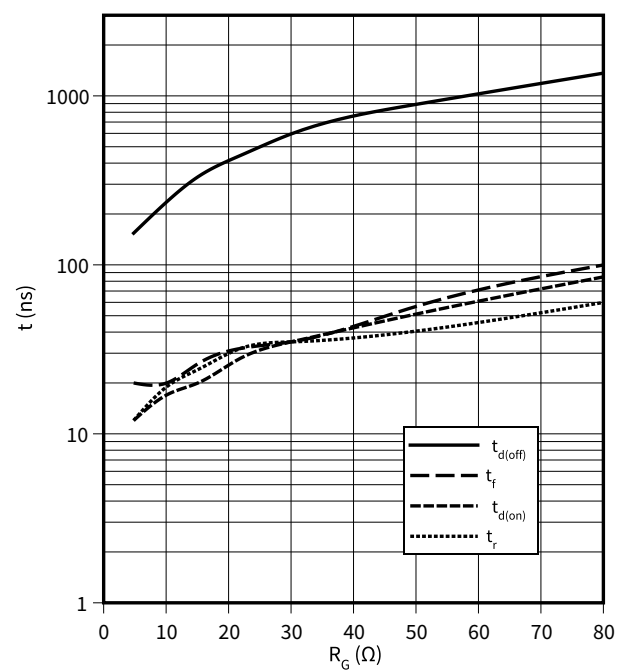


4 Characteristics diagrams

**Typical switching times as a function of junction temperature, IGBT**

$t = f(T_{vj})$


$I_C = 40.0 \text{ A}$ ,  $R_{Goff} = 10.0 \text{ } \Omega$ ,  $V_{CE} = 400 \text{ V}$ ,  $V_{GE} = 0/15 \text{ V}$ ,  $R_{Gon} = 10.0 \text{ } \Omega$

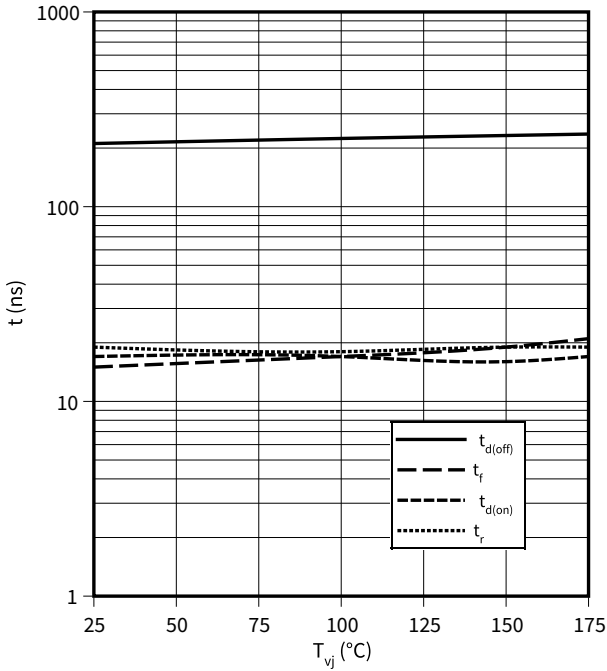

**Gate-emitter threshold voltage as a function of junction temperature, IGBT**

$V_{GEth} = f(T_{vj})$


$I_C = 0.40 \text{ mA}$

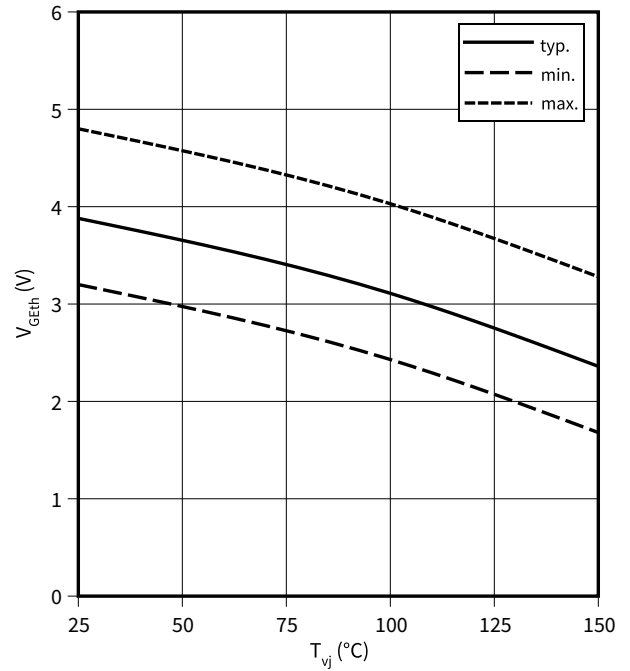

**Typical switching energy losses as a function of collector current, IGBT**

$E = f(I_C)$


$R_{Goff} = 10.0 \text{ } \Omega$ ,  $V_{CE} = 400 \text{ V}$ ,  $T_{vj} = 175 \text{ } ^\circ\text{C}$ ,  $V_{GE} = 0/15 \text{ V}$ ,  $R_{Gon} = 10.0 \text{ } \Omega$

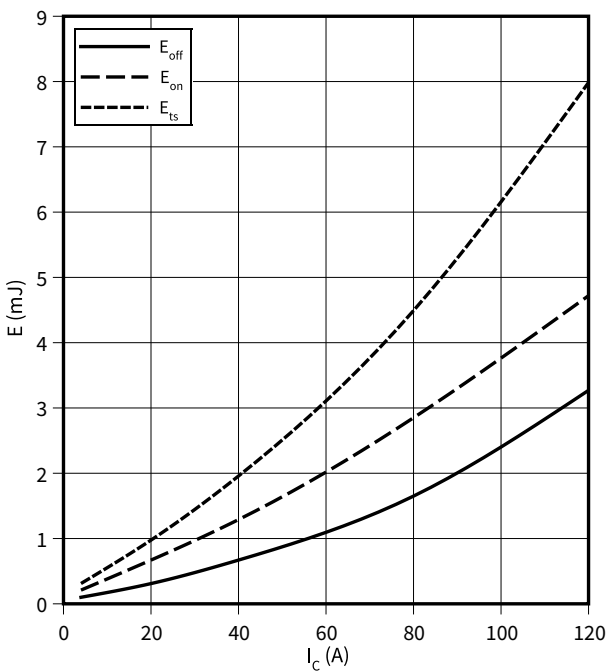

**Typical switching energy losses as a function of gate resistor, IGBT**

$E = f(R_G)$

$I_C = 40.0 \text{ A}$ ,  $V_{CE} = 400 \text{ V}$ ,  $T_{vj} = 175 \text{ } ^\circ\text{C}$ ,  $V_{GE} = 0/15 \text{ V}$

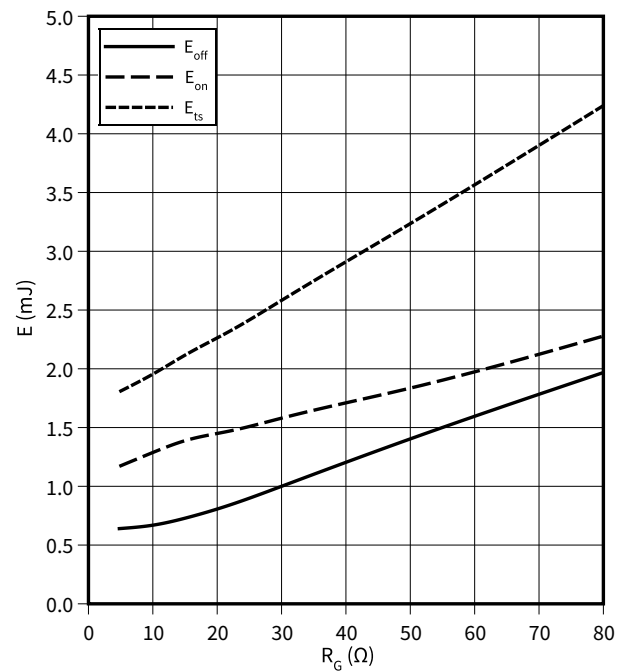


4 Characteristics diagrams

**Typical switching energy losses as a function of junction temperature, IGBT**

$E = f(T_{vj})$


$I_C = 40.0 \text{ A}$ ,  $R_{Goff} = 10.0 \text{ } \Omega$ ,  $V_{CE} = 400 \text{ V}$ ,  $V_{GE} = 0/15 \text{ V}$ ,  $R_{Gon} = 10.0 \text{ } \Omega$

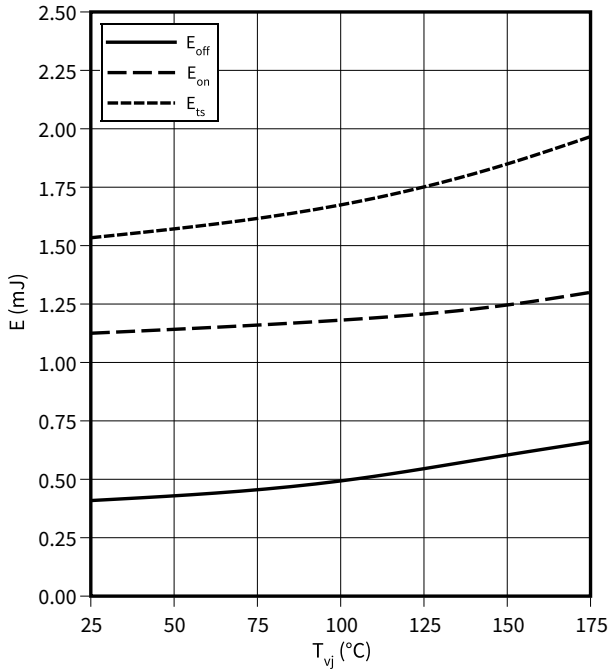

**Typical soft-switching turn-off energy loss as a function of collector current, IGBT**

$E = f(I_C)$


$R_{Goff} = 10.0 \text{ } \Omega$ ,  $V_{CE} = 400 \text{ V}$ ,  $V_{GE} = 15 \text{ V}$ ,  $T_{vj} = 175 \text{ } ^\circ\text{C}$ ,  $R_{Gon} = 10.0 \text{ } \Omega$

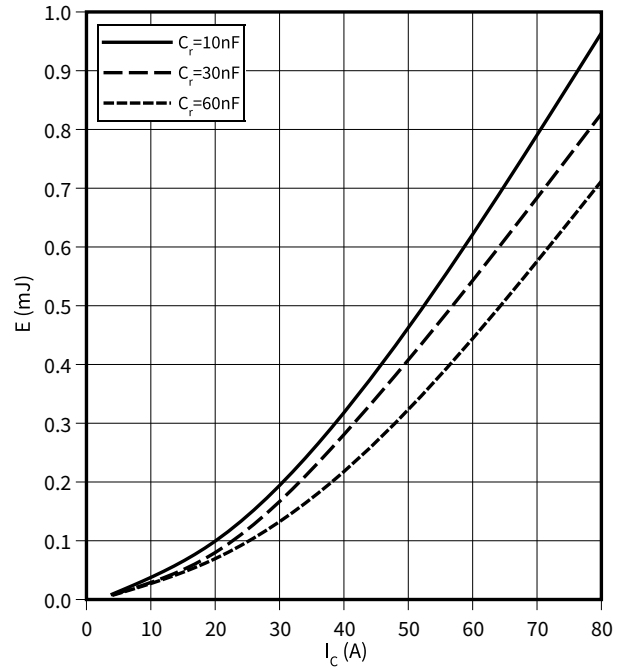

**Typical gate charge, IGBT**

$V_{GE} = f(Q_{GE})$


$I_C = 40.0 \text{ A}$

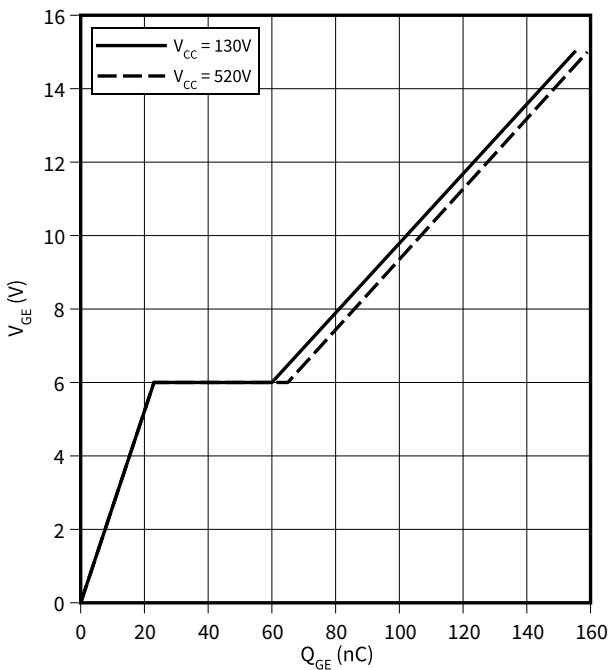

**Typical capacitance as a function of collector-emitter voltage, IGBT**

$C = f(V_{CE})$


$f = 1000 \text{ kHz}$ ,  $V_{GE} = 0 \text{ V}$

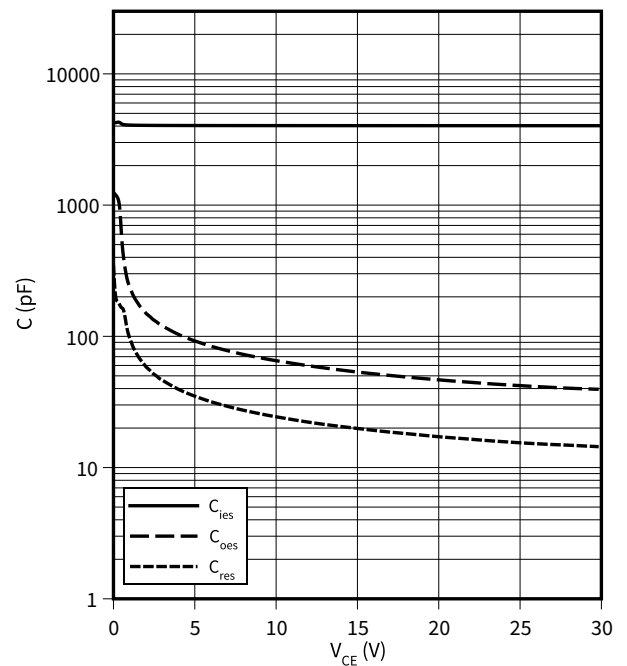

4 Characteristics diagrams


**IGBT transient thermal resistance, IGBT**

$Z_{th} = f(t_p)$   
 $D = t_p/T$

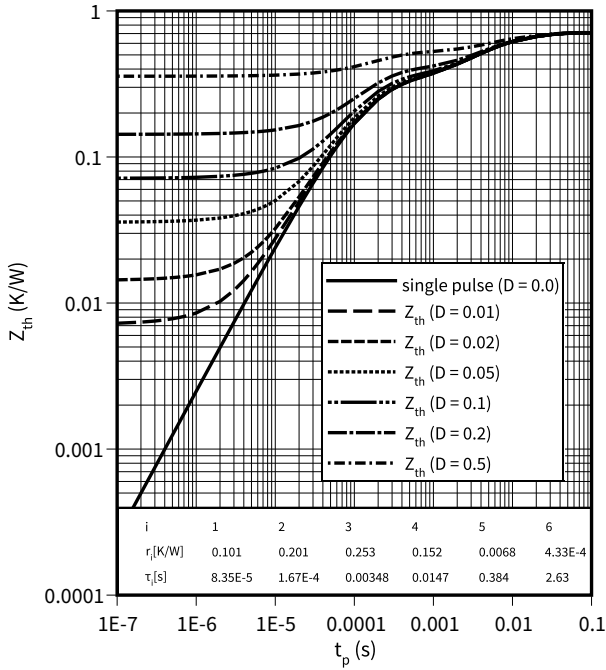


**Diode transient thermal impedance as a function of pulse width, Diode**

$Z_{th} = f(t_p)$   
 $D = t_p/T$

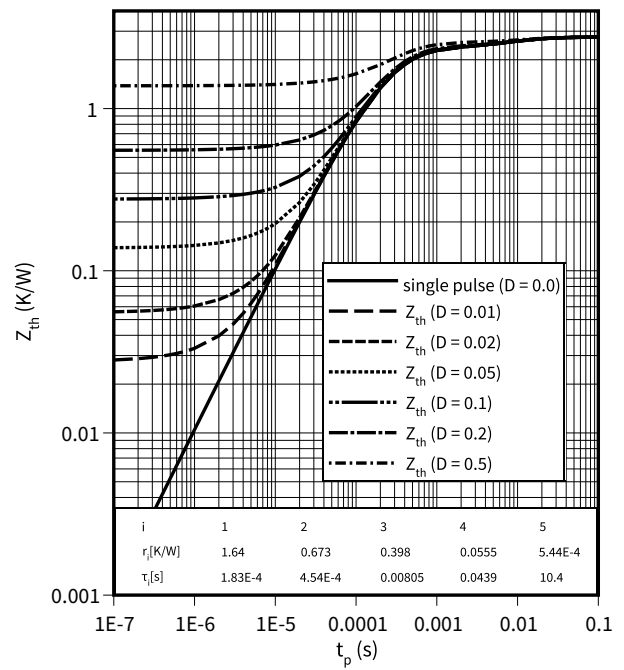


**Typical reverse recovery time as a function of diode current slope, Diode**

$t_{rr} = f(di_F/dt)$   
 $V_R = 400 V$

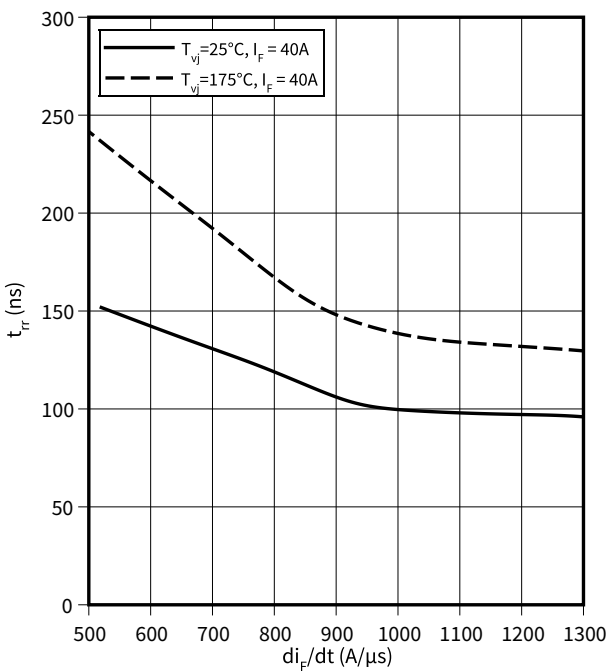

**Typical reverse recovery charge as a function of diode current slope, Diode**


$Q_{rr} = f(di_F/dt)$   
 $V_R = 400 V$

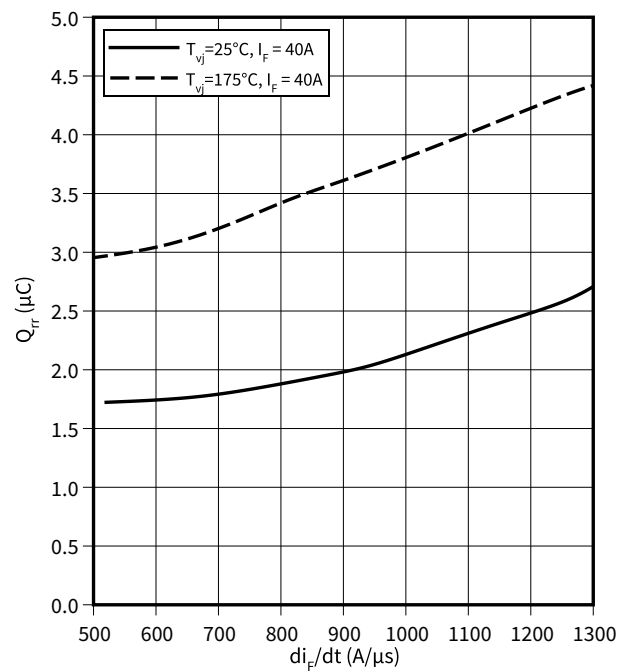

4 Characteristics diagrams


**Typical reverse recovery current as a function of diode current slope, Diode**

$I_{rr} = f(di_F/dt)$   
 $V_R = 400\text{ V}$

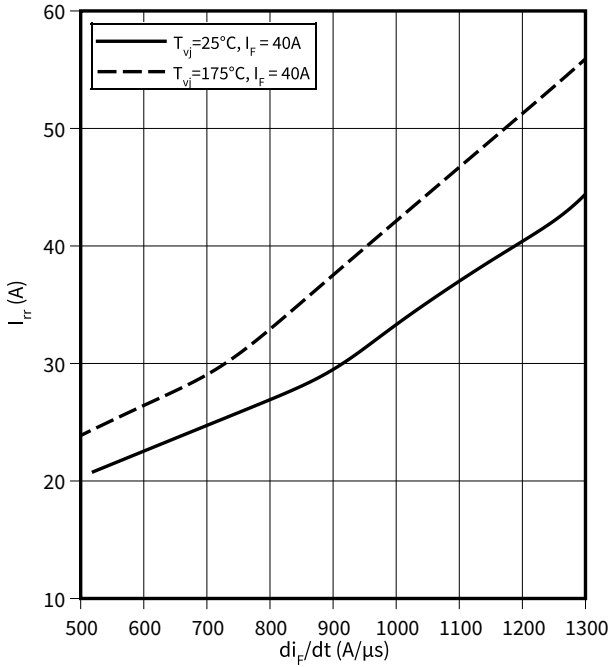


**Typical diode peak rate of fall of reverse recovery current as a function of diode current slope, Diode**

$dI_{rr}/dt = f(di_F/dt)$   
 $V_R = 400\text{ V}$

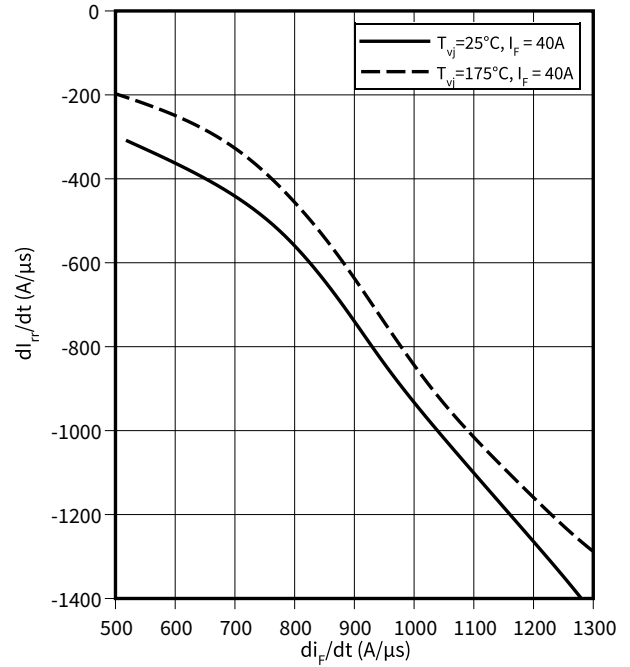


**Typical diode forward current as a function of forward voltage, Diode**

$I_F = f(V_F)$

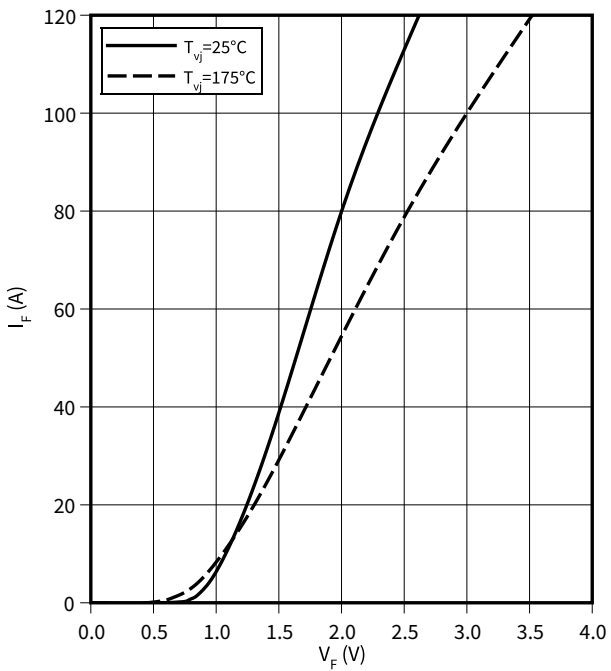

**Typical diode forward voltage as a function of junction temperature, Diode**

$V_F = f(T_{vj})$

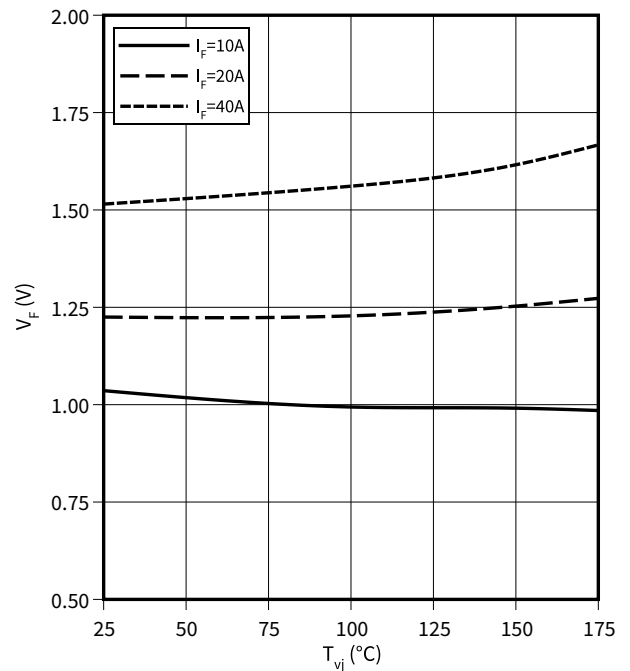

5 Package outlines

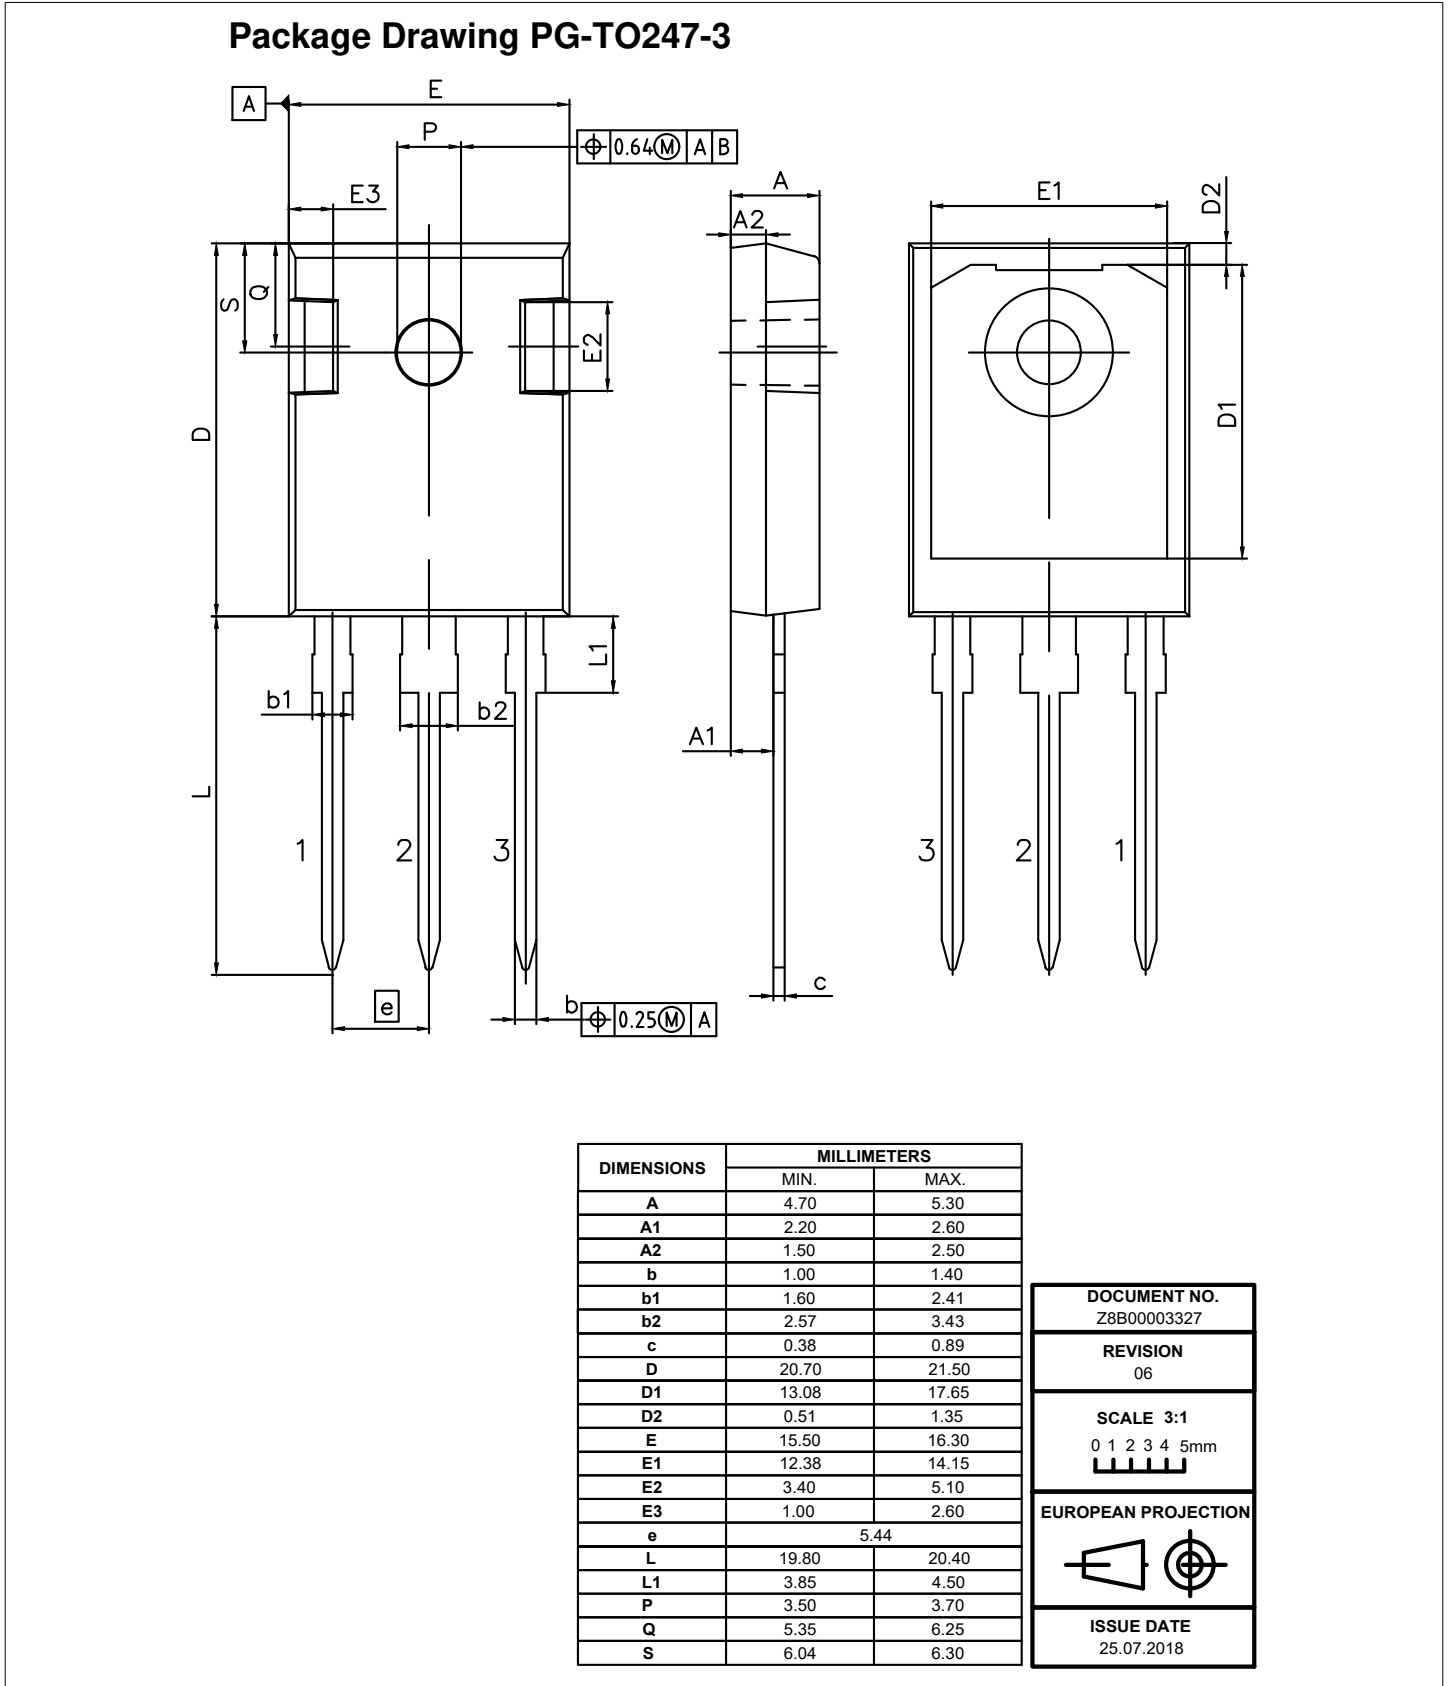


Figure 6

## 6 Testing conditions

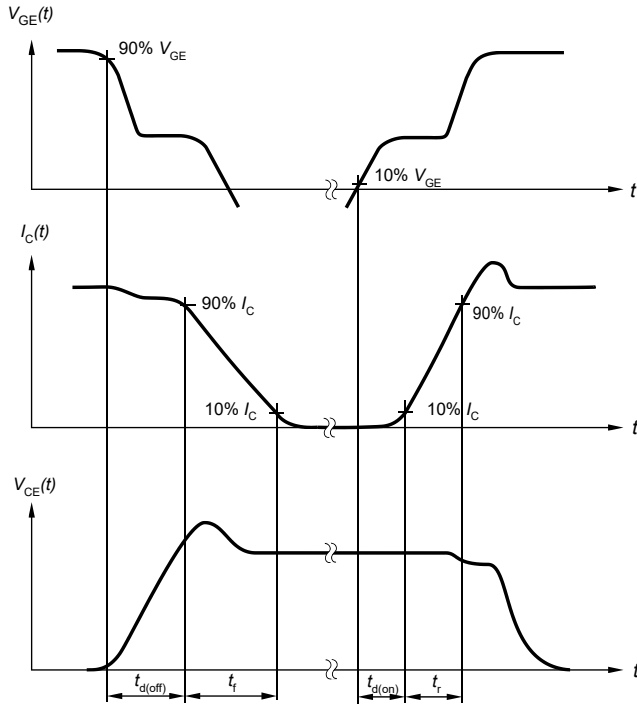


Figure A. Definition of switching times

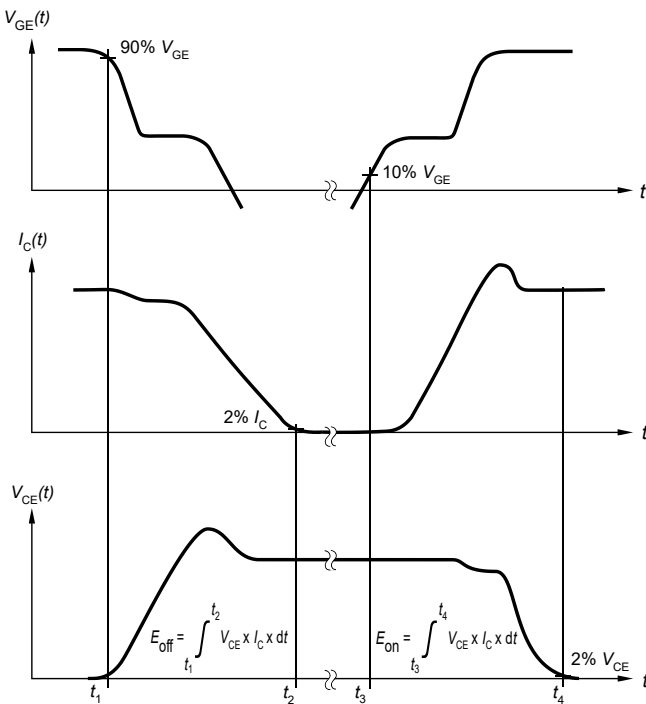


Figure B. Definition of switching losses

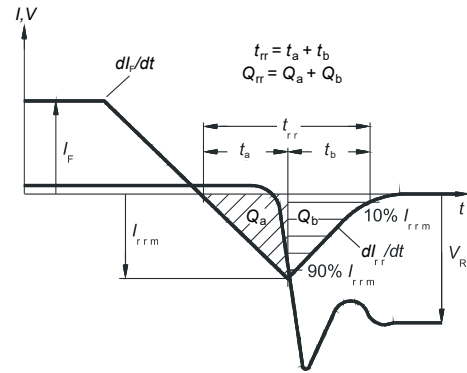


Figure C. Definition of diode switching characteristics

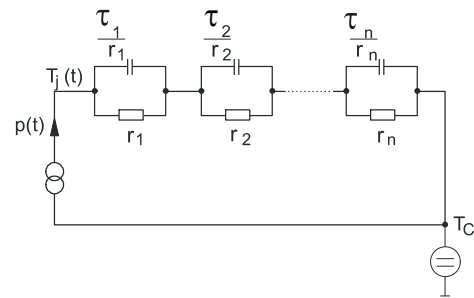


Figure D. Thermal equivalent circuit

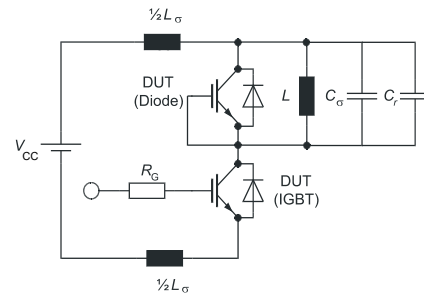


Figure E. Dynamic test circuit  
Parasitic inductance  $L_{\sigma}$ ,  
parasitic capacitor  $C_{\sigma}$ ,  
relief capacitor  $C_r$ ,  
(only for ZVT switching)

Figure 7

---

Revision history

## Revision history

<b>Document version</b>	<b>Date of release</b>	<b>Description of changes</b>
V2.10	2020-02-08	Fixed Zth diagrams. Fixed link.
V1.00	2020-12-21	Final datasheet



## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2021-02-08**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2021 Infineon Technologies AG**

**All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

**IFX-**

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Please note that this product is not qualified according to the AEC Q100 or AEC Q101 documents of the Automotive Electronics Council.

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IGBT Transistors](#) category:*

*Click to view products by [Infineon](#) manufacturer:*

Other Similar products are found below :

[IRG4PC30W](#) [APT20GT60BRDQ1G](#) [STGWA25H120DF2](#) [APT30GS60BRDQ2G](#) [TIG058E8-TL-H](#) [IDW40E65D2](#) [STGB40V60F](#)  
[STGWA25H120F2](#) [NGTB75N65FL2WAG](#) [2MBI150VA-060-50](#) [NTE3320](#) [FGD3040G2-F085](#) [FGD3440G2-F085](#) [STGW80H65DFB-4](#)  
[AFGY160T65SPD-B4](#) [IGW30N60TP](#) [IGW40N60TP](#) [IGW50N60TP](#) [IHW30N65R5](#) [IKFW40N60DH3E](#) [IKP15N65H5](#) [IKQ100N60T](#)  
[IKQ120N60T](#) [IKW30N65WR5](#) [IKW75N60H3](#) [IKZ50N65NH5](#) [IKZ75N65NH5](#) [FGD3040G2-F085C](#) [FGH4L50T65SQD](#) [FGHL40T65MQDT](#)  
[FGHL50T65MQD](#) [FGHL50T65MQDTL4](#) [FGHL75T65LQDT](#) [FGHL75T65MQD](#) [FGHL75T65MQDT](#) [FGHL75T65MQDTL4](#)  
[FGY75T120SWD](#) [EL3120S1\(TA\)\(SAS\)-V](#) [IHW15N120E1](#) [IKQ75N120CS6](#) [IKA08N65ET6](#) [IKW50N65WR5](#) [SL15T65FK](#)  
[KGF50N65KDF-U/H](#) [IHF40N65R5S](#) [IKQ75N120CH3](#) [IHW30N160R5](#) [SGM100HF12A1TFD](#) [CRG50T60AK3SD](#) [CRG40T60AN3S](#)