
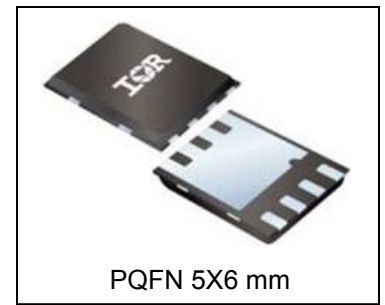


HEXFET® Power MOSFET

|  |             |           |
|--|-------------|-----------|
| <b>V<sub>DSS</sub></b>                                     | <b>100</b>  | <b>V</b>  |
| <b>R<sub>DS(on)</sub> max</b><br>(@ V <sub>GS</sub> = 10V) | <b>16.4</b> | <b>mΩ</b> |
| <b>Q<sub>g</sub> (typical)</b>                             | <b>13</b>   | <b>nC</b> |
| <b>R<sub>g</sub> (typical)</b>                             | <b>2.1</b>  | <b>Ω</b>  |
| <b>I<sub>D</sub></b><br>(@T <sub>C(Bottom)</sub> = 25°C)   | <b>35</b>   | <b>A</b>  |



**Applications**

- Primary Switch for High Frequency 48V/60V Telecom DC-DC Power Supplies
- Secondary Side Synchronous Rectifier

**Features**

|   |
|---|
| Low R <sub>DS(ON)</sub> (< 16.4mΩ)                |
| Low Thermal Resistance to PCB (<3.2°C/W)          |
| 100% R <sub>g</sub> Tested                        |
| Low Profile (<1.05 mm)                            |
| Industry-Standard Pinout                          |
| Compatible with Existing Surface Mount Techniques |
| RoHS Compliant, Halogen-Free                      |
| MSL1  |

results in  
⇒

**Benefits**

|                            |
|----------------------------|
| Lower Conduction Losses    |
| Increased Power Density    |
| Increased Reliability      |
| Increased Power Density    |
| Multi-Vendor Compatibility |
| Easier Manufacturing       |
| Environmentally Friendlier |
| Increased Reliability      |

| Base part number | Package Type    | Standard Pack |          | Orderable Part Number |
|------------------|-----------------|---------------|----------|-----------------------|
|                  |                 | Form          | Quantity |                       |
| IRFH7194PbF      | PQFN 5mm x 6 mm | Tape and Reel | 4000     | IRFH7194TRPbF         |

**Absolute Maximum Ratings**


|   | Parameter                                       | Max.         | Units |
|---|---|--------------|-------|
| V <sub>GS</sub>                                 | Gate-to-Source Voltage                          | ± 20         | V     |
| I <sub>D</sub> @ T <sub>A</sub> = 25°C          | Continuous Drain Current, V <sub>GS</sub> @ 10V | 11           | A     |
| I <sub>D</sub> @ T <sub>C(Bottom)</sub> = 25°C  | Continuous Drain Current, V <sub>GS</sub> @ 10V | 35           |       |
| I <sub>D</sub> @ T <sub>C(Bottom)</sub> = 100°C | Continuous Drain Current, V <sub>GS</sub> @ 10V | 22           |       |
| I <sub>DM</sub>                                 | Pulsed Drain Current ①                          | 140          |       |
| P <sub>D</sub> @ T <sub>A</sub> = 25°C          | Power Dissipation                               | 3.6          | W     |
| P <sub>D</sub> @ T <sub>C(Bottom)</sub> = 25°C  | Power Dissipation                               | 39           |       |
|   | Linear Derating Factor                          | 0.03         | W/°C  |
| T <sub>J</sub>                                  | Operating Junction and                          | -55 to + 150 | °C    |
| T <sub>STG</sub>                                | Storage Temperature Range                       |              |       |

Notes ① through ⑤ are on page 8

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

|                              | Parameter                            | Min. | Typ. | Max. | Units         | Conditions   |
|------------------------------|--------------------------------------|------|------|------|---------------|--|
| $BV_{DSS}$                   | Drain-to-Source Breakdown Voltage    | 100  | —    | —    | V             | $V_{GS} = 0V, I_D = 250\mu\text{A}$                              |
| $\Delta BV_{DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 78   | —    | mV/°C         | Reference to $25^\circ\text{C}, I_D = 1\text{mA}$                |
| $R_{DS(on)}$                 | Static Drain-to-Source On-Resistance | —    | 13.7 | 16.4 | m $\Omega$    | $V_{GS} = 10V, I_D = 21A$ ③                                      |
| $V_{GS(th)}$                 | Gate Threshold Voltage               | 2.0  | —    | 3.6  | V             | $V_{DS} = V_{GS}, I_D = 50\mu\text{A}$                           |
| $\Delta V_{GS(th)}$          | Gate Threshold Voltage Coefficient   | —    | -5.2 | —    | mV/°C         |  |
| $I_{DSS}$                    | Drain-to-Source Leakage Current      | —    | —    | 1.0  | $\mu\text{A}$ | $V_{DS} = 80V, V_{GS} = 0V$                                      |
| $I_{GSS}$                    | Gate-to-Source Forward Leakage       | —    | —    | 100  | nA            | $V_{GS} = 20V$   |
|                              | Gate-to-Source Reverse Leakage       | —    | —    | -100 | nA            | $V_{GS} = -20V$  |
| $g_{fs}$                     | Forward Transconductance             | 45   | —    | —    | S             | $V_{DS} = 25V, I_D = 21A$  |
| $Q_g$                        | Total Gate Charge                    | —    | 13   | 19   | nC            | $V_{DS} = 50V$<br>$V_{GS} = 10V$<br>$I_D = 21A$                  |
| $Q_{gs1}$                    | Pre-Vth Gate-to-Source Charge        | —    | 1.8  | —    |               |  |
| $Q_{gs2}$                    | Post-Vth Gate-to-Source Charge       | —    | 0.9  | —    |               |  |
| $Q_{gd}$                     | Gate-to-Drain Charge                 | —    | 4.3  | —    |               |  |
| $Q_{godr}$                   | Gate Charge Overdrive                | —    | 6.0  | —    |               |  |
| $Q_{sw}$                     | Switch Charge ( $Q_{gs2} + Q_{gd}$ ) | —    | 5.2  | —    |               |  |
| $Q_{oss}$                    | Output Charge                        | —    | 40   | —    | nC            | $V_{DS} = 50V, V_{GS} = 0V$                                      |
| $R_G$                        | Gate Resistance                      | —    | 2.1  | —    | $\Omega$      |  |
| $t_{d(on)}$                  | Turn-On Delay Time                   | —    | 2.7  | —    | ns            | $V_{DD} = 50V, V_{GS} = 10V$<br>$I_D = 21A$<br>$R_G = 1.0\Omega$ |
| $t_r$                        | Rise Time                            | —    | 3.3  | —    |               |  |
| $t_{d(off)}$                 | Turn-Off Delay Time                  | —    | 8.0  | —    |               |  |
| $t_f$                        | Fall Time                            | —    | 2.5  | —    |               |  |
| $C_{iss}$                    | Input Capacitance                    | —    | 733  | —    | pF            | $V_{GS} = 0V$<br>$V_{DS} = 50V$<br>$f = 1.0\text{MHz}$           |
| $C_{oss}$                    | Output Capacitance                   | —    | 374  | —    |               |  |
| $C_{rss}$                    | Reverse Transfer Capacitance         | —    | 11   | —    |               |  |

**Diode Characteristics**


|          | Parameter                              | Min. | Typ. | Max. | Units | Conditions   |
|----------|--|------|------|------|-------|--|
| $I_S$    | Continuous Source Current (Body Diode) | —    | —    | 35   | A     | MOSFET symbol showing the integral reverse p-n junction diode.  |
| $I_{SM}$ | Pulsed Source Current (Body Diode) ①   | —    | —    | 140  | A     |  |
| $V_{SD}$ | Diode Forward Voltage                  | —    | 0.8  | 1.3  | V     | $T_J = 25^\circ\text{C}, I_S = 21A, V_{GS} = 0V$ ③   |
| $t_{rr}$ | Reverse Recovery Time                  | —    | 30   | 45   | ns    | $T_J = 25^\circ\text{C}, I_F = 21A, V_{DD} = 50V$  |
| $Q_{rr}$ | Reverse Recovery Charge                | —    | 26   | 39   | nC    | $di/dt = 100A/\mu\text{s}$ ③   |

**Avalanche Characteristics**


|                              | Parameter                       | Typ. | Max. | Units |
|------------------------------|---------------------------------|------|------|-------|
| $E_{AS}$ (Thermally limited) | Single Pulse Avalanche Energy ② | —    | 220  | mJ    |
| $I_{AR}$                     | Avalanche Current ①             | —    | 12   | A     |

**Thermal Resistance**


|                          | Parameter             | Typ. | Max. | Units |
|--------------------------|-----------------------|------|------|-------|
| $R_{\theta JC}$ (Bottom) | Junction-to-Case ④    | —    | 3.2  | °C/W  |
| $R_{\theta JC}$ (Top)    | Junction-to-Case ④    | —    | 22   |       |
| $R_{\theta JA}$          | Junction-to-Ambient ⑤ | —    | 35   |       |
| $R_{\theta JA}$ (<10s)   | Junction-to-Ambient ⑤ | —    | 20   |       |

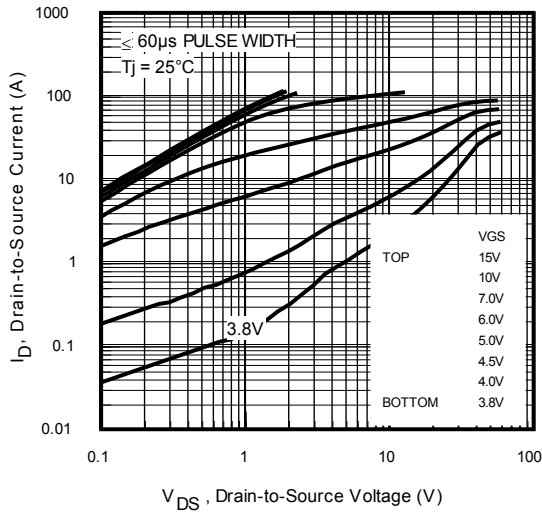


**Fig 1. Typical Output Characteristics**

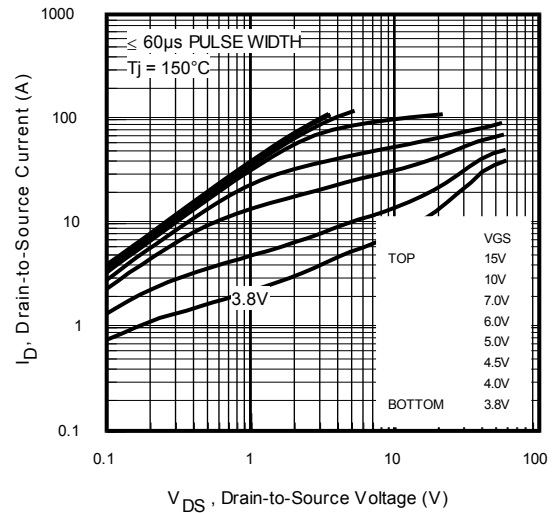


**Fig 2. Typical Output Characteristics**

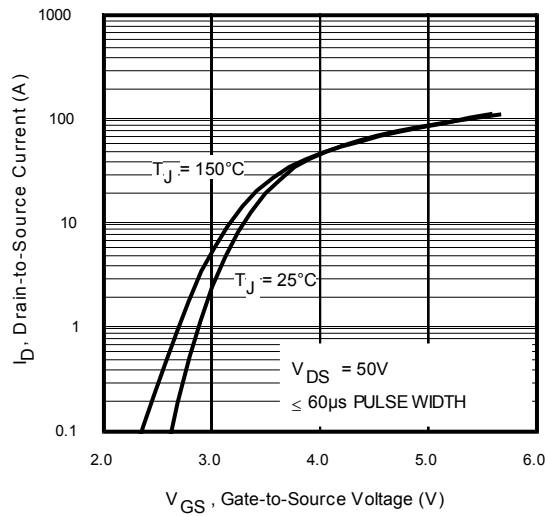


**Fig 3. Typical Transfer Characteristics**

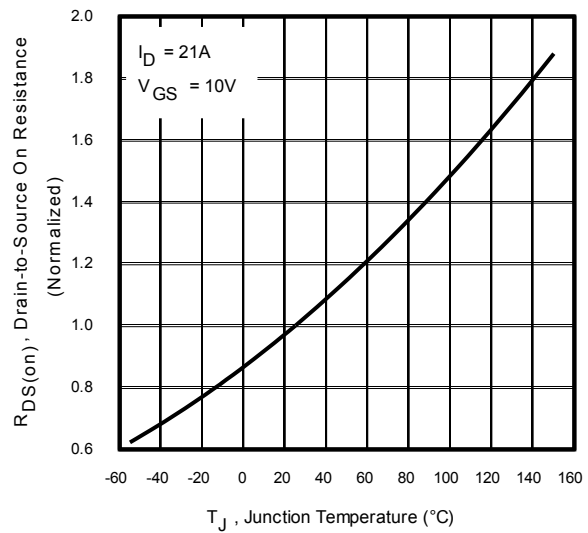






**Fig 4. Normalized On-Resistance vs. Temperature**

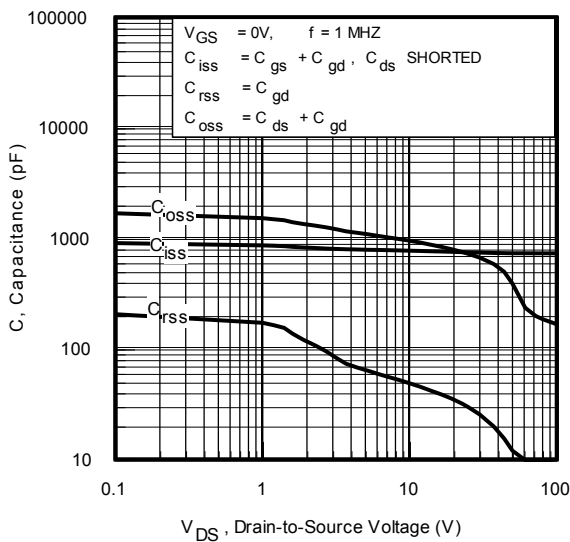

**Fig 5. Typical Capacitance vs. Drain-to-Source Voltage**

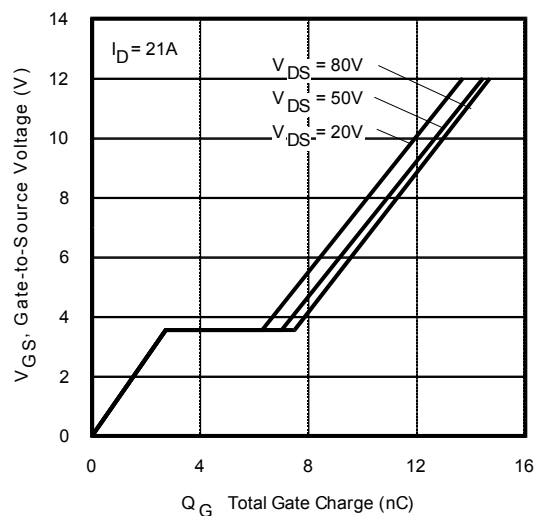

**Fig 6. Typical Gate Charge vs. Gate-to-Source Voltage**

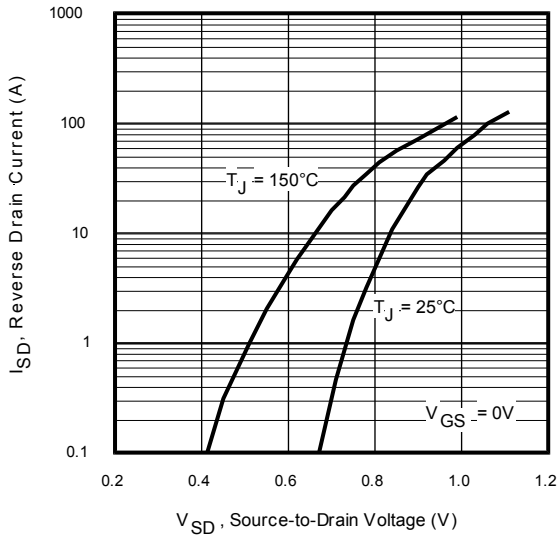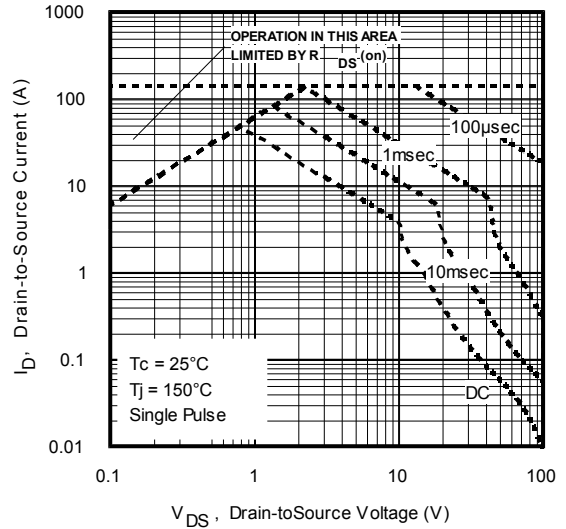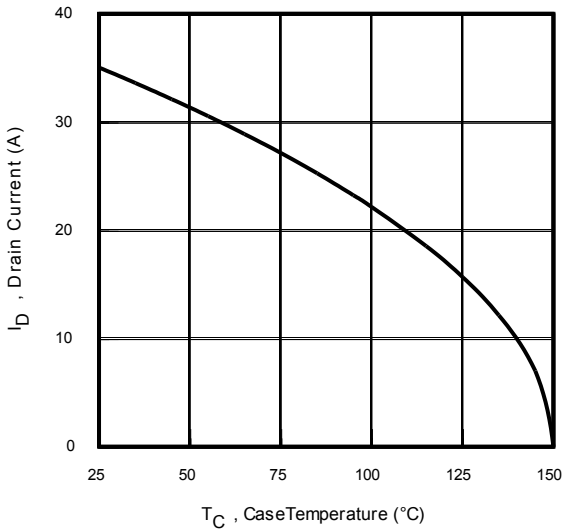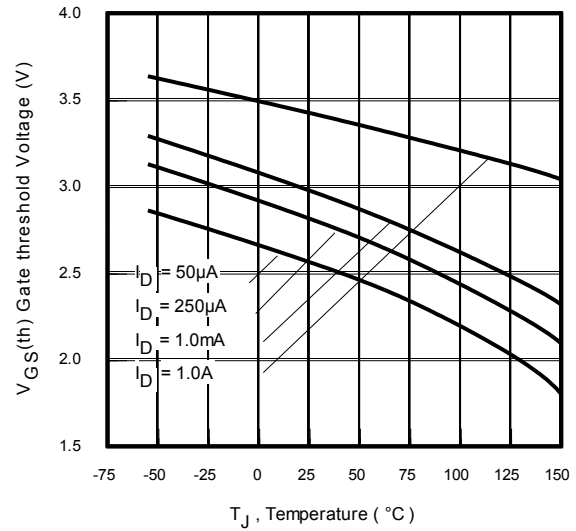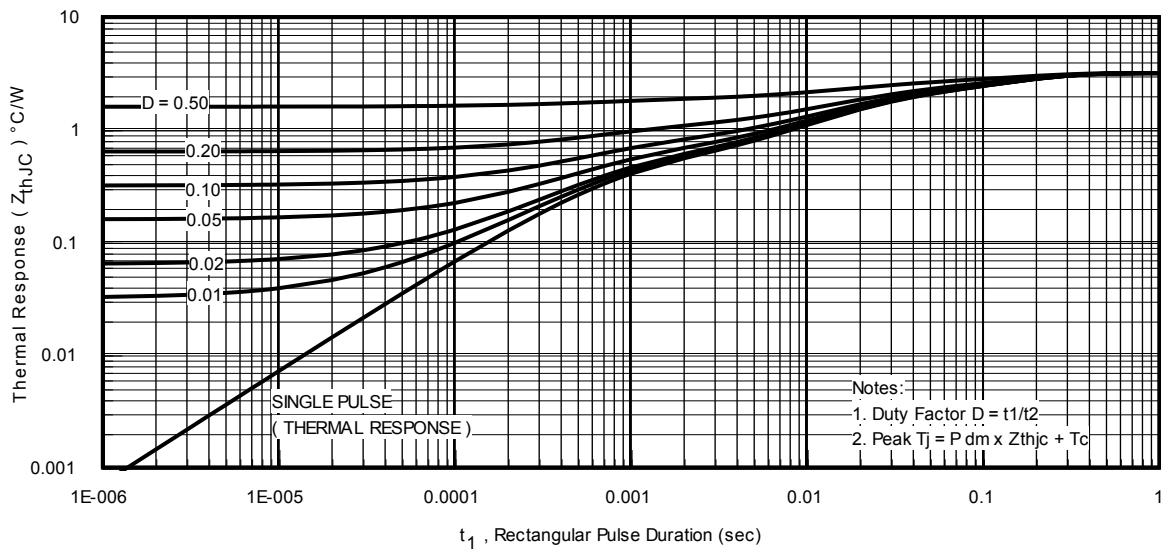
**Fig 7.** Typical Source-Drain Diode Forward Voltage

**Fig 8.** Maximum Safe Operating Area

**Fig 9.** Maximum Drain Current vs. Case Temperature

**Fig 10.** Threshold Voltage vs. Temperature

**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case

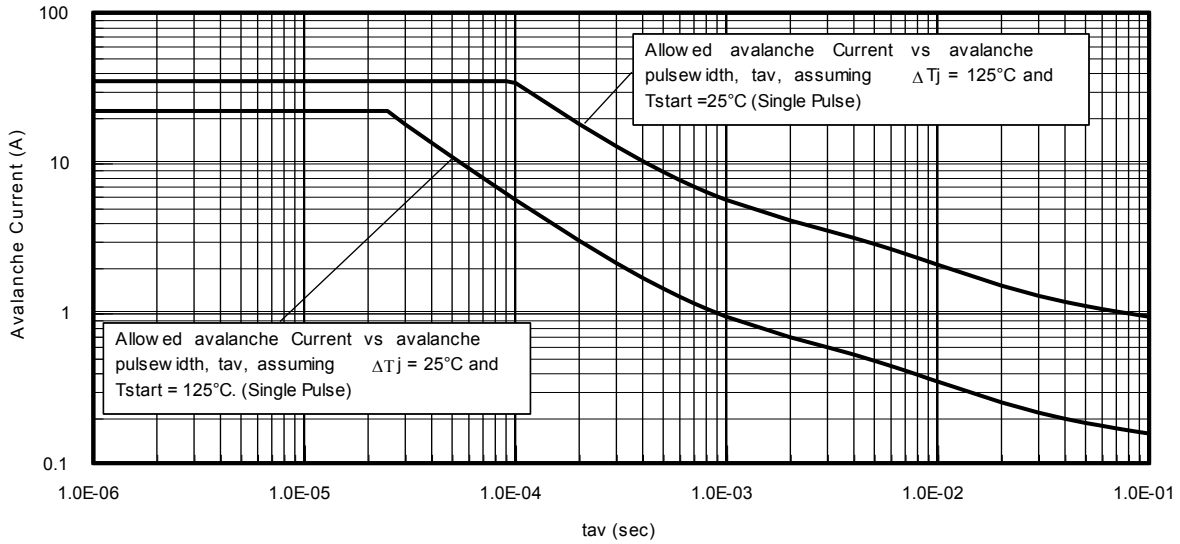


Fig 12. Typical Avalanche Current vs. Pulse Width

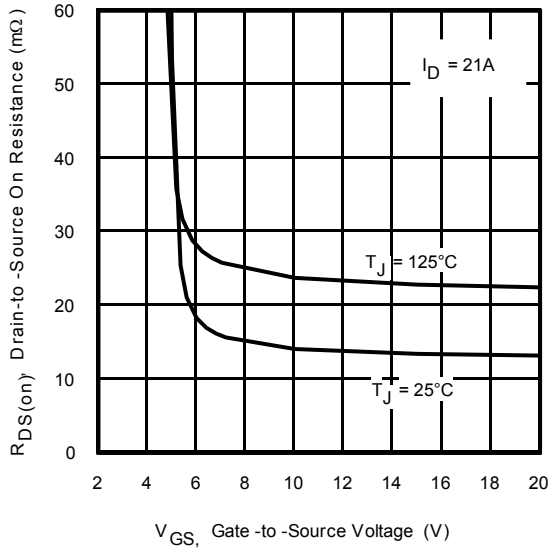


Fig 13. On-Resistance vs. Gate Voltage



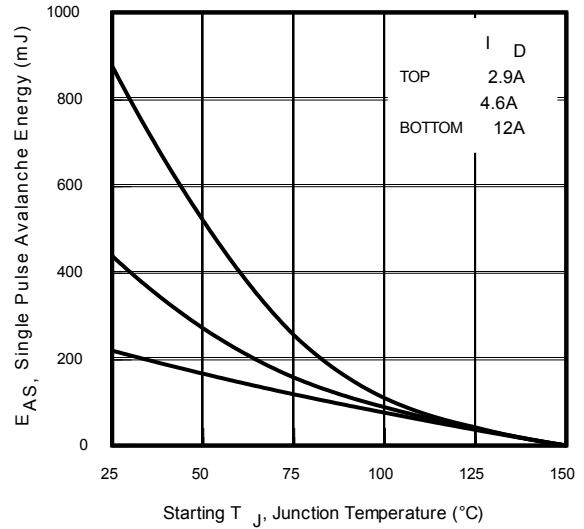


Fig 14. Maximum Avalanche Energy vs. Drain Current

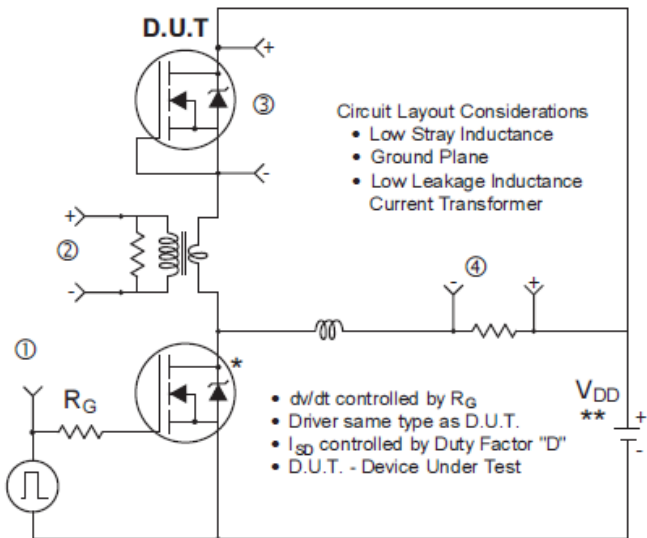


\* Use P-Channel Driver for P-Channel Measurements

\*\* Reverse Polarity for P-Channel

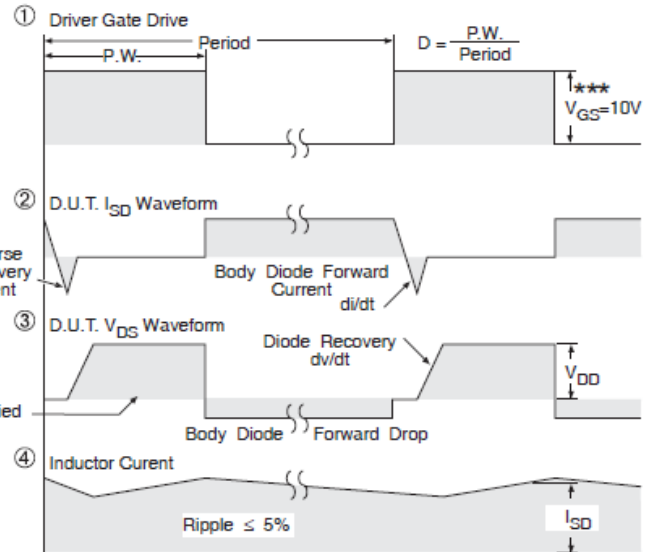


\*\*\*  $V_{GS} = 5V$  for Logic Level Devices


**Fig 15. Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET® Power MOSFETs**

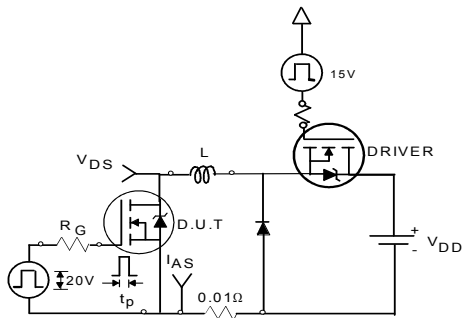


**Fig 16a. Unclamped Inductive Test Circuit**

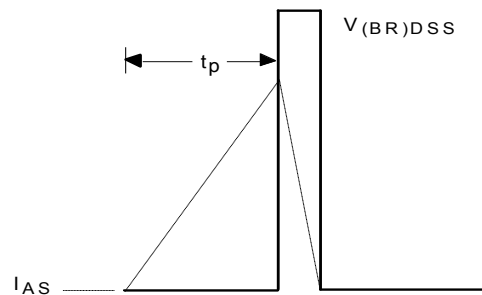


**Fig 16b. Unclamped Inductive Waveforms**

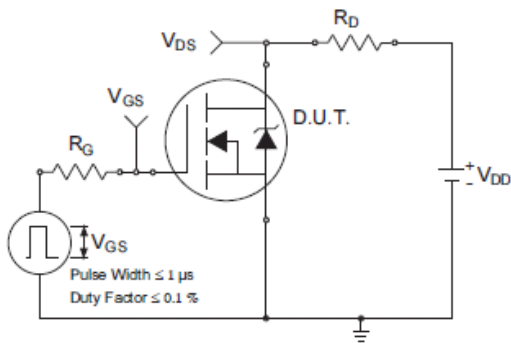


**Fig 17a. Switching Time Test Circuit**

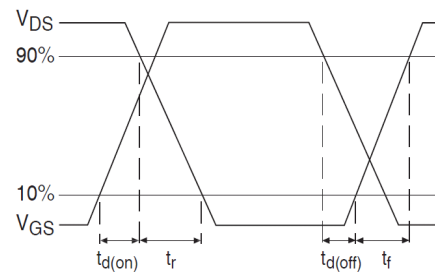

**Fig 17b. Switching Time Waveforms**

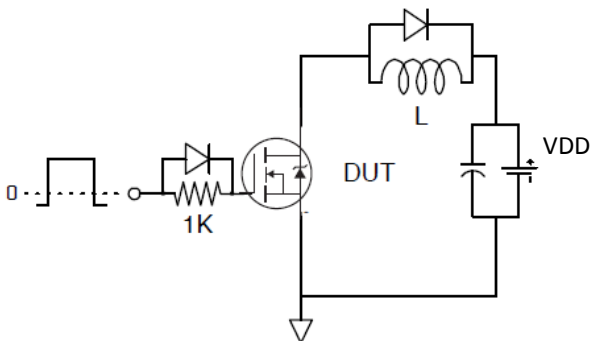


**Fig 18. Gate Charge Test Circuit**

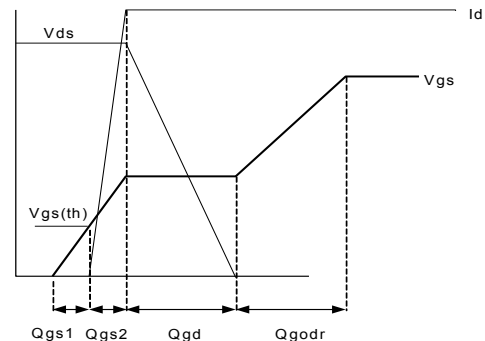


**Fig 19. Gate Charge Waveform**

**PQFN 5x6 Outline "B" Package Details**




SIDE VIEW

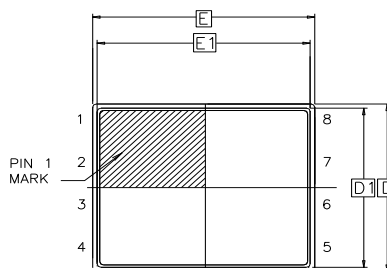

TOP VIEW

| SYMBOL | DIM | MIN   | NOM       | MAX   |
|--------|-----|-------|-----------|-------|
| A      |     | 0.800 | 0.830     | 1.05  |
| A1     |     | 0.000 | 0.020     | 0.050 |
| A2     |     | 0.580 | 0.630     | 0.680 |
| A3     |     |       | 0.254 REF |       |
| Ø      |     | 0*    | 10*       | 12*   |
| b      |     | 0.350 | 0.400     | 0.470 |
| D      |     | 4.875 | 5.000     | 5.150 |
| D1     |     | 4.675 | 4.750     | 5.000 |
| D2     |     | 3.700 | 4.210     | 4.300 |
| e      |     |       | 1.270 BSC |       |
| E      |     | 5.850 | 6.000     | 6.150 |
| E1     |     | 5.675 | 5.750     | 6.000 |
| E2     |     | 3.380 | 3.480     | 3.760 |
| E4     |     | 2.480 | 2.580     | 2.680 |
| L      |     | 0.550 | 0.800     | 0.900 |
| R      |     |       | 0.200 REF |       |
| R1     |     |       | 0.100 REF |       |
| R2     |     | 0.150 | 0.200     | 0.250 |

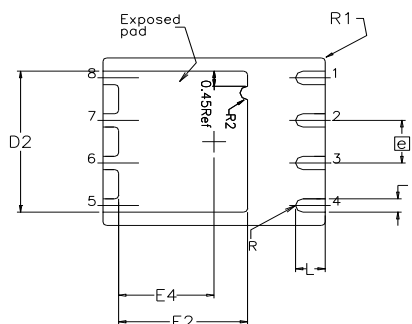


BOTTOM VIEW

For more information on board mounting, including footprint and stencil recommendation, please refer to application note AN-1136: <http://www.irf.com/technical-info/appnotes/an-1136.pdf>


For more information on package inspection techniques, please refer to application note AN-1154: <http://www.irf.com/technical-info/appnotes/an-1154.pdf>

**PQFN 5x6 Outline "B" Part Marking**

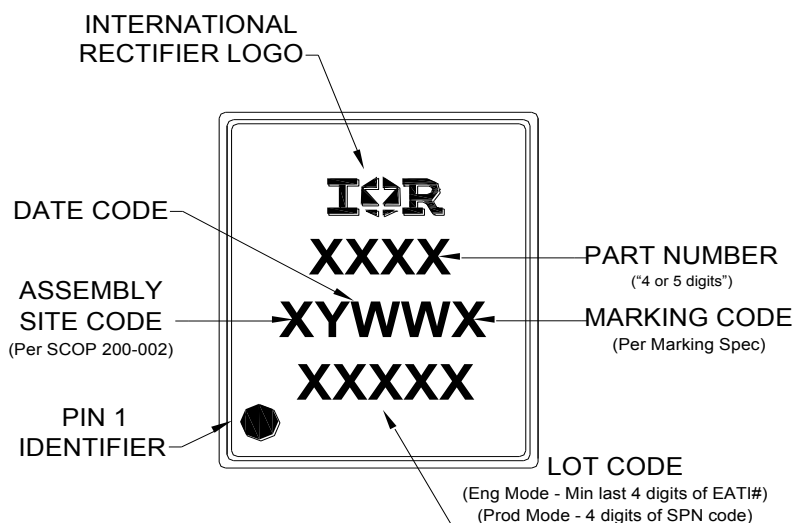

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**PQFN 5x6 Outline "B" Tape and Reel**

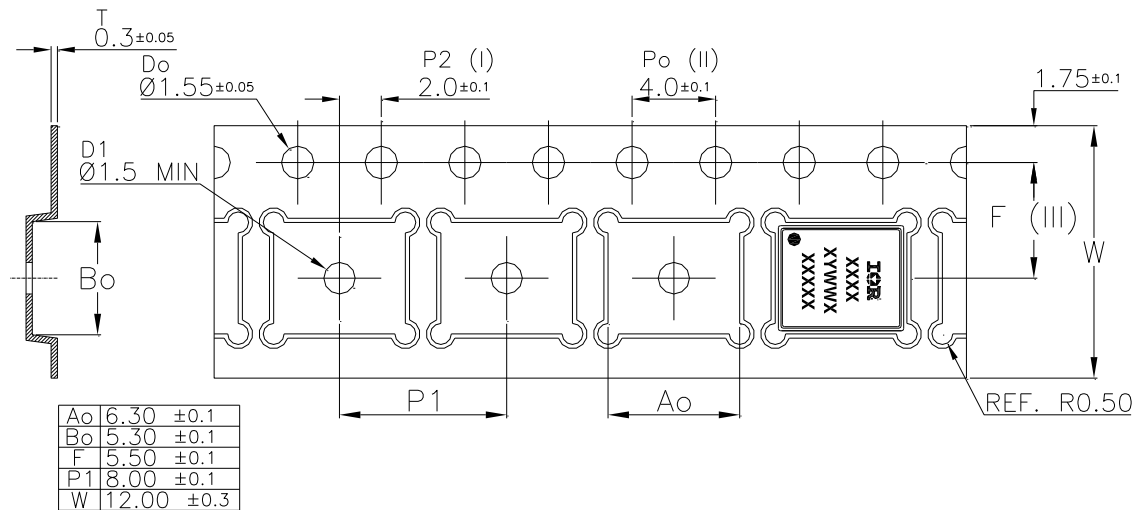

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**Qualification Information†**

|                                   |  |   |
|-----------------------------------|--|---|
| <b>Qualification Level</b>        | Industrial<br>(per JEDEC JESD47F <sup>††</sup> guidelines) |   |
| <b>Moisture Sensitivity Level</b> | PQFN 5mm x 6mm   | MSL1<br>(per JEDEC J-STD-020D <sup>††</sup> ) |
| <b>RoHS Compliant</b>             | Yes  |   |

† Qualification standards can be found at International Rectifier's web site: <http://www.irf.com/product-info/reliability/>

†† Applicable version of JEDEC standard at the time of product release.

**Notes:**

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 3.0\text{mH}$ ,  $R_G = 50\Omega$ ,  $I_{AS} = 12\text{A}$ .
- ③ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ④  $R_\theta$  is measured at  $T_J$  of approximately  $90^\circ\text{C}$ .
- ⑤ When mounted on 1 inch square PCB (FR-4). Please refer to AN-994 for more details:  
<http://www.irf.com/technical-info/appnotes/an-994.pdf>



## **IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## **WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Infineon](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [JANTX2N5237](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [TPCC8103,L1Q\(CM](#)  
[MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [SSM6J414TU,LF\(T](#) [751625C](#) [BUK954R8-60E](#) [GROUP A 5962-](#)  
[8877003PA](#) [NTE6400](#) [SQJ402EP-T1-GE3](#) [2SK2614\(TE16L1,Q\)](#) [2N7002KW-FAI](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [ECH8691-TL-W](#)  
[FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE221](#) [NTE222](#) [NTE2384](#) [NTE2903](#) [NTE2941](#) [NTE2945](#) [NTE2946](#) [NTE2960](#)  
[NTE2967](#) [NTE2969](#) [NTE2976](#) [NTE6400A](#) [NTE2910](#) [NTE2916](#) [NTE2956](#) [NTE2911](#) [DMN2080UCB4-7](#) [TK10A80W,S4X\(S](#)  
[SSM6P69NU,LF](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#)