




Platinum temperature sensor with long PTFE-insulated 4-wire extensions For ultra-high precision

Benefits & Characteristics

- Excellent long-term stability
- 4-wire configuration
- Fast delivery times
- High-quality extensions
- Connection points insulated with PTFE shrinking tube
- Color coding acc. to IEC60751 standard



Illustration¹⁾

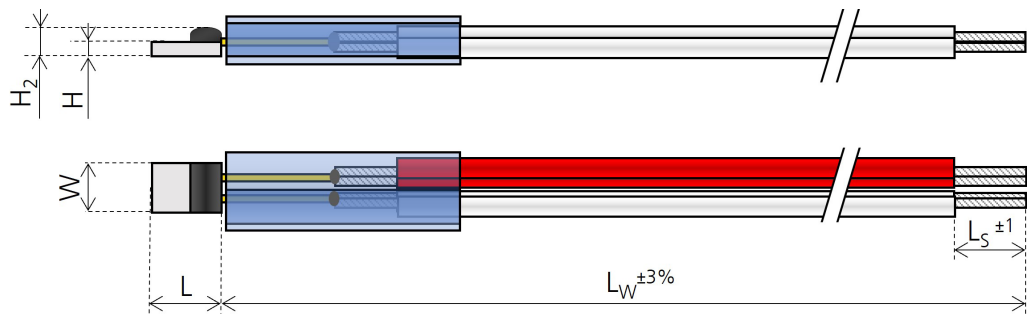

1) For actual size, see dimensions

Technical Data

Operating temperature range:	-50 °C to +200 °C	
Nominal resistance:*	100 Ω at 0 °C	
Characteristics curve:*	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class (dependent on temperature range):*	IST AG reference	
	IEC 60751 F0.15	A
	IEC 60751 F0.1	Y
Connection:*	10 mm Ni/Au wire Ø 0.2 mm laser-extended with Cu/Ag-stranded PTFE-insulated wire (2x white, 2x red), AWG30/19	
Wire length (L _W):*	see order information	
Stripping length (L _S):*	5 mm	
Recommended applied current: ¹⁾	1 mA at 100 Ω	

¹⁾ Self-heating must be considered



* Customer-specific alternatives available



Order Information



Size	Dimensions (L x W x H / H2 in mm) L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
------	--	----------------	-----------------	----------------



Nominal resistance: 100 Ω at 0 °C



2K (Ni/Au wire, 4 laser-extended Cu/Ag-stranded wire, AWG30/19, PTFE-insulated),
300 mm

216	2.5 x 1.6 x 0.65 / 1.1	P0K1.216.2K.Y.300-4	P0K1.216.2K.A.300-4	P0K1.216.2K.B.300-4
Order code		154583	154584	154585

2K (Ni/Au wire, 4 laser-extended Cu/Ag-stranded wire, AWG30/19, PTFE-insulated),
500 mm

216	2.5 x 1.6 x 0.65 / 1.1	P0K1.216.2K.Y.500-4	P0K1.216.2K.A.500-4	P0K1.216.2K.B.500-4
Order code		upon request	upon request	upon request

2K (Ni/Au wire, 4 laser-extended Cu/Ag-stranded wire, AWG30/19, PTFE-insulated),
1000 mm

216	2.5 x 1.6 x 0.65 / 1.1	P0K1.216.2K.Y.1000-4	P0K1.216.2K.A.1000-4	P0K1.216.2K.B.1000-4
Order code		upon request	upon request	upon request

Additional Documents

Application Note:	Document name: ATP_E
-------------------	-------------------------



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Temperature Sensors](#) category:

Click to view products by [Innovative Sensor Technology](#) manufacturer:

Other Similar products are found below :

[590-59CN02-103](#) [HEL-705-U-0-12-C1](#) [HEL-736-U-2-36](#) [519-39AW09-245](#) [519-39CH01-295](#) [535-32AB36-202](#) [535-32AB37-202](#) [535-34AE08-303](#) [521-33AG04-303](#) [521-53BR01-503](#) [590-32AC34-103](#) [590-32AD05-103](#) [HEL-705-U-0-36-00](#) [HEL-705-U-1-12-C2](#) [LTPCTAA20MDSIEX01](#) [HEL-716-U-0-24-00](#) [R-10331-3F6](#) [89750186](#) [20006233-00](#) [64-28301001-0050.TM](#) [72-21304703-0150.0050.TM](#) [7J-36110002-0100.G005](#) [TEMPSENSORAC](#) [20-20100799-1000](#) [GE-2133D](#) [1000140](#) [B57045K0682K000](#) [TM1STPTTSN52015](#) [TM171DWAL2L](#) [R-1630](#) [R-8204](#) [R-8203](#) [B57500K103A1](#) [E52-CA1GTY 1M](#) [79696038](#) [79696039](#) [JS7352](#) [A-2102](#) [HRTS-5760-B-U-1-12](#) [89750190](#) [JI-F103WN-L301](#) [JI-F103WN-L252](#) [JI-103C1R2-L102](#) [JI-F103WN-L102](#) [JIC-F103WN-L301](#) [JIC-F103WN-L252](#) [JIC-F103WN-L102](#) [JIC-103C1R2-L301](#) [JIC-103C1R2-L252](#) [JIC-103C1R2-L102](#)