




P1K0.202.6W.A.007

Platinum sensor with wires, ESD-optimized For high temperatures

Benefits & Characteristics

- Excellent long-term stability
- Low self-heating
- Fast response time
- Vibration and temperature shock resistant
- ESD-optimized design

Illustration¹⁾

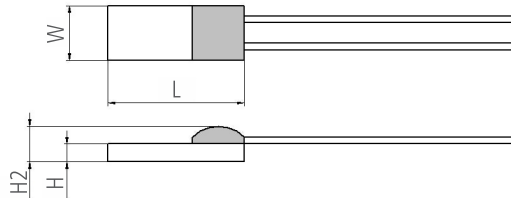

Technical Data

Operating temperature range:	-200 °C to +600 °C
Nominal resistance:	1000 Ω at 0 °C
Characteristics curve:	3850 ppm/K
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature
Tolerance class (dependent on temperature range):	IEC 60751 F0.15 A (IST AG reference)
Connection:	Pt-cladded Ni-wire, Ø 0.2 mm (solderable, weldable, crimpable, brazeable), 7 mm long
Dimensions L x W x H / H2:	1.8 x 2.0 x 0.65 / 1.1 mm
Tolerance (chip):	L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm
Special:	ESD-optimized design acc. IEC/EN 61000-4-2

Product Photo





Order Information

Description:	Order code:	Former main reference
P1K0.202.6W.A.007	155721	100963

Additional Documents

	Document name:
Application Note:	ATP_E



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Temperature Sensors](#) category:

Click to view products by [Innovative Sensor Technology](#) manufacturer:

Other Similar products are found below :

[590-59CN02-103](#) [HEL-705-U-0-12-C1](#) [HEL-736-U-2-36](#) [519-39AW09-245](#) [519-39CH01-295](#) [535-32AB36-202](#) [535-32AB37-202](#) [535-34AE08-303](#) [521-33AG04-303](#) [521-53BR01-503](#) [590-32AC34-103](#) [590-32AD05-103](#) [HEL-705-U-0-36-00](#) [HEL-705-U-1-12-C2](#) [LTPCTAA20MDSIEX01](#) [HEL-716-U-0-24-00](#) [R-10331-3F6](#) [89750186](#) [20006233-00](#) [64-28301001-0050.TM](#) [72-21304703-0150.0050.TM](#) [7J-36110002-0100.G005](#) [TEMPSENSORAC](#) [20-20100799-1000](#) [GE-2133D](#) [1000140](#) [B57045K0682K000](#) [TM1STPTTSN52015](#) [TM171DWAL2L](#) [R-1630](#) [R-8204](#) [R-8203](#) [B57500K103A1](#) [E52-CA1GTY 1M](#) [79696038](#) [79696039](#) [JS7352](#) [A-2102](#) [HRTS-5760-B-U-1-12](#) [89750190](#) [JI-F103WN-L301](#) [JI-F103WN-L252](#) [JI-103C1R2-L102](#) [JI-F103WN-L102](#) [JIC-F103WN-L301](#) [JIC-F103WN-L252](#) [JIC-F103WN-L102](#) [JIC-103C1R2-L301](#) [JIC-103C1R2-L252](#) [JIC-103C1R2-L102](#)