

**Description**

The XU devices are low phase noise quartz-based PLL oscillators supporting a large range of frequencies and output interface types. These devices are designed to operate at three different power supplies and are available in multiple package sizes as well as temperature grades.



With a patented one-time program (OTP) allowing for infinite memory shelf life, the XU devices can be programmed to generate an output frequency from 16kHz to 1500MHz with a resolution as low as 1Hz accuracy. The configuration capability of this family of devices allows for fast delivery times for both sample and large production orders.

**Features**

- Frequency range: 0.016MHz to 1500MHz<sup>[1]</sup>
- Output types: LVDS, LVPECL, HCSSL, LVCMOS
- Supply voltage options: 1.8V, 2.5V, or 3.3V
- Phase jitter (1.875MHz to 20MHz): 100fs typical
- Phase jitter (12kHz to 20MHz): 300fs typical
- Package options:
  - 5.0 × 3.2 × 1.2 mm
  - 7.0 × 5.0 × 1.3 mm
- Operating temperature: -20°C to +70°C
  - Frequency stability options: ±20, ±25, ±50, or ±100 ppm
- Operating temperature: -40°C to +85°C
  - Frequency stability options: ±25, ±50, or ±100 ppm
- Operating temperature: -40°C to +105°C
  - Frequency stability options: ±50 or ±100 ppm

[1] There is a dead zone between 1037.5MHz to 1300MHz. Contact [www.idt.com/support](http://www.idt.com/support) for frequencies above 1300MHz.

**Pin Assignments**

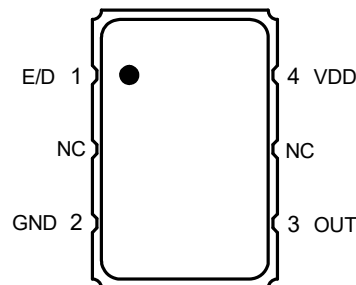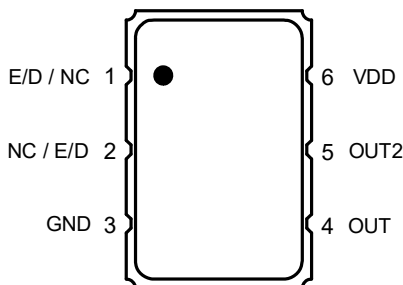

**Table 1. 6-pin Package**

Pin #	Pin Name	Description
1	E/D NC	Enable/Disable <sup>[a,b]</sup> No connect
2	NC E/D	No connect Enable/Disable <sup>[a,b]</sup>
3	GND	Connect to ground
4	OUT	Output
5	OUT2	Complementary output
6	V <sub>DD</sub>	Supply voltage

**Table 2. 4-pin Package**

Pin #	Pin Name	Description
1	E/D	Enable/Disable <sup>[a,b]</sup>
2	GND	Connect to ground
3	OUT	Output
4	V <sub>DD</sub>	Supply voltage

[a] Pulled high internally = output enabled.

[b] Low = output disabled.

See [Ordering Information](#) for more details.

## Absolute Maximum Ratings

Stresses above the ratings listed below can cause permanent damage to the device. These ratings, which are standard values for IDT commercially rated parts, are stress ratings only. Functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods can affect product reliability. Electrical parameters are guaranteed only over the recommended operating temperature range.

**Table 3. Absolute Maximum Ratings**

Item	Rating			
V <sub>DD</sub>	-0.5 to +5.0V			
E/D	-0.5V to V <sub>DD</sub> + 0.5V			
OUT	-0.5V to V <sub>DD</sub> + 0.5V			
Storage Temperature	-55°C to 125°C			
Maximum Junction Temperature	125°C			
Core Current	65mA maximum			
Theta J <sub>A</sub>	JU6	75.9 °C/W	JS6	89.6 °C/W
Theta J <sub>B</sub>		48.6°C/W		54.3 °C/W

## ESD Compliance

**Table 4. ESD Compliance**

Human Body Model (HBM)	1000V
------------------------	-------


## Mechanical Testing

**Table 5. Mechanical Testing \***

Parameter	Test Method
Mechanical Shock	Half-sine wave with 0.3ms 3000G. X, Y, Z each direction 1 time.
Mechanical Vibration	Frequency: 10 to 55MHz amplitude: 1.5mm. Frequency: 55–2000Hz peak value: 20G. Duration time: 4H for each X,Y,Z axis; total 12hours.
High Temp Operating Life (HTOL)	2000 hours at 125°C (under power).
Hermetic Seal	Gross leak (air leak test). Fine leak (Helium leak test) He-pressure: 6kgf/cm <sup>2</sup> 2 hours.

\* MSL level does not apply.

## Solder Reflow Profile

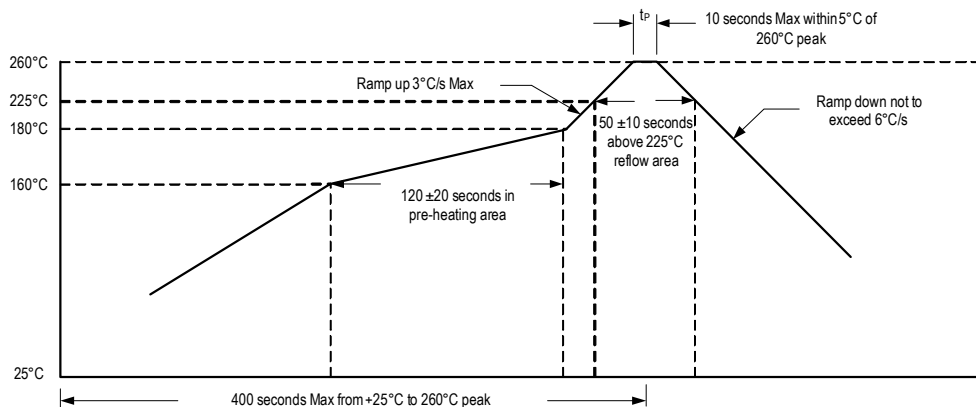

## DC Electrical Characteristics

Note for all DC Electrical Characteristics tables: A pull-up resistor from  $V_{DD}$  to E/D enables output when pin 1 is left open.

**Table 6. 3.3V IDD DC Electrical Characteristics**

$V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ .

Symbol	Parameter	Output Type	Conditions	Minimum	Typical	Maximum	Units
$I_{DD}$	Current Consumption	LVDS	0.016MHz to 400MHz.			97	mA
			400.000+MHz to 1.5GHz.			122	
		LVPECL	0.016MHz to 212.5MHz.			115	
			212.5+MHz to 400MHz.			128	
			400+MHz to 670MHz.			142	
		HCSL	0.016MHz to 670MHz.			145	
		LVCMOS	0.016MHz to 62.5MHz.			98	
			62.5+MHz to 167MHz.			108	

**Table 7. 2.5V IDD DC Electrical Characteristics**

$V_{DD} = 2.5V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ .

Symbol	Parameter	Output Type	Conditions	Minimum	Typical	Maximum	Units
$I_{DD}$	Current Consumption	LVDS	0.016MHz to 400MHz.			90	mA
			400.000+MHz to 1.35GHz.			103	
		LVPECL	0.016MHz to 156.25MHz.			102	
			156.25+MHz to 400MHz.			112	
			400+MHz to 670MHz.			118	
		HCSL	0.016MHz to 400MHz.			102	
			400.000+MHz to 670MHz.			112	
		LVCMOS	0.016MHz to 62.5MHz.			80	
			62.5+MHz to 125MHz.			85	
			125+MHz to 167MHz.			92	

**Table 8. 1.8V IDD DC Electrical Characteristics**

$V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ .

Symbol	Parameter	Output Type	Conditions	Minimum	Typical	Maximum	Units
$I_{DD}$	Current Consumption	LVDS	0.016MHz to 400MHz.			65	mA
			400.000+MHz to 1.0GHz.			72	
		LVPECL	0.016MHz to 250MHz.			75	
			250.000+MHz to 670MHz.			97	
		HCSL	0.016MHz to 400MHz.			68	
			400.000+MHz to 670MHz.			77	
LVC MOS	0.016MHz to 125MHz.			58			

**Table 9. LVDS DC Electrical Characteristics**

$V_{DD} = 3.3V, 2.5V, 1.8V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ . Below are guaranteed for listed standard frequencies.

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Units
$V_{OD}$	Differential Output Voltage		0.25	0.4	0.5	V
$V_{OS}$	Output Offset Voltage		1	1.17	1.375	
$V_{IH}$	Enable/Disable Input High Voltage		$70\%V_{DD}$			
$V_{IL}$	Enable/Disable Input Low Voltage				$30\%V_{DD}$	

**Table 10. LVPECL DC Electrical Characteristics**

$V_{DD} = 3.3V, 2.5V, 1.8V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ . Below are guaranteed for listed standard frequencies.

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Units
$V_{OH}$	Output High Voltage	$V_{DD} = 3.3V \pm 5\%$ .	1.85		2.3	V
		$V_{DD} = 2.5V \pm 5\%$ .	1.1		1.45	
		$V_{DD} = 1.8V \pm 5\%$ .	0.5		0.8	
$V_{OL}$	Output Low Voltage	$V_{DD} = 3.3V \pm 5\%$ .	1.1		1.65	
		$V_{DD} = 2.5V \pm 5\%$ .	0.35		0.85	
		$V_{DD} = 1.8V \pm 5\%$ .	0		0.25	
$V_{IH}$	Enable/Disable Input High Voltage		$70\%V_{DD}$			
$V_{IL}$	Enable/Disable Input Low Voltage				$30\%V_{DD}$	

**Table 11. HCSL DC Electrical Characteristics**

$V_{DD} = 3.3V, 2.5V, 1.8V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ . Below are guaranteed for listed standard frequencies.

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Units
$V_{OH}$	Output High Voltage	$V_{DD} = 3.3V \pm 5\%$ .	0.6		1.1	V
		$V_{DD} = 2.5V \pm 5\%$ .	0.55		0.95	
		$V_{DD} = 1.8V \pm 5\%$ .	0.45		0.7	
$V_{OL}$	Output Low Voltage		0		0.2	
$V_{IH}$	Enable/Disable Input High Voltage		$70\%V_{DD}$			
$V_{IL}$	Enable/Disable Input Low Voltage				$30\%V_{DD}$	

**Table 12. LVCMOS DC Electrical Characteristics**

$V_{DD} = 3.3V, 2.5V, 1.8V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ . Below are guaranteed for listed standard frequencies.

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Units
$V_{OH}$	Differential Output Voltage		$90\%V_{DD}$			V
$V_{OL}$	Output Offset Voltage				$10\%V_{DD}$	
$V_{IH}$	Enable/Disable Input High Voltage		$70\%V_{DD}$			
$V_{IL}$	Enable/Disable Input Low Voltage				$30\%V_{DD}$	

## AC Electrical Characteristics

**Table 13. 3.3V AC Electrical Characteristics**

$V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ .

Symbol	Parameter	Test Condition		Minimum	Typical	Maximum	Units
F	Output Frequency Range	LVDS.		0.016		1500	MHz
		LVPECL, HCSL.		0.016		670	
		LVCMOS.		0.016		167	
	Frequency Stability	Temperature = $-20^\circ C$ to $+70^\circ C$ .		$\pm 20$		$\pm 100$	ppm
		Temperature = $-40^\circ C$ to $+85^\circ C$ .		$\pm 25$		$\pm 100$	ppm
		Temperature = $-40^\circ C$ to $+105^\circ C$ .		$\pm 50$		$\pm 100$	ppm
	Aging (1st year)	$T_A = 25^\circ C$ .				$\pm 3$	
	Aging (10 years)	$T_A = 25^\circ C$ .				$\pm 10$	
	Output Load	LVDS.	Differential.		100		$\Omega$
		LVPECL.	$V_{DD} - 2.0V$ .		50		
		HCSL.	To GND.		50		
		LVCMOS.	To GND.		15		pF
$T_{ST}$	Start-up Time	Output valid time after $V_{DD}$ meets minimum specified level.				10	ms
$t_R$	Output Rise Time	LVDS.	20% to 80% Vpk-pk.		275	380	ps
		LVPECL.				400	
		HCSL.				330	
		LVCMOS.	10% to 90% $V_{DD}$ .			3	ns
$t_F$	Output Fall Time	LVDS.	80% to 20% Vpk-pk.		275	380	ps
		LVPECL.				400	
		HCSL.				330	
		LVCMOS.	90% to 10% $V_{DD}$ .			3	ns
$O_{DC}$	Output Clock Duty Cycle	LVDS.		45		55	%
		LVPECL.	$F_{OUT} \leq 312.5MHz$ .	45		55	
			$F_{OUT} > 312.5MHz$ .	40		60	
		HCSL.		45		55	
		LVCMOS.	$F_{OUT} \leq 62.5MHz$ .	45		55	
			$F_{OUT} > 62.5MHz$ .	40		60	
$T_{OE}$	Output Enable/ Disable Time					100	ns
$f_{JITTER}$	Phase Jitter (12kHz–20MHz)	LVDS.			300	400	fsec
		LVPECL.			300	400	
		HCSL.			300	400	
		LVCMOS.	$F_{OUT} = 100MHz$ .		300	400	

**Table 14. 2.5V AC Electrical Characteristics**
 $V_{DD} = 2.5V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ .

Symbol	Parameter	Test Condition		Minimum	Typical	Maximum	Units
F	Output Frequency Range	LVDS.		0.016		1350	MHz
		LVPECL.		0.75		670	
		HCSL.		0.016		670	
		LVCMOS.		0.016		167	
Frequency Stability	Temperature = $-20^\circ C$ to $+70^\circ C$ .		$\pm 20$		$\pm 100$	ppm	
	Temperature = $-40^\circ C$ to $+85^\circ C$ .		$\pm 25$		$\pm 100$	ppm	
	Temperature = $-40^\circ C$ to $+105^\circ C$ .		$\pm 50$		$\pm 100$	ppm	
Aging (1st year)	$T_A = 25^\circ C$ .				$\pm 3$		
Aging (10 years)	$T_A = 25^\circ C$ .				$\pm 10$		
Output Load	LVDS.		Differential.		100		$\Omega$
	LVPECL.		$V_{DD} - 2.0V$ .		50		
	HCSL.		To GND.		50		
	LVCMOS.		To GND.		15		pF
$T_{ST}$	Start-up Time	Output valid time after $V_{DD}$ meets minimum specified level.				10	ms
$t_R$	Output Rise Time	LVDS.		20% to 80% Vpk-pk.	300	400	ps
		LVPECL.			250	630	
		HCSL.				315	
		LVCMOS.		10% to 90% $V_{DD}$ .		3	ns
$t_F$	Output Fall Time	LVDS.		80% to 20% Vpk-pk.	300	400	ps
		LVPECL.			360	630	
		HCSL.				315	
		LVCMOS.		90% to 10% $V_{DD}$ .		3	ns
$O_{DC}$	Output Clock Duty Cycle	LVDS.		45		55	%
		LVPECL.		$F_{OUT} \leq 156.25MHz$ .	45	55	
				$F_{OUT} \leq 156.25MHz$ .	40	60	
		HCSL.		45		55	
		LVCMOS.		$F_{OUT} \leq 62.5MHz$ .	45	55	
				$F_{OUT} > 62.5MHz$ .	40	60	
$T_{OE}$	Output Enable/ Disable Time					100	ns
$f_{JITTER}$	Phase Jitter (12kHz–20MHz)	LVDS.			400	500	fsec
		LVPECL.			350	500	
		HCSL.			350	500	
		LVCMOS.		$F_{OUT} = 100MHz$ .		350	

**Table 15. 1.8V AC Electrical Characteristics**
 $V_{DD} = 1.8V \pm 5\%$ ,  $T_A = -20^\circ C$  to  $+70^\circ C$ ;  $-40^\circ C$  to  $+85^\circ C$ ,  $-40^\circ C$  to  $+105^\circ C$ .

Symbol	Parameter	Test Condition		Minimum	Typical	Maximum	Units	
F	Output Frequency Range	LVDS.		0.016		1000	MHz	
		LVPECL, HCSL.		0.016		670		
		LVCMOS.		0.016		125		
	Frequency Stability	Temperature = $-20^\circ C$ to $+70^\circ C$ .		$\pm 20$		$\pm 100$	ppm	
		Temperature = $-40^\circ C$ to $+85^\circ C$ .		$\pm 25$		$\pm 100$	ppm	
		Temperature = $-40^\circ C$ to $+105^\circ C$ .		$\pm 50$		$\pm 100$	ppm	
	Aging (1st year)	$T_A = 25^\circ C$ .				$\pm 3$		
	Aging (10 years)	$T_A = 25^\circ C$ .				$\pm 10$		
	Output Load	LVDS.	Differential.		100		$\Omega$	
		LVPECL, HCSL.	To GND.		50			
		LVCMOS.	To GND.		10		pF	
$T_{ST}$	Start-up Time	Output valid time after $V_{DD}$ meets minimum specified level.				10	ms	
$t_R$	Output Rise Time	LVDS.	20% to 80% Vpk-pk.		250	315	ps	
		LVPECL.			250	350		
		HCSL.				320		
		LVCMOS.	10% to 90% $V_{DD}$ .		5		ns	
$t_F$	Output Fall Time	LVDS.	80% to 20% Vpk-pk.		250	315	ps	
		LVPECL.			250	350		
		HCSL.				320		
		LVCMOS.	90% to 10% $V_{DD}$ .		5		ns	
$O_{DC}$	Output Clock Duty Cycle	LVDS.	$F_{OUT} \leq 156.25MHz$ .	45		55	%	
			$F_{OUT} \leq 156.25MHz$ .	40		60		
		LVPECL.	$F_{OUT} \leq 312.5MHz$ .	45		55		
			$F_{OUT} > 312.5MHz$ .	40		60		
		HCSL.			40			60
		LVCMOS.	$F_{OUT} \leq 62.5MHz$ .	45		55		
$F_{OUT} > 62.5MHz$ .	40			60				
$T_{OE}$	Output Enable/ Disable Time					100	ns	
$f_{JITTER}$	Phase Jitter (12kHz–20MHz)	LVDS.			800	1200	fsec	
		LVPECL.			750	1200		
		HCSL.			100	1200		
		LVCMOS.	$F_{OUT} = 100MHz$ .		800	1200		




**Notes for all AC Electrical Characteristics tables:**


- <sup>1</sup> A pull-up resistor from  $V_{DD}$  to E/D enables output when pin 1 is left open.
- <sup>2</sup> Installation should include a  $0.01\mu\text{F}$  bypass capacitor placed between  $V_{DD}$  and GND to minimize power supply line noise.
- <sup>3</sup> Stability is inclusive of  $25^\circ\text{C}$  tolerance, operating temperature range, input voltage change, load change, aging, shock and vibration.
- <sup>4</sup> Standard LVCMOS frequencies include 10MHz, 12MHz, 12.288MHz, 16MHz, 20MHz, 24MHz, 24.576MHz, 25MHz, 33.333MHz, 40MHz, 48MHz, 50MHz, 100MHz, 125MHz and 156.25MHz.
- <sup>5</sup> Standard differential frequencies include 100MHz, 106.25MHz, 125MHz, 150MHz, 155.52MHz, 156.25MHz, 200MHz, 212.5MHz, 250MHz, 300MHz, 312.5MHz and 400MHz.

## Output Waveforms


**Figure 1. LVDS Output Waveforms**

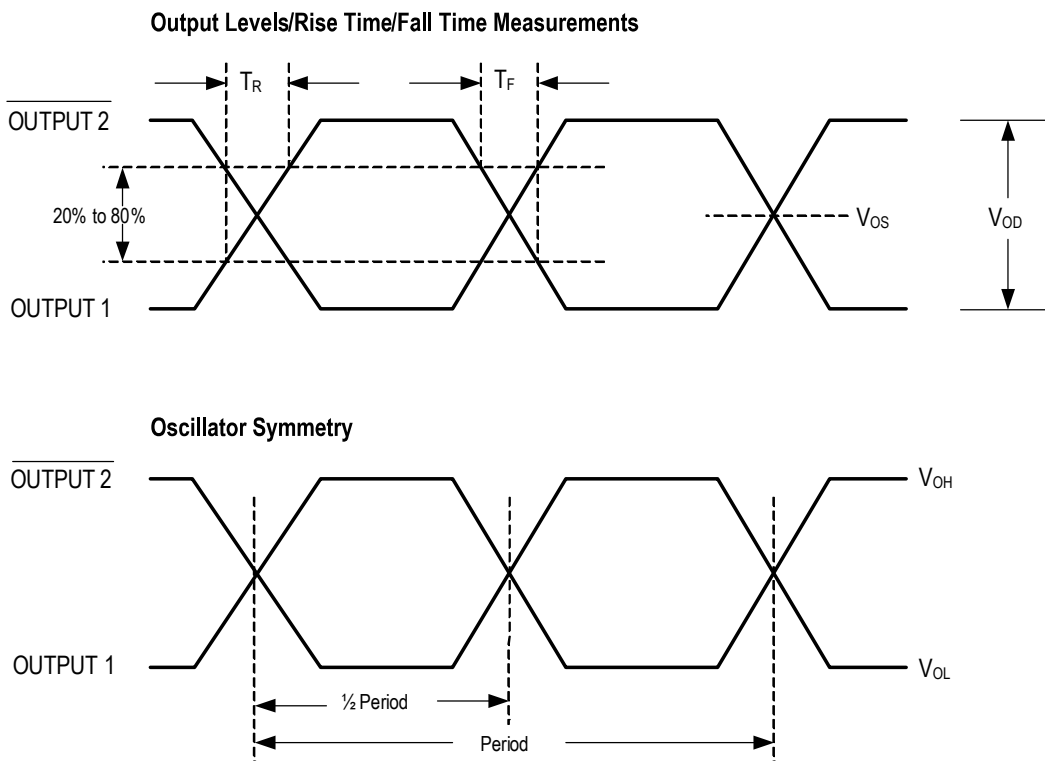


**Figure 2. LVPECL Output Waveforms**

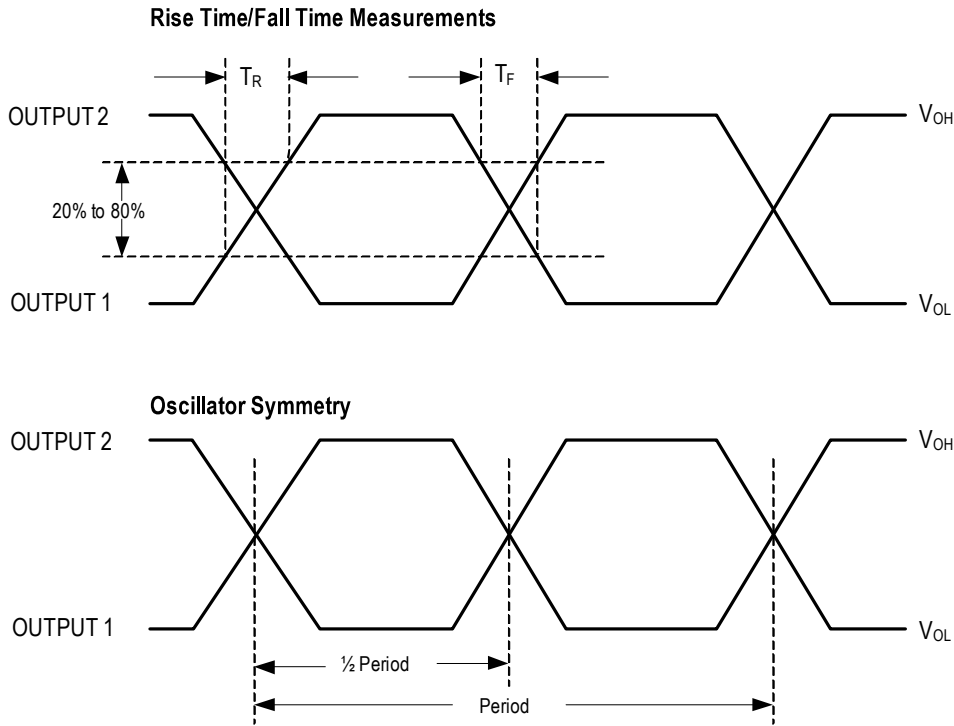

**Figure 3. HCSL Output Waveforms**

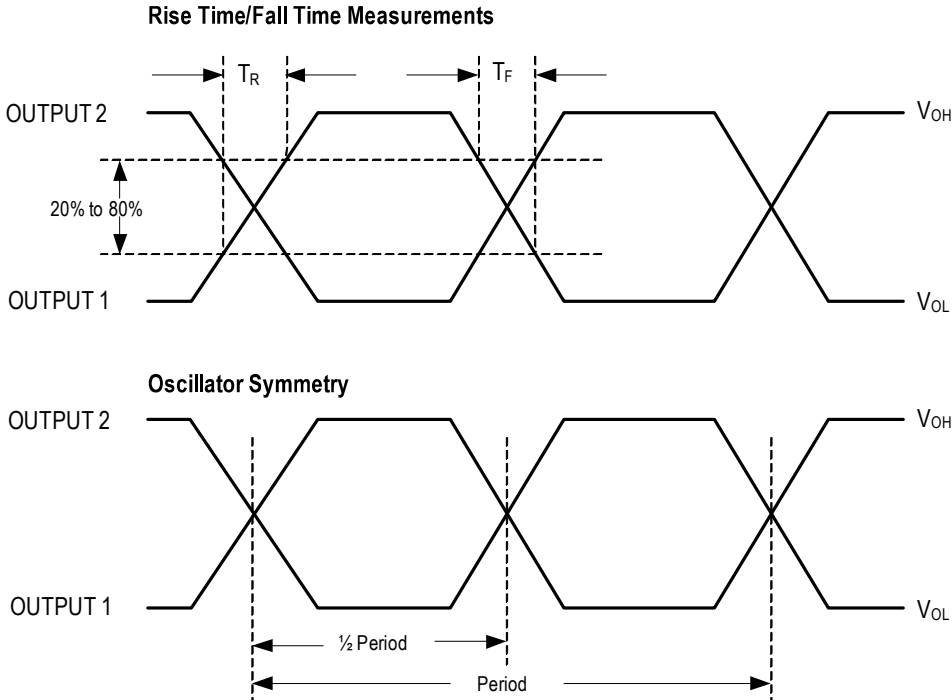

**Figure 4. LVCMOS Output Waveforms**

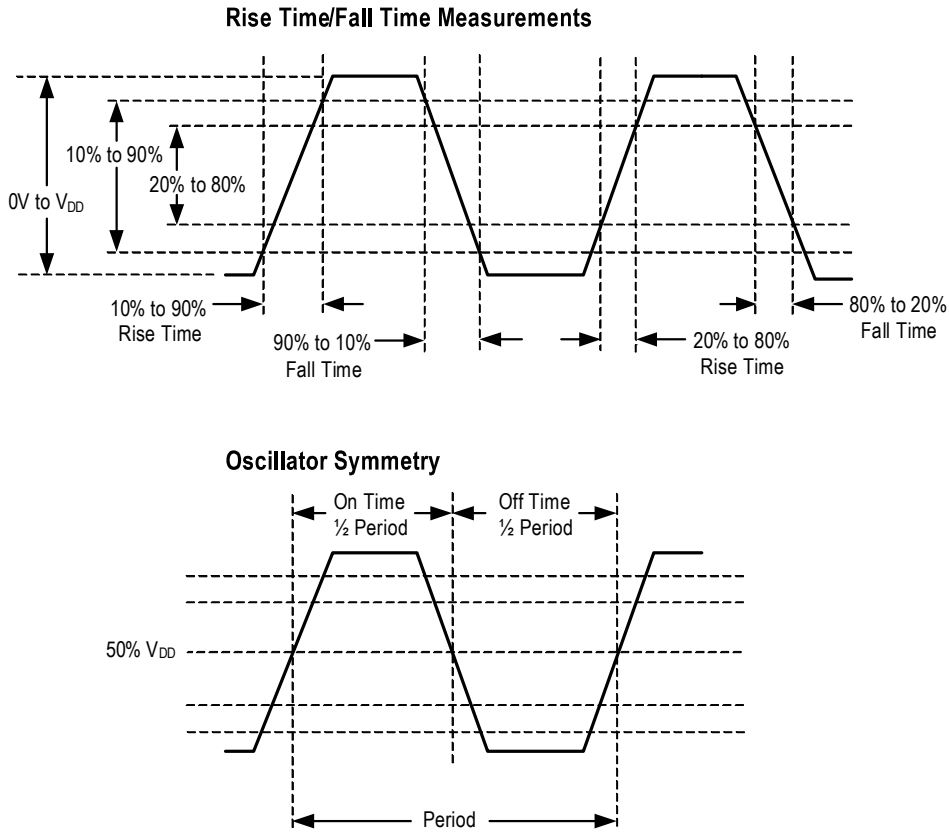

## Package Outline Drawings

The package outline drawings are appended at the end of this document and are accessible from the links below. The package information is the most current data available.


[www.idt.com/document/psc/js6-package-outline-50-x-32-mm-body-11-mm-thick](http://www.idt.com/document/psc/js6-package-outline-50-x-32-mm-body-11-mm-thick)

[www.idt.com/document/psc/ju6-package-outline-70-x-50-mm-body-13-mm-thick](http://www.idt.com/document/psc/ju6-package-outline-70-x-50-mm-body-13-mm-thick)

[www.idt.com/document/psc/js4-package-outline-50-x-32-mm-body-11-mm-thick](http://www.idt.com/document/psc/js4-package-outline-50-x-32-mm-body-11-mm-thick)

[www.idt.com/document/psc/ju4-package-outline-70-x-50-mm-body-13-mm-thick](http://www.idt.com/document/psc/ju4-package-outline-70-x-50-mm-body-13-mm-thick)




## Ordering Information

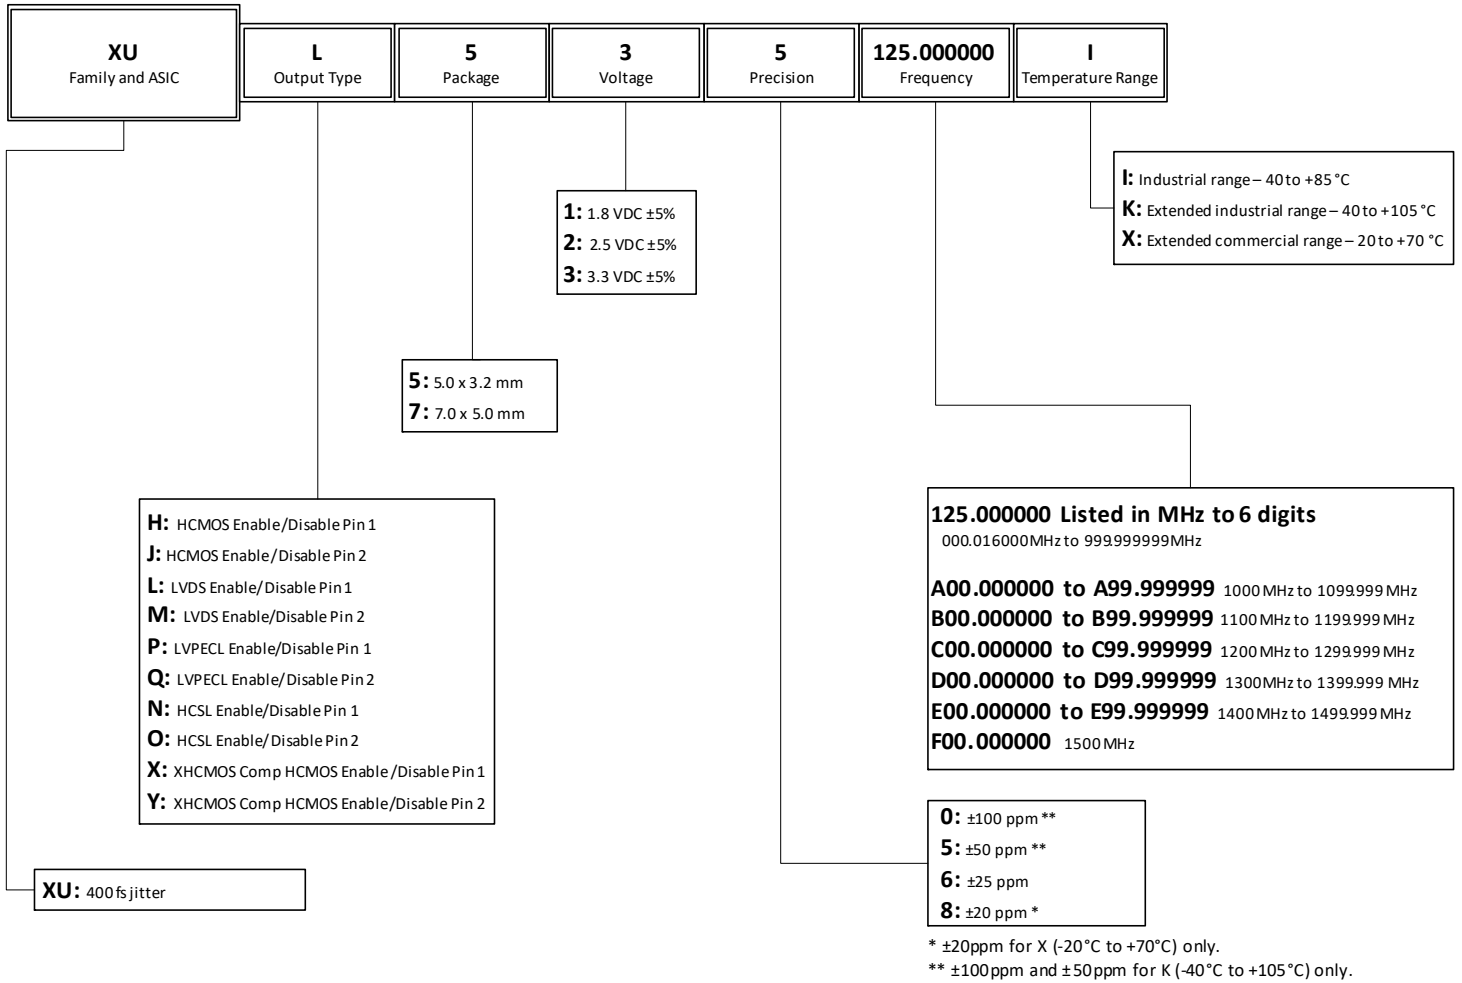

## Revision History

Revision Date	Description of Change
June 28, 2019	<ul style="list-style-type: none"> <li>▪ Added footnote to frequency range bullet under front page Features</li> </ul>
June 25, 2018	<ul style="list-style-type: none"> <li>▪ Updated Package Outline Drawings section.</li> </ul>
November 22, 2017	<ul style="list-style-type: none"> <li>▪ Updated Theta JA and JB in <i>Absolute Maximum Ratings</i> table.</li> <li>▪ Added MSL statement under <i>Mechanical Testing</i> table.</li> <li>▪ Updated ordering information.</li> </ul>
October 19, 2017	<ul style="list-style-type: none"> <li>▪ Updated document title.</li> <li>▪ Updated <i>Features</i> bullets.</li> <li>▪ Updated <i>Absolute Maximum Ratings</i> and <i>ESD Compliance</i> tables.</li> <li>▪ Added -40°C to +105°C rating to all electrical tables.</li> <li>▪ Removed phase noise charts.</li> <li>▪ Updated <i>Ordering Information</i> table.</li> </ul>
May 12, 2017	<ul style="list-style-type: none"> <li>▪ Reformatted embedded tables.</li> <li>▪ Removed “Jitter Performance” tables and moved the “Phase Jitter (12kHz–20MHz)” parameter to its respective AC Electrical Characteristics table.</li> <li>▪ Updated all Output Waveform drawings.</li> </ul>
December 1, 2016	Initial release

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	04/22/12	DP
01	ADDED LID IN TOP VIEW	07/12/12	KS
02	UPDATED LID TOLERANCES	12/03/12	KS
03	UPDATE PACKAGE DRAWING	8/8/14	JHUA

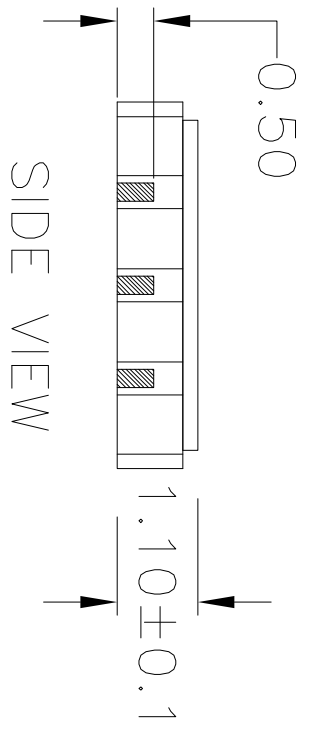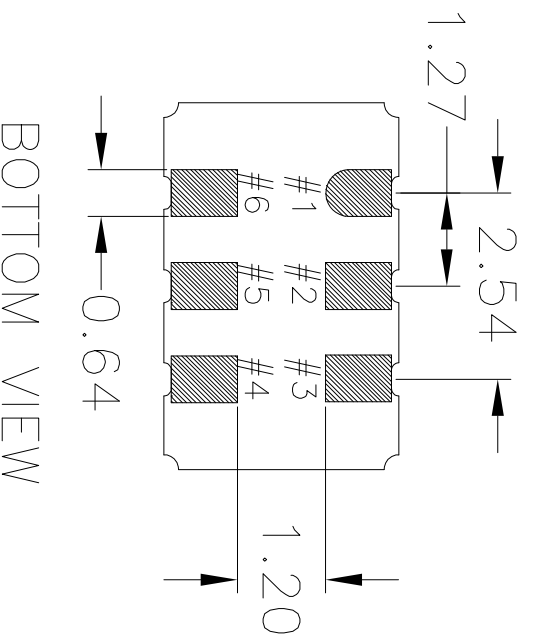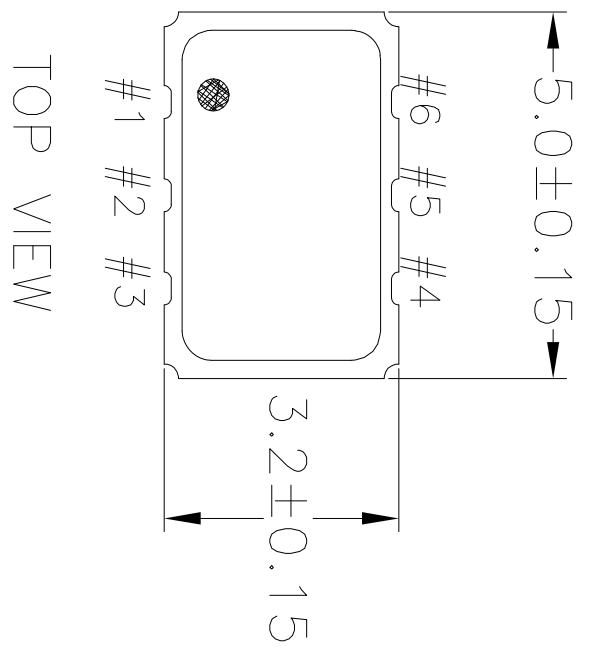


NOTES:  
1. ALL DIMENSIONS IN MM.

TOLERANCES UNLESS SPECIFIED		6024 Silver Creek Valley Rd	
DECIMAL	ANGULAR	San Jose, CA 95138	
XXX±	±	PHONE: (408) 727-6116	
XXXX±		FAX: (408) 492-8674	
XXXX±			
APPROVALS	DATE	TITLE JS6 PACKAGE OUTLINE	
DRAWN <i>QAC</i>	04/22/12	5.0 x 3.2 mm BODY	
CHECKED		1.1 mm Thick	
		SIZE	REV
		C	03
DRAWING No. PSC-4411		DO NOT SCALE DRAWING	
		SHEET 1 OF 2	



www.IDT.com

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	04/22/12	DP
01	ADDED LID IN TOP VIEW	07/12/12	KS
02	UPDATED LID TOLERANCES	12/03/12	KS
03	UPDATE PACKAGE DRAWING	8/8/14	JHUA

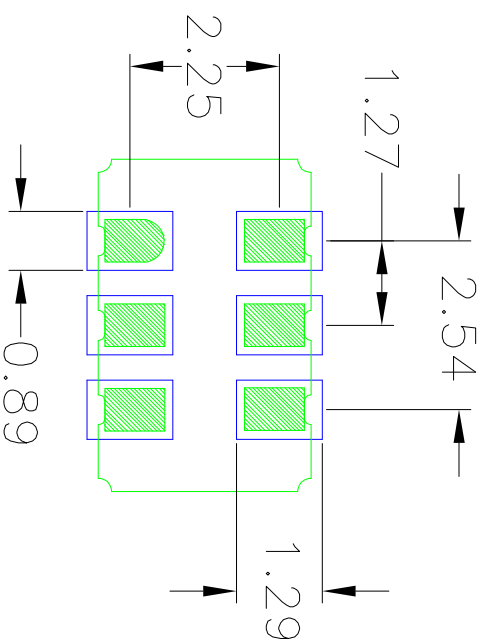


### RECOMMENDED LAND PATTERN




#### NOTES:

1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED ON PCB.
3. COMPONENT OUTLINE SHOW FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

TOLERANCES UNLESS SPECIFIED		DECIMAL ANGULAR	
XX.X	±		
XXXX.X			
APPROVALS		DATE	TITLE
DRAWN: <i>BA/C</i>		04/22/12	J56 PACKAGE OUTLINE
CHECKED:			5.0 x 3.2 mm BODY
			1.1 mm Thick
SIZE: C	DRAWING No:	PSC-4411	REV: 03
DO NOT SCALE DRAWING			SHEET 2 OF 2



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	10/5/12	KS
01	UPDATE PACKAGE DRWING	8/12/14	JHUA

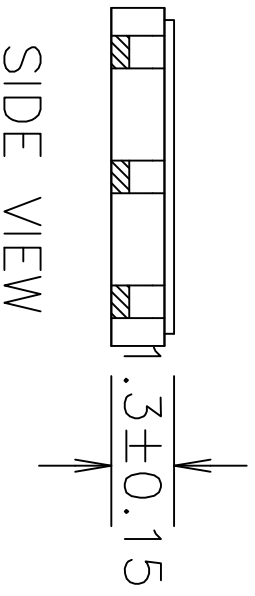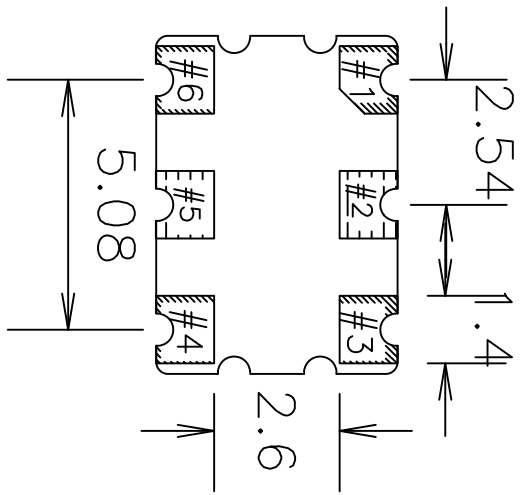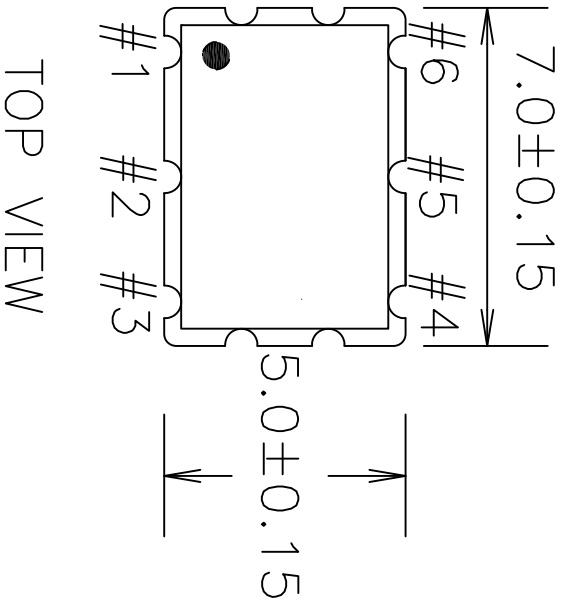


NOTES:  
1. ALL DIMENSIONS IN MM.

TOLERANCES UNLESS SPECIFIED		6024 Silver Creek Valley Rd	
DECIMAL	ANGULAR	San Jose, CA 95138	
XX.XX	±	PHONE: (408) 721-6116	
XXXX		FAX: (408) 492-8674	
XXXXX		www.IDT.com	
APPROVALS	DATE	TITLE	
DRAWN %AS	10/03/12	7.0 x 5.0 mm BODY	
CHECKED		1.3 mm Thick	
SIZE	DRAWING No.	REV	
C	PSC-4430	01	
DO NOT SCALE DRAWING		SHEET 1 OF 2	



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	10/5/12	KS
01	UPDATE PACKAGE DRAWING	8/12/14	JHU/A

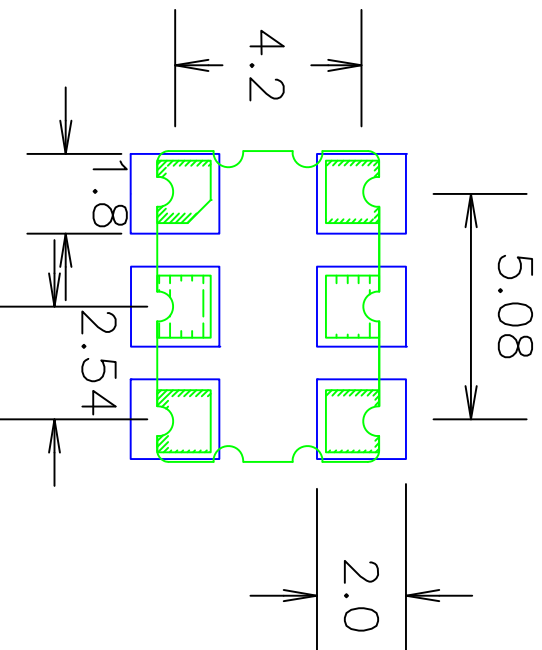




RECOMMENDED LAND PATTERN

NOTES:


1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED ON PCB.
3. COMPONENT OUTLINE SHOW FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

TOLERANCES UNLESS SPECIFIED		IDT™	
DECIMAL	ANGULAR	6024 Silver Creek Valley Rd San Jose, CA 95138 PHONE: (408) 727-6116 FAX: (408) 492-9874	
XX.X	F	www.IDT.com	
XX.XX		TITLE J06 PACKAGE OUTLINE	
XX.XXX		7.0 x 5.0 mm BODY	
APPROVALS	DATE	1.3 mm Thick	
DRAWN <i>MS</i>	10/03/12	SIZE	REV
CHECKED		C	01
		DRAWING No. PSC-4430	
		DO NOT SCALE DRAWING	
		SHEET 2 OF 2	


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	08/21/12	K. Stahn
01	UPDATED LID TOLERANCES	12/03/12	K. Stahn
02	UPDATE PACKAGE DRAWING	8/8/14	JHUA

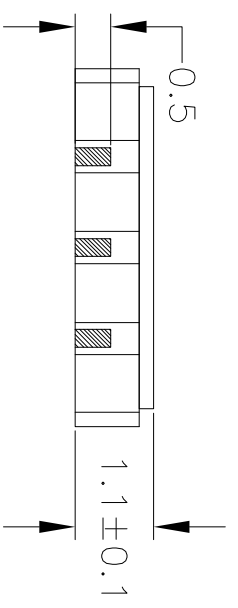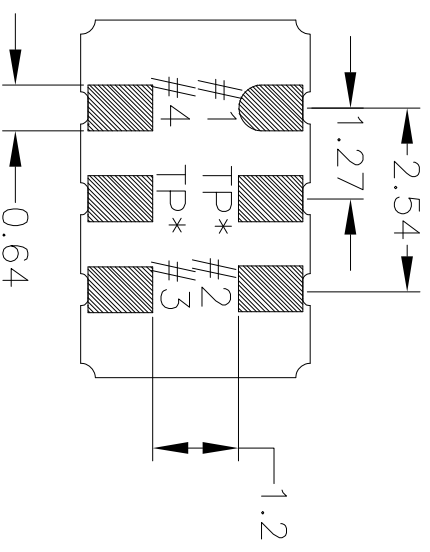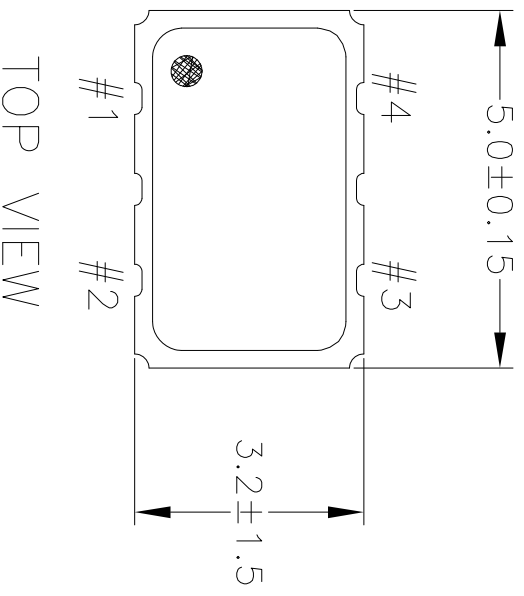

NOTES:  
1. ALL DIMENSIONS IN MM.

TOLERANCES UNLESS SPECIFIED		www.IDT.com	
DECIMAL	ANGULAR	 6024 Silver Creek Valley Rd San Jose, CA 95138 PHONE: (408) 727-6116 FAX: (408) 492-8674	
XXX±	±		
XXXX		TITLE JS4 PACKAGE OUTLINE	
XXXX		5.0 x 3.2 mm BODY	
APPROVALS	DATE	1.1 mm Thick	
DRAWN JCS	07/16/12	SIZE C	DRAWING No. PSC-4429
CHECKED		REV	02
DO NOT SCALE DRAWING		SHEET 1 OF 2	


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	08/21/12	K. Stahn
01	UPDATED LID TOLERANCES	12/03/12	K. Stahn
02	UPDATE PACKAGE DRAWING	8/8/14	JHUJA

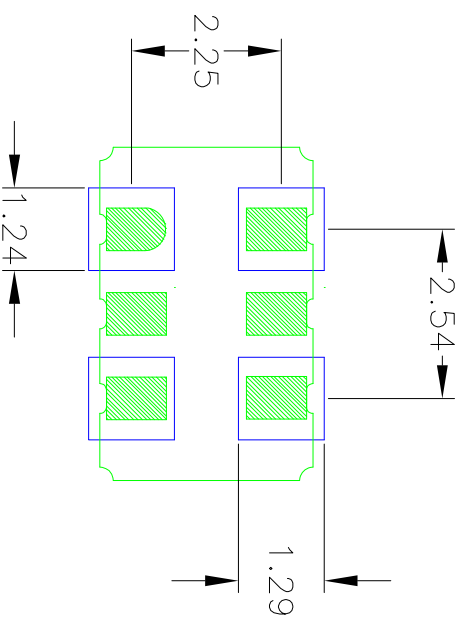


### RECOMMENDED LAND PATTERN

#### NOTES:


1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED ON PCB.
3. COMPONENT OUTLINE SHOW FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

TOLERANCES UNLESS SPECIFIED		www.IDT.com	
DECIMAL	ANGULAR	 <b>IDT</b> 8024 Silver Creek Valley Rd San Jose, CA 95138 Phone: (408) 727-6116 Fax: (408) 492-9874	
XX±	±		
XXX±			
XXXX±			
APPROVALS	DATE	TITLE	REV
DRAWN XLS	07/16/12	J54 PACKAGE OUTLINE	02
CHECKED		5.0 x 3.2 mm BODY	
		1.1 mm Thick	
SIZE	DRAWING No.		
C	FSC-4429		
DO NOT SCALE DRAWING			SHEET 2 OF 2


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	10/09/12	KS
01	UPDATE PACKAGE DRAWING	8/11/14	JHUA

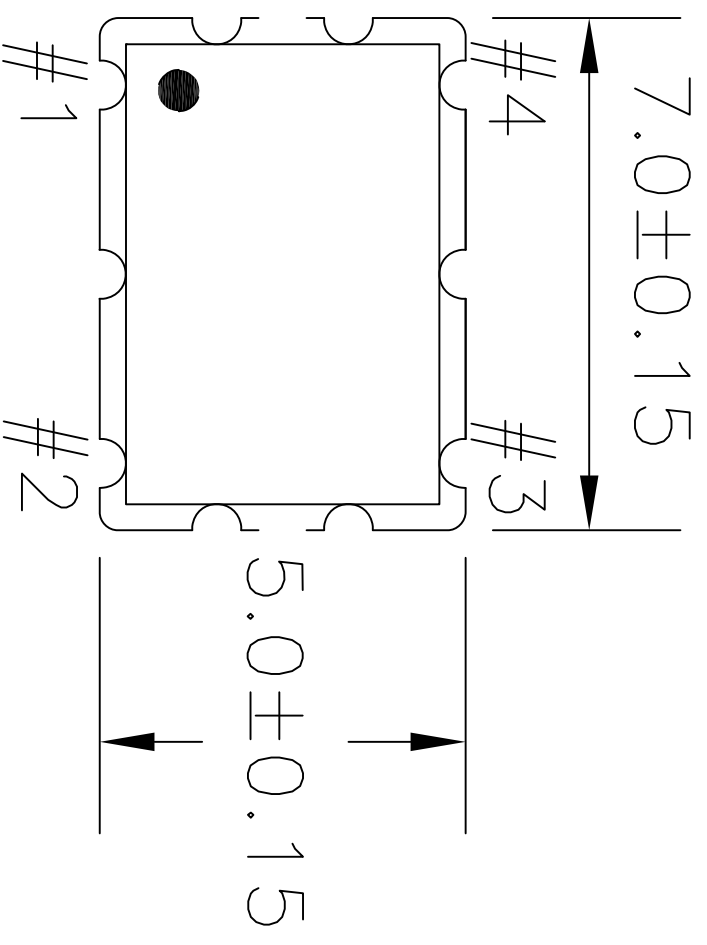

TOP VIEW

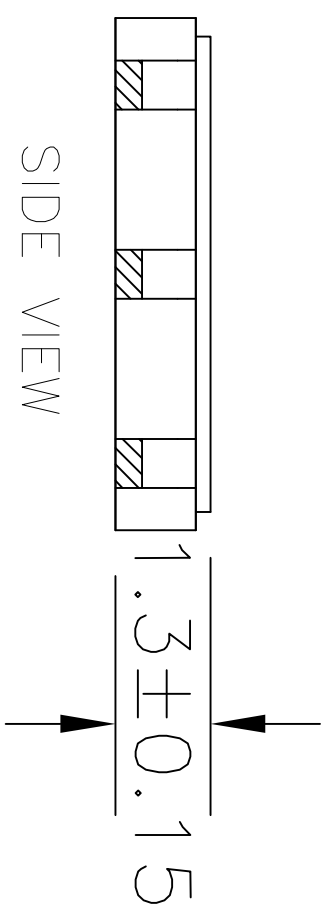


SIDE VIEW

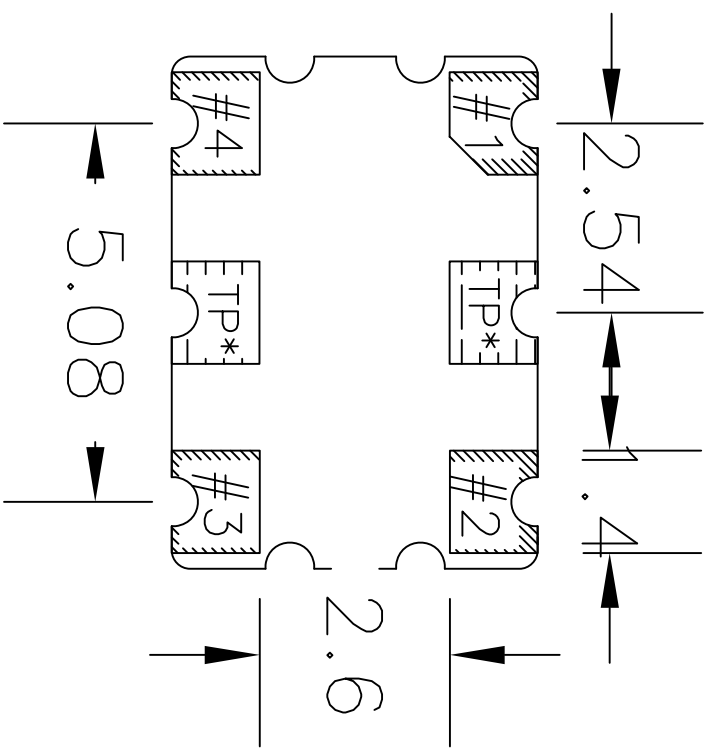


BOTTOM VIEW

NOTES:  
1. ALL DIMENSIONS IN MM.


TOLERANCES UNLESS SPECIFIED		www.IDI.com	
DECIMAL	ANGULAR	 8024 Silver Creek Valley Rd San Jose, CA 95138 PHONE: (408) 727-6116 FAX: (408) 492-8674	
XXX±	±		
XXXX±		TITLE JU4 PACKAGE OUTLINE	
APPROVALS	DATE	DRAWING No. PSC-4431	
DRAWN 3/8	10/05/12	SIZE C	
CHECKED		DO NOT SCALE DRAWING	
		REV	01
		SHEET 1 OF 2	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	10/08/12	KS
01	UPDATE PACKAGE DRAWING	8/11/14	JHUA

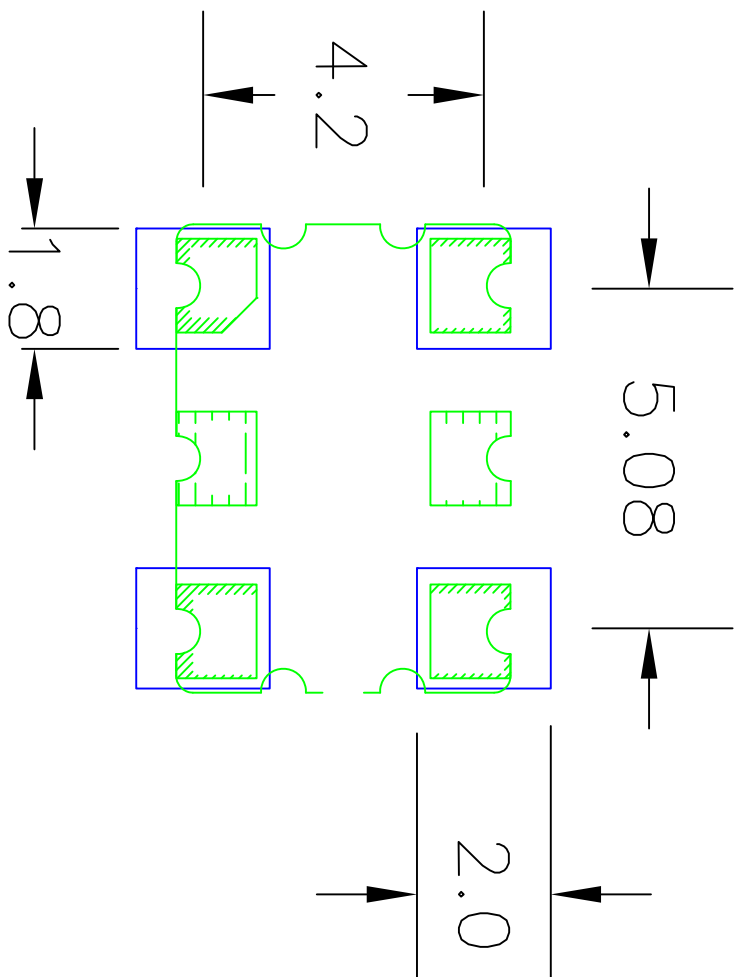

RECOMMENDED LAND PATTERN

- NOTES:
1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
  2. TOP DOWN VIEW. AS VIEWED ON PCB.
  3. COMPONENT OUTLINE SHOW FOR REFERENCE IN GREEN.
  4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
  5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

TOLERANCES UNLESS SPECIFIED		 <b>IDT</b> <sup>TM</sup> 6024 Silver Creek Valley Rd San Jose, CA 95138 PHONE: (408) 727-6116 FAX: (408) 492-8674
DECIMAL	ANGULAR	
XX±	±	
XXXX±		
APPROVALS	DATE	TITLE
DRAWN %Δ	10/08/12	J4 PACKAGE OUTLINE
CHECKED		7.0 x 5.0 mm BODY 1.3 mm Thick
SIZE	DRAWING No.	REV
C	PSC-4431	01
DO NOT SCALE DRAWING		SHEET 2 OF 2

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
  - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
  - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.) or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

## Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

## Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

## Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [integrated device tech manufacturer](#):*

Other Similar products are found below :

[82V2058XDAG](#) [70V08L20PFGI](#) [F2915NBGK](#) [557GI-05ALF](#) [853S111BYILF](#) [5V2305PGGI8](#) [9DB803DGLFT](#) [IDT71V256SA15PZ](#)  
[F2914NBGK](#) [XLL536050.000000I](#) [8SLVP1204ANLGI](#) [IDT74FCT16244ATPV](#) [74FCT2245ATSO](#) [QS32X861Q1G](#) [821034DNG](#)  
[XLL535040.000000I](#) [74FCT162244ATPVG8](#) [IDTQS32X245Q2G](#) [854S006AGILF](#) [74FCT163244APV](#) [82P33731ABAG](#) [2305B-1HDCGI](#)  
[4RCD0124KC0ATG](#) [5V41065PGGI8](#) [8T49N242-998NLGI](#) [74ALVCH16245PAG](#) [74LVCH16245APA](#) [IDTQS3384PAG](#)  
[74ALVCH162245PA](#) [5V41346PGGI](#) [8302AMLFT](#) [83905AGLFT](#) [CSPUA877ABVG8](#)