


# Product Brief

45nm Intel® Xeon® Processors

Embedded Computing



## 45nm Intel® Xeon® Processors 5400/5200 Series for Embedded Computing Platforms

Boost performance and energy efficiency for full-performance and bladed platforms

### Product Overview

These Intel® Xeon® processors, with extended lifecycle support, utilize Intel's Hafnium-based 45nm Hi-k silicon process technology to reduce power consumption, increase switching speed, and significantly increase transistor density over previous 65nm technology to 820 million transistors. The Intel® Xeon® processor E5440<sup>a</sup> delivers a 27% performance gain<sup>1</sup> within the same thermal profile over the previous-generation Intel Xeon processor E5345<sup>a</sup> (see Figure 1), making it an excellent choice for compute-intensive embedded, storage and communications applications.

Lower thermal design power (TDP) and higher Tcase temperature options are ideal for low-power consumption and/or compliance with the AdvancedTCA\* form factor and NEBS level-3 thermal specifications. The quad-core 5400 series supports 12 MB on-die L2 cache (2x6 MB) and the dual-core 5200 series supports 6 MB on-die L2 cache. All processors integrate Intel® Virtualization Technology<sup>2</sup> (Intel® VT), Intel® 64 architecture,<sup>3</sup> Intel® VT FlexMigration, and Intel® VT FlexPriority.

These quad- and dual-core processors utilize a common microarchitecture and common socket with the previous-generation Intel Xeon processor 5300 series and 5100 series, providing a simplified path to upgrades.

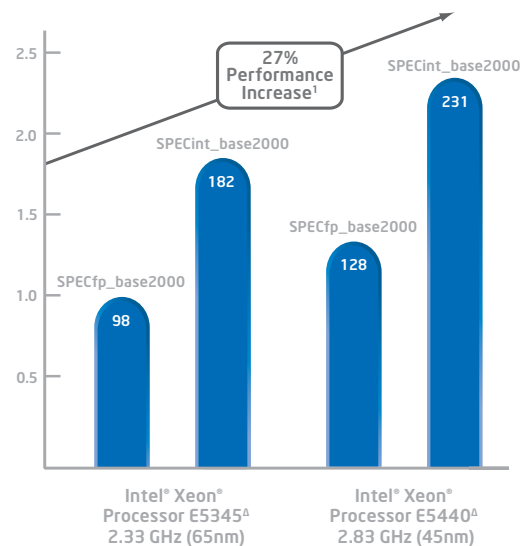


Figure 1: Performance improvements of the 45nm Intel® Xeon® processor in dual-processing configuration (eight cores per system).

## Platform Configurations

These 45nm processors are validated with two different chipsets, providing a choice of flexible, dual-processor-capable platforms for a wide range of applications. These include storage area networks, network attached storage, routers, IP-PBX, converged/unified communications platforms, sophisticated content firewalls, unified threat management systems, medical imaging equipment, military signal and image processing, and telecommunications (wireless and wireline) servers.

- Intel® 5000P chipset-based platforms** are ideal for full performance and memory-intensive applications by providing a maximum FB-DIMM memory capacity of 64 GB, 28 lanes of PCI Express\*; and accelerated I/O options. This platform offers quick migration for customers with existing Intel 5000P chipset-based designs due to the LGA 771 socket, common with the quad-core 5300 series and dual-core 5100 series, eliminating software tuning and minimizing hardware qualification efforts (see Figure 2).

- Intel® 5100 Memory Controller Hub (MCH) chipset-based platforms** are ideal for bladed and dense bladed applications requiring less than 200 watts, including AdvancedTCA\* and NEBS-compliant solutions. Platform power savings is derived from lower TDP in the MCH (25.7 watts TDP at 1333 MHz front-side bus [FSB] and 23.0 watts TDP at 1066 MHz FSB), the efficient next-generation Intel® I/O Controller Hub 9R at 4.3W TDP, and standard native DDR2 memory technology with a maximum capacity of 48 GB (see Figure 3).

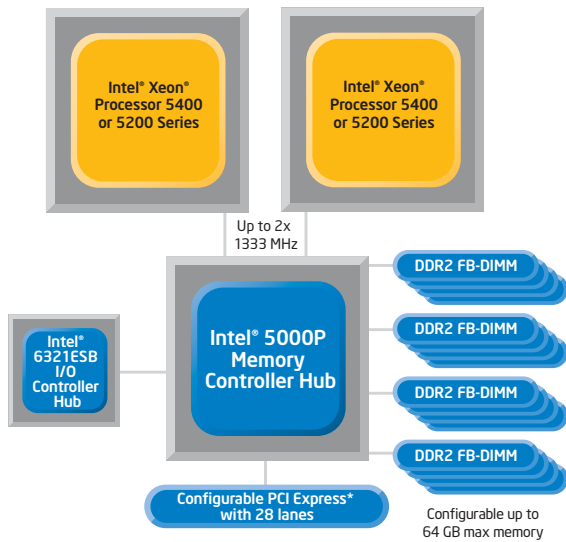


Figure 2: Intel® 5000P chipset-based platforms

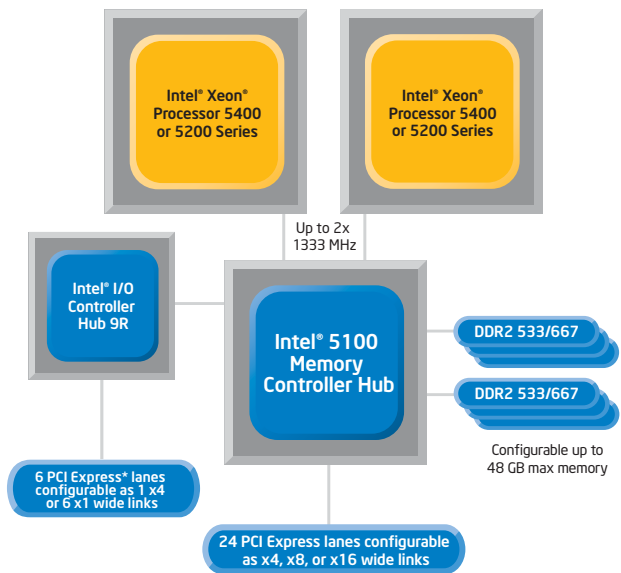


Figure 3: Intel® 5100 Memory Controller Hub chipset-based platforms

## Features

New 45nm enhanced Intel® Core™ microarchitecture

Multi-core processing

5400 series: 12 MB on-die L2 cache (2x6 MB)  
5200 series: 6 MB on-die L2 cache

Intel® Virtualization Technology<sup>2</sup>

Intel® 64 architecture<sup>3</sup>

Ultra-dense low-power processor options (L5408 at 40 W TDP)

Embedded lifecycle product support

47 new Intel® SSE4 instructions

## Benefits

- Boosts performance on multiple applications/user environments and data-demanding workloads, while enabling denser deployments through improved performance-per-watt.

- Reduced idle processor power lowers average power consumption.

- Increases performance and headroom for multi-threaded applications and heavy multi-tasking scenarios.

- Helps boost system utilization through virtualization and application responsiveness.

- Increases efficiency of L2 cache-to-core data transfers and maximizes main memory-to-processor bandwidth.

- Reduces latency by storing larger data sets closer to the processor, reducing the number of trips to main memory.

- A suite of processor enhancements assists software to deliver more efficient virtualization solutions and greater capabilities, including 64-bit guest OS support.

- Intel® VT FlexPriority, a new Intel® VT extension, optimizes virtualization software efficiency by improving interrupt handling.<sup>4</sup>

- Intel® VT FlexMigration enables Intel® Xeon® processor 5400 and 5200 series-based systems to be added to the existing virtualization pool with single, 2, or 4+ socket Intel Core microarchitecture-based systems.

- Flexibility for 64-bit and 32-bit applications and operating systems.

- Improves performance-per-watt.

- Reduces power/thermal operating costs and improves density.

- Ideal for NEBS Level-3 ambient operating temperature specifications (thermal profile).

- Ideal for smaller form factors with thermal constraints (blades), especially solutions that require compliance with AdvancedTCA\* form factor specifications (PICMG 3.0).

- Protects system investment with extended product availability.

- Improves performance of media and high-performance computing applications such as compiler, imaging, video and graphics applications.

## Intel® Xeon® Processors for Embedded Computing Platforms

(All processors utilize the LGA 771 Package)

Processor Name <sup>A</sup>	Product Number	Core Count	Core Speed	L2 Cache	FSB Speed	TDP	Optimized for Low Power and/or ATCA/NEBS	Tcase (Highest short term/ Nominal)	Validated with Intel® 5000P chipset	Validated with Intel® 5100 MCH chipset
Intel® Xeon® processor E5440	AT80574KJ073N	Quad-Core	2.83 GHz	12 MB	1333 MHz	80 W	No	67° C	Yes	No
Intel® Xeon® processor L5410	AT80574JJ053N	Quad-Core	2.33 GHz	12 MB	1333 MHz	50 W	Yes	57° C	Yes	Yes
Intel® Xeon® processor L5408	AT80574JH046NT	Quad-Core	2.13 GHz	12 MB	1066 MHz	40 W	Yes	87° C/72° C	Yes	Yes
Intel® Xeon® processor E5240	AT80573QJ0806M	Dual-Core	3.0 GHz	6 MB	1333 MHz	65 W	No	66° C	Yes	No
Intel® Xeon® processor E5220	AT80573QJ0536M	Dual-Core	2.33 GHz	6 MB	1333 MHz	65 W	No	66° C	Yes	Yes
Intel® Xeon® processor L5238	AT80573JJ0676MT	Dual-Core	2.66 GHz	6 MB	1333 MHz	35 W	Yes	86° C/71° C	Yes	Yes

## Intel in Embedded and Communications: [intel.com/embedded](http://intel.com/embedded)

<sup>4</sup> Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. Go to: [http://www.intel.com/products/processor\\_number](http://www.intel.com/products/processor_number).

<sup>1</sup> Benchmarking results collected by Intel Corporation, August 2007 and October 2007.

• Platform Configurations:

- Intel® Xeon® processor E5345, 2.33 GHz, 8 MB L2 cache, 1333 MHz FSB, Intel® 5000P Chipset 8x1G-Dual-Rank-FBD-DDR2-667
- Intel® Xeon® processor E5440, 2.83 GHz, 12 MB L2 cache, 1333 MHz FSB, Intel® 5000P Chipset 8x1G-Dual-Rank-FBD-DDR2-667

• Software Configurations:

- Intel® Xeon® processor E5345: OS: Microsoft Windows® Enterprise Server SP1; Compiler: Intel® C/C++/FORTRAN 9.1; Benchmark: CPU2000 v1.3
- Intel® Xeon® processor E5440: OS: Microsoft Windows® Enterprise Server SP1; Compiler: Intel® C/C++/FORTRAN 9.1; Benchmark: CPU2000 v1.3

Results have been estimated based on internal Intel analysis and are provided for informational purposes only. Any difference in system hardware or software design or configuration may affect actual performance.

<sup>2</sup> Intel® Virtualization Technology requires a computer system with an enabled Intel® processor, BIOS, virtual machine monitor (VMM). Functionality, performance or other benefits will vary depending on hardware and software configurations. Software applications may not be compatible with all operating systems. Consult your PC manufacturer. For more information, visit <http://www.intel.com/go/virtualization>

<sup>3</sup> Requires a system with a 64-bit enabled processor, chipset, BIOS and software. Performance will vary depending on the specific hardware and software you use. Consult your PC manufacturer for more information. For more information, visit <http://www.intel.com/info/em64t>.

<sup>4</sup> Intel internal measurement. Platforms running 4 x Intel® Xeon® processor X7350, 32 GB memory, vConsolidate Beta 2, Virtual Iron 4.0.2 software. 1 CSU configuration, Sept 2007. Boot time improvement measured on Windows XP.\*  
vConsolidate measurement conducted by configuring the system with Windows 2000 SP4.

Performance results are based on certain tests measured on specific computer systems. Any difference in system hardware, software or configurations will affect actual performance. For more information go to <http://www.intel.com/performance>.


INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. UNLESS OTHERWISE AGREED IN WRITING BY INTEL, THE INTEL PRODUCTS ARE NOT DESIGNED NOR INTENDED FOR ANY APPLICATION IN WHICH THE FAILURE OF THE INTEL PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request. Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order. Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or by visiting Intel's Web site at [www.intel.com](http://www.intel.com).

Copyright © 2011 Intel Corporation. All rights reserved. Intel, the Intel logo, Xeon, and Intel Core are trademarks of Intel Corporation in the U.S. and other countries.

\*Other names and brands may be claimed as the property of others.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for CPU - Central Processing Units category:*

*Click to view products by Intel manufacturer:*

Other Similar products are found below :

[D8751H](#) [AT80612003090AAS LBWJ](#) [N87C51](#) [IVPX7225-RTM-1](#) [CM8063401286600S R1AK](#) [CM8063501374802S R1A5](#)  
[CM8063501375101S R1A8](#) [MATXM-CORE-411-HTSNK](#) [BGSF 1717MN26 E6327](#) [BX80621E52620 S R0KW](#) [IVPX7225-02250813L](#)  
[D8086-2](#) [CM8063401293902S R1A4](#) [CM8063501374901S R1A6](#) [CM8066201928505 SR2HT](#) [CM8063501293200S R1A0](#)  
[CM8062301046008S R060](#) [ATLASEDGE.1](#) [AV8063801129600S R10F](#) [R0K5ML001SS00BR](#) [CM8066201921712S R2LF](#)  
[CM8064601467102S R152](#) [CM8063701094000S R0TA](#) [CM8063501375800S R1AX](#) [CM8063401376400S R1A9](#) [CM8063401293802S R1A3](#)  
[CM8063401286102S R19S](#) [CM8062107185405S R0KM](#) [CM8066002032201S R2R6](#) [CM8063501288301S R1AN](#) [COMX-300-HSP](#) [RTM-](#)  
[ATCA-7360](#) [96MPI7-3.4-8M11T](#) [96MPP-2.3-3M10T](#) [96MPI7-3.4-8M11T1](#) [96MPXE-2.0-15M20T](#) [96MPI5-3.0-6M10T](#) [96MPI5S-2.3-](#)  
[6M11T1](#) [FJ8066401715827S R2KG](#) [AFPC205 S R1Z1](#) [DNCE2510 S LHCM](#) [FJ8066401715843S R2KH](#) [DNCE2530G S LHCY](#)  
[DNCE2510GU S LHCW](#) [CM8066201935807S R2LM](#) [FH8065503554000S R3H4](#) [FH8065301615104S R1UU](#) [CM8066201934909S R2LK](#)  
[FJ8067702739633S R340](#) [CM8068403360212 SR3XB](#)