Add to Compare



Search specifications





# Intel® Core™ i7-4900MQ Processor

8M Cache, up to 3.80 GHz

#### Specifications

#### Essentials

Performance

Supplemental Information

**Memory Specifications** 

**Processor Graphics** 

**Expansion Options** 

Package Specifications

Advanced Technologies

Security & Reliability

#### Ordering and Compliance


#### **Product Images**

#### **Compatible Products**

Downloads and Software

| Essentials                                   | <b>●</b> Export specificati               |
|--|---|
| Product Collection                           | 4th Generation Intel® Core™ i7 Processors |
| Code Name                                    | Products formerly Haswell                 |
| Vertical Segment                             | Mobile                                    |
| Processor Number                             | i7-4900MQ                                 |
| Status                                       | Launched                                  |
| Launch Date ?                                | Q2'13                                     |
| Lithography 💽                                | 22 nm                                     |
| Recommended Customer Price ?                 |   |
| Performance                                  |   |
| # of Cores ?                                 | 4   |
| # of Threads ?                               | 8   |
| Processor Base Frequency ?                   | 2.80 GHz                                  |
| Max Turbo Frequency ?                        | 3.80 GHz                                  |
| Cache ?                                      | 8 MB SmartCache                           |
| Bus Speed ?                                  | 5 GT/s DMI2                               |
| TDP ?  | 47 W                                      |
| Supplemental Information                     |   |
| Embedded Options Available ?                 | No  |
| Datasheet                                    | View now                                  |
| Memory Specifications                        |   |
| Max Memory Size (dependent on memory type) ? | 32 GB                                     |
| Memory Types ?                               | DDR3L 1333/1600                           |
| Max # of Memory Channels ?                   | 2   |
| Max Memory Bandwidth ?                       | 25.6 GB/s                                 |
| ECC Memory Supported ‡ ?                     | No  |
| Processor Graphics                           |   |
| Processor Graphics ‡ ?                       | Intel® HD Graphics 4600                   |
| Graphics Base Frequency ?                    | 400 MHz                                   |

| Graphics Max Dynamic Frequency ?                        | 1.30 GHz                                       |
|---|--|
| Graphics Video Max Memory 💽                             | 2 GB   |
| Graphics Output 💿                                       | eDP/DP/HDMI/VGA                                |
| Max Resolution (HDMI 1.4)‡ 🕡                            | 3840x2160@60Hz                                 |
| Max Resolution (DP)‡ 🔞                                  | 3840x2160@60Hz                                 |
| Max Resolution (VGA)‡ 💿                                 | 2880x1800@60Hz                                 |
| DirectX* Support 🔞                                      | 11.2/12  |
| OpenGL* Support 💿                                       | 4.3  |
| Intel® Quick Sync Video 💿                               | Yes  |
| Intel® InTru™ 3D Technology 🕐                           | Yes  |
| Intel® Flexible Display Interface (Intel® FDI) 👔        | Yes  |
| Intel® Clear Video HD Technology 👔                      | Yes  |
| # of Displays Supported <sup>‡</sup>                    | 3  |
| Device ID   | 0x416  |
| Expansion Options                                       |  |
| PCI Express Revision ?                                  | 3  |
| PCI Express Configurations ‡ ?                          | 1x16, 2x8, 1x8 2x4                             |
| Max # of PCI Express Lanes ?                            | 16   |
| Package Specifications                                  |  |
| Sockets Supported ?                                     | FCPGA946                                       |
| Max CPU Configuration                                   | 1  |
| TJUNCTION ?   | 100°C  |
| Package Size  | 37.5mm x 37.5mm x 4.7mm                        |
| Low Halogen Options Available                           | See MDDS                                       |
| Advanced Technologies                                   |  |
| Intel® Turbo Boost Technology ‡ 👔                       | 2.0  |
| Intel® vPro™ Platform Eligibility ‡                     | Yes  |
| Intel® Hyper-Threading Technology ‡ 🔞                   | Yes  |
| Intel® Virtualization Technology (VT-x) † 🔞             | Yes  |
| Intel® Virtualization Technology for Directed I/O (VT-d | d) <sup>‡</sup> ?                              |
| Intel® VT-x with Extended Page Tables (EPT) ‡ ?         | Yes  |
| Intel® TSX-NI ?   | No   |
| Intel® 64 ‡ 💽   | Yes  |
| Instruction Set ?                                       | 64-bit   |
|   |  |
| Instruction Set Extensions ?                            | Intel® SSE4.1, Intel® SSE4.2, Intel® AVX2      |
|   | Intel® SSE4.1, Intel® SSE4.2, Intel® AVX2  Yes |
| Instruction Set Extensions ?                            |  |

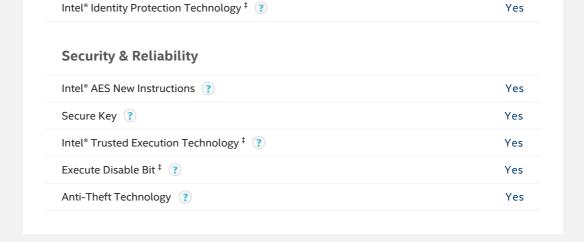

More support options for Intel® Core™ i7-4900MQ Processor (8M Cache, up to 3.80 GHz)











### Need more help?

Contact support



All information provided is subject to change at any time, without notice. Intel may make changes to manufacturing life cycle, specifications, and product descriptions at any time, without notice. The information herein is provided "as-is" and Intel does not make any representations or warranties whatsoever regarding accuracy of the information, nor on the product features, availability, functionality, or compatibility of the products listed. Please contact system vendor for more information on specific products or systems.

Intel classifications are for informational purposes only and consist of Export Control Classification Numbers (ECCN) and Harmonized Tariff Schedule (HTS) numbers. Any use made of Intel classifications are without recourse to Intel and shall not be construed as a representation or warranty regarding the proper ECCN or HTS. Your company as an importer and/or exporter is responsible for determining the correct classification of your transaction.

Refer to Datasheet for formal definitions of product properties and features.

"Announced" SKUs are not yet available. Please refer to the Launch Date for market availability.

Some products can support AES New Instructions with a Processor Configuration update, in particular, i7-2630QM/i7-2635QM, i7-2670QM/i7-2675QM, i5-2430M/i5-2435M, i5-2410M/i5-2415M. Please contact OEM for the BIOS that includes the latest Processor configuration update.

‡ This feature may not be available on all computing systems. Please check with the system vendor to determine if your system delivers this feature, or reference the system specifications (motherboard, processor, chipset, power supply, HDD, graphics controller, memory, BIOS, drivers, virtual machine monitor-VMM, platform software, and/or operating system) for feature compatibility. Functionality, performance, and other benefits of this feature may vary depending on system configuration.

See http://www.intel.com/content/www/us/en/architecture-and-technology/hyper-threading/hyper-threading-technology.html? wapkw=hyper+threading for more information including details on which processors support Intel® HT Technology.

Max Turbo Frequency refers to the maximum single-core processor frequency that can be achieved with Intel® Turbo Boost Technology. See www.intel.com/technology/turboboost/ for more information.

The Recommended Customer Price ("RCP") is pricing guidance for Intel products. Prices are for direct Intel customers, typically represent 1,000-unit purchase quantities, and are subject to change without notice. Taxes and shipping, etc. not included. Prices may vary for other package types and shipment quantities, and special promotional arrangements may apply. If sold in bulk, price represents individual unit. Listing of these RCP does not constitute a formal pricing offer from Intel. Please work with your appropriate Intel representative to obtain a formal price quotation.

 $System\ and\ Maximum\ TDP\ is\ based\ on\ worst\ case\ scenarios.\ Actual\ TDP\ may\ be\ lower\ if\ not\ all\ I/Os\ for\ chipsets\ are\ used.$ 

Low Halogen: Applies only to brominated and chlorinated flame retardants (BFRs/CFRs) and PVC in the final product. Intel components as well as purchased components on the finished assembly meet JS-709 requirements, and the PCB / substrate meet IEC 61249-2-21 requirements. The replacement of halogenated flame retardants and/or PVC may not be better for the environment.

For benchmarking data see http://www.intel.com/performance.

Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. See <a href="http://www.intel.com/content/www/us/en/processors/processor-numbers.html">http://www.intel.com/content/www/us/en/processors/processor-numbers.html</a> for details.

Processors that support 64-bit computing on Intel® architecture require an Intel 64 architecture-enabled BIOS.



Company Information Our Commitment Communities Investor Relations Contact Us Newsroom Jobs



© Intel Corporation | Terms of Use | \*Trademarks | Privacy | Cookies | Supply Chain Transparency | Site Map

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Microprocessors - MPU category:

Click to view products by Intel manufacturer:

Other Similar products are found below:

MC68302EH20C MC7457RX1000LC MC7457RX1267LC MC7457VG1267LC A2C00010998 A A2C52004004 R5F117BCGNA#20 R5F52106BDLA#U0 R5S72690W266BG#U0 ADJ3400IAA5DOE MPC8245TVV266D MPC8245TZU300D MPC8260ACVVMHBB MPC8323ECVRAFDCA MPC8323VRADDCA MPC8536ECVJAVLA BOXNUC5PGYH0AJ 20-668-0024 P1010NSN5DFB P2010NSE2KHC P2010NSN2MHC P2020NXE2HHC P5020NSE7QMB P5020NSE7TNB P5020NSE7VNB LS1020ASN7KQB LS1020AXN7HNB LS1020AXN7KQB A2C00010729 A A2C00039344 T1022NSE7MQB T1022NXN7PQB T1023NSE7MQA T1024NXE7PQA T1042NSE7MQB T1042NSN7MQB T1042NXN7WQB T2080NSE8TTB T2080NSN8PTB T2080NXE8TTB T2081NXN8TTB R5F101AFASP#V0 MC68302CEH20C TS68040MF33A MPC8260ACVVMIBB MPC8280CZUUPEA MPC8313ECVRAFFC MPC8313ECVRAGDC MPC8313EVRADDC MPC8313EVRAFFC