

## J270, J271 P-Channel JFET

### Features

- InterFET [P0099F Geometry](#)
- Low Noise: 6 nV/VHz Typical
- RoHS Compliant
- SMT, TH, and Bare Die Package options.


### Applications

- Analog Switch
- Sample and Hold
- Low Noise, High Gain Amplifier



### Description

The -30V InterFET J270 and J271 JFET is targeted for low noise high gain amplifiers and switch applications. The J270 has a cutoff voltage of less than 2.0V ideal for low-level power supplies.

SOT23 Top View

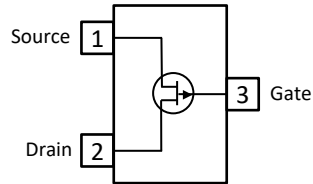

TO-92 Bottom View



### Product Summary

Parameters		J270 Min	J271 Min	Unit
$BV_{GSS}$	Gate to Source Breakdown Voltage	30	30	V
$I_{DSS}$	Drain to Source Saturation Current	-2	-6	mA
$V_{GS(off)}$	Gate to Source Cutoff Voltage	0.5	1.5	V
$G_{fs}$	Forward Transconductance	6	8	mS

### Ordering Information Custom Part and Binning Options Available

Part Number	Description	Case	Packaging
J270; J271	Through-Hole	TO-92	Bulk
SMPJ270; SMPJ271	Surface Mount	SOT23	Bulk
SMPJ270TR; SMPJ271TR	7" Tape and Reel: Max 3,000 Pieces 13" Tape and Reel: Max 9,000 Pieces	SOT23	Minimum 1,000 Pieces Tape and Reel
J270COT; J271COT	Chip Orientated Tray (COT Waffle Pack)	COT	400/Waffle Pack
J270CFT; J271CFT	Chip Face-up Tray (CFT Waffle Pack)	CFT	400/Waffle Pack



**Disclaimer:** It is the Buyers responsibility for designing, validating and testing the end application under all field use cases and extreme use conditions. Guaranteeing the application meets required standards, regulatory compliance, and all safety and security requirements is the responsibility of the Buyer. These resources are subject to change without notice.

## Electrical Characteristics

### Maximum Ratings (@ $T_A = 25^\circ\text{C}$ , Unless otherwise specified)

Parameters	Value	Unit
$V_{RGS}$ Reverse Gate Source and Gate Drain Voltage	30	V
$I_{FG}$ Continuous Forward Gate Current	50	mA
$P_D$ Continuous Device Power Dissipation	360	mW
$P$ Power Derating	2.8	mW/ $^\circ\text{C}$
$T_J$ Operating Junction Temperature	-55 to 125	$^\circ\text{C}$
$T_{STG}$ Storage Temperature	-65 to 200	$^\circ\text{C}$

### Static Characteristics (@ $T_A = 25^\circ\text{C}$ , Unless otherwise specified)

Parameters	Conditions	J270		J271		Unit
		Min	Max	Min	Max	
$V_{(BR)GSS}$ Gate to Source Breakdown Voltage	$V_{DS} = 0V, I_G = 1\mu\text{A}$	30		30		V
$I_{GSS}$ Gate to Source Reverse Current	$V_{GS} = 10V, V_{DS} = 0V$		200		200	pA
$V_{GS(OFF)}$ Gate to Source Cutoff Voltage	$V_{DS} = -10V, V_{GS} = 0V$	0.5	2	1.5	4.5	V
$I_{DSS}$ Drain to Source Saturation Current	$V_{GS} = 0V, V_{DS} = -10V$ (Pulsed)	-2	15	-6	-50	mA

### Dynamic Characteristics (@ $T_A = 25^\circ\text{C}$ , Unless otherwise specified)

Parameters	Conditions	J270		J271		Unit
		Min	Max	Min	Max	
$G_{FS}$ Forward Transconductance	$V_{DS} = -10V, V_{GS} = 0V, f = 1\text{kHz}$	6	15	8	18	mS
$C_{iss}$ Input Capacitance	$V_{DS} = -10V, V_{GS} = 0V, f = 1\text{MHz}$		32		32	pF
$C_{rss}$ Reverse Transfer Capacitance	$V_{DS} = -10V, V_{GS} = 0V, f = 1\text{MHz}$		4		4	pF
$e_n$ Noise Voltage	$V_{DS} = 10V, I_D = 5\text{mA}, f = 1\text{kHz}$	6 (typ)		6 (typ)		nV/ $\sqrt{\text{Hz}}$

## SOT23 (TO-236AB) Mechanical and Layout Data

### Package Outline Data



1. All linear dimensions are in millimeters.
2. Package weight approximately 0.12 grams
3. Molded plastic case UL 94V-0 rated
4. For Tape and Reel specifications refer to InterFET CTC-021 Tape and Reel Specification, Document number: IF39002
5. Bulk product is shipped in standard ESD shipping material
6. Refer to JEDEC standards for additional information.




### Suggested Pad Layout



1. All linear dimensions are in millimeters.
2. The suggested land pattern dimensions have been provided for reference only. A more robust pattern may be desired for wave soldering.


## TO-92 Mechanical and Layout Data

### Package Outline Data

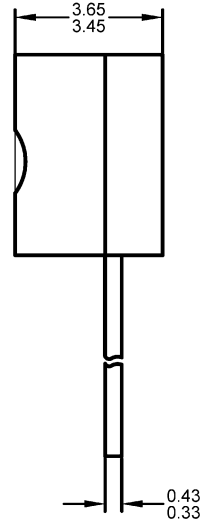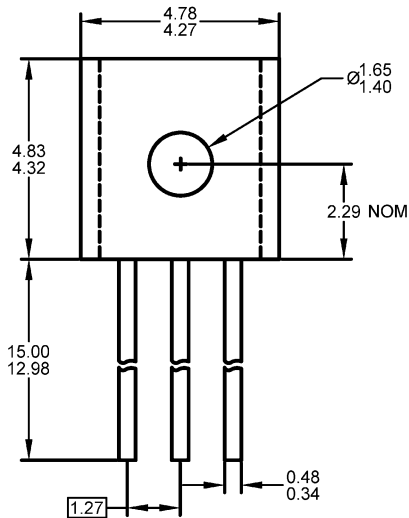

1. All linear dimensions are in millimeters.
2. Package weight approximately 0.19 grams
3. Molded plastic case UL 94V-0 rated
4. Bulk product is shipped in standard ESD shipping material
5. Refer to JEDEC standards for additional information.

### Suggested Through-Hole Layout

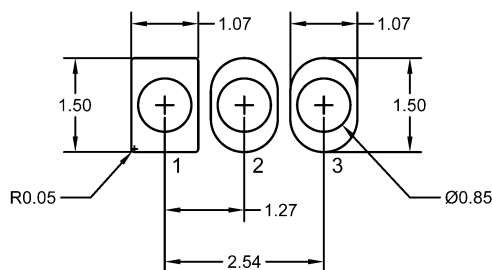

1. All linear dimensions are in millimeters.
2. The suggested land pattern dimensions have been provided as a straight lead reference only. A more robust pattern may be desired for wave soldering and/or bent lead configurations.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [JFET](#) category:*

*Click to view products by [InterFET](#) manufacturer:*

Other Similar products are found below :

[MCH3914-8-TL-H](#) [F5606](#) [2SK2394-6-TB-E](#) [CPH5901G-TL-E](#) [MCH3914-7-TL-H](#) [MCH5908H-TL-E](#) [CPH5902G-TL-E](#) [CPH5905G-TL-E](#)  
[CPH5905H-TL-E](#) [2SK2394-7-TB-E](#) [NSVJ2394SA3T1G](#) [2N3819](#) [PN4393](#) [MMBFJ176](#) [2N4393](#) [U311](#) [2N5397](#) [2SK208-GR\(TE85L,F\)](#)  
[MMBF4393LT1G](#) [J176\\_D74Z](#) [IF4500](#) [SMP4338](#) [SMP147](#) [SMP4117](#) [SMP5116](#) [SMPJ232](#) [SMPJ310](#) [SMPJ109](#) [SMP4856](#) [IF1330](#)  
[SMPJ201](#) [SMP4340](#) [SMP5484](#) [IFN5566](#) [2N2609](#) [2N3821](#) [2N3970](#) [2N3971](#) [2N3972](#) [2N4091](#) [2N4092](#) [2N4093](#) [2N4118](#) [2N4118A](#) [2N4221](#)  
[2N4221A](#) [2N4338](#) [2N4339](#) [2N4416](#) [2N4416A](#)