




SPECIFICATIONS: LINEAR POWER SUPPLY IHB155-0.12

MADE IN THE U.S.A.

VAC INPUT:	VAC JUMPERING AND FUSING REQUIREMENTS: SILKSCREENED ON CHASSIS FOR TRANSFORMER PRIMARY TERMINALS																				
<ul style="list-style-type: none"> 100/120/220/240 VAC, +10%, -13% TOLERANCE FOR 230 VAC IS +15%, -10% FREQUENCY RANGE: 47-63HZ 	<table border="1"> <thead> <tr> <th>For Use at</th><th>100VAC</th><th>120VAC</th><th>220VAC</th><th>230/240VAC</th></tr> </thead> <tbody> <tr> <td>Jumper</td><td>1&3, 2&4</td><td>1&3, 2&4</td><td>2&3</td><td>2&3</td></tr> <tr> <td>Apply AC</td><td>1&5</td><td>4&1</td><td>1&5</td><td>4&1</td></tr> <tr> <td>Max Current / Fuse Rating</td><td>0.50A</td><td></td><td></td><td>0.25A</td></tr> </tbody> </table>	For Use at	100VAC	120VAC	220VAC	230/240VAC	Jumper	1&3, 2&4	1&3, 2&4	2&3	2&3	Apply AC	1&5	4&1	1&5	4&1	Max Current / Fuse Rating	0.50A			0.25A
For Use at	100VAC	120VAC	220VAC	230/240VAC																	
Jumper	1&3, 2&4	1&3, 2&4	2&3	2&3																	
Apply AC	1&5	4&1	1&5	4&1																	
Max Current / Fuse Rating	0.50A			0.25A																	
VDC OUTPUT:	OVERVOLTAGE PROTECTION: <ul style="list-style-type: none"> NOT PROVIDED. AVAILABLE BY ADDING AN IOVP12 MODULE SHORT CIRCUIT PROTECTION: <ul style="list-style-type: none"> AUTOMATIC FOLDBACK OVERLOAD PROTECTION: <ul style="list-style-type: none"> AUTOMATIC CURRENT LIMIT 																				
LINE REGULATION:	LOAD REGULATION: <ul style="list-style-type: none"> +/- 0.05% FOR A 50% LOAD CHANGE (DERATE OUTPUT CURRENT 10% FOR 50 HZ OPERATION) 																				
OUTPUT RIPPLE: 5.0mV PK-PK MAXIMUM	TRANSIENT RESPONSE: < 50 μ sec per 50% LOAD CHANGE																				
TEMPERATURE RATINGS:	TEMPERATURE COEFFICIENT: <ul style="list-style-type: none"> TYPICAL: 0.01%/DEGREE C MAXIMUM: 0.03%/DEGREE C 																				
STABILITY: +/- 0.3% FOR 24 HOURS AFTER 1 HOUR WARM-UP	EFFICIENCY (TYPICAL): 55%																				
VIBRATION:	SHOCK: <ul style="list-style-type: none"> MIL-STD-810G, METHOD 514.6, CATEGORY 1, PROCEDURE I RANDOM VIBRATION 10Hz - 2KHz, 6.15 grams (3 axis) 																				
REMOTE SENSING: NOT PROVIDED	EMI/RFI: INHERENT LOW CONDUCTED AND RADIATED NOISE LEVELS. <ul style="list-style-type: none"> EMI: FCC CFR TITLE 47 PART 15 SUB-PART B RFI: EN55022/CISPR22-LEVEL B COMPATIBILITY 																				



CASE SIZE: B

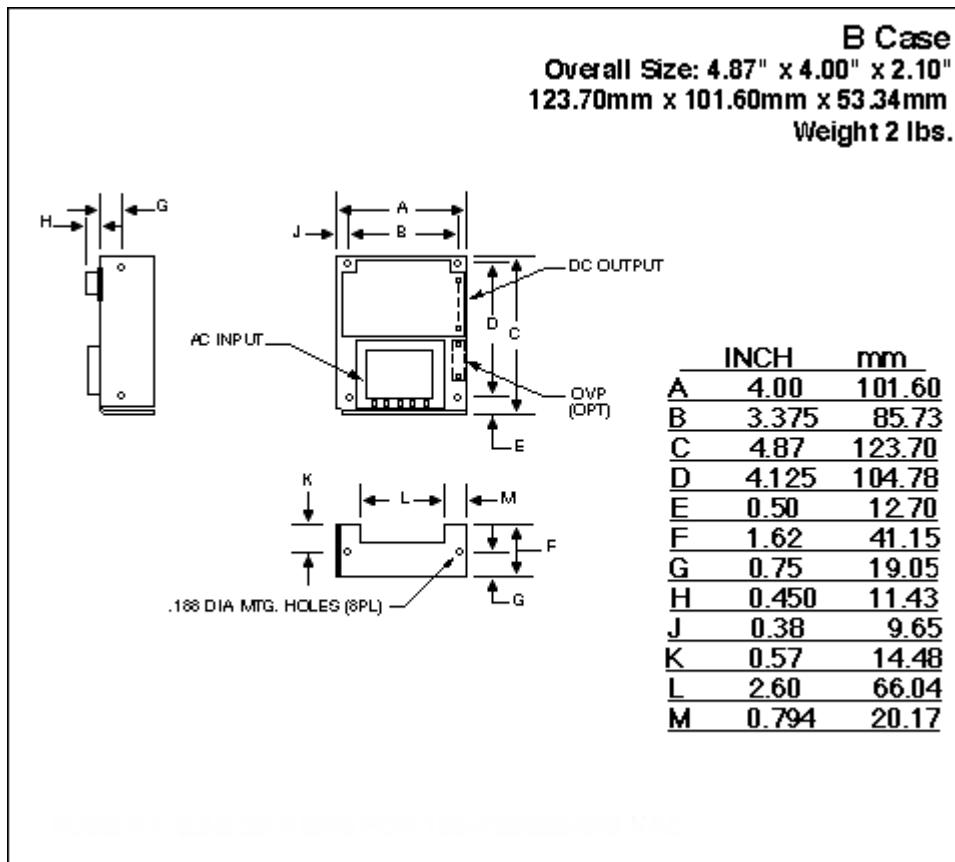

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Power Supplies](#) category:

Click to view products by [International Power manufacturer:](#)

Other Similar products are found below :

[IF15-15](#) [IHB200-0.12](#) [IHBAAC-40W](#) [IHC12-3.4](#) [IHC28-2.0](#) [IHC48-1.0](#) [IHD28-4.0](#) [IHE5-18/OVP](#) [IP500U24](#) [IP500U48](#) [IF5-25/OVP](#)
[IHB250-0.1](#) [IHC15-3.0](#) [IHC24-2.4](#) [IHCAA-60W](#) [IHCC24-2.4](#) [IP500U36](#) [IHA15-0.9](#) [IP500U65](#) [PPS-03-X](#) [XPDCAA](#) [IHA5-1.5/OVP](#)
[IHAD15-0.4](#) [IHB120-0.2A](#) [IHB12-1.7](#) [IHC5-6/OVP](#) [IHCC15-3.0](#) [IHD12-6.8](#) [IHDC-150W](#) [IHTAA-16W](#) [IOVP12](#) [HAA24-0.6-AG](#)
[HCC512-AG](#) [HCC5-6/OVP-AG](#) [HDCC-150W-AG](#) [ICP131](#) [IG5-35/OVP](#) [IHA5-1.2/OVP](#) [IHAA15-0.8](#) [IHAA24-0.6](#) [IHAD12-0.4](#) [IHB155-0.12](#) [IHB48-0.5](#) [IHBB512](#) [IHBB5-3/OVP](#) [IHBCC512](#) [IHCBB-75W](#) [IHD48-3.0](#) [IHE28-6.0](#) [IHN24-3.6](#)