

IV2Q06025D7Z – 650V 25mΩ Gen2 Automotive SiC MOSFET

Features

- 2nd Generation SiC MOSFET Technology with +18V gate drive
- High blocking voltage with low on-resistance
- High speed switching with low capacitance
- High operating junction temperature capability
- Very fast and robust intrinsic body diode
- Kelvin gate input easing driver circuit design


Applications

- Motor drivers
- Solar inverters
- Automotive DC/DC converters
- Automotive compressor inverters
- Switch mode power supplies


Outline:



TO263-7

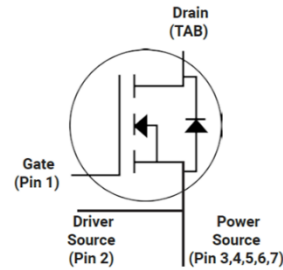

Marking Diagram:



2Q06025D7Z = Specific Device Code
 YY = Year
 WW = Work Week
 Z = Assembly Location
 XXXX = Lot Traceability

Absolute Maximum Ratings (T_c=25°C unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
V _{DS}	Drain-Source voltage	650	V	V _{GS} =0V, I _D =100μA	
V _{GSmax} (DC)	Maximum DC voltage	-5 to 20	V	Static (DC)	
V _{GSmax} (Spike)	Maximum spike voltage	-10 to 23	V	Duty cycle<1%, and pulse width<200ns	
V _{GSon}	Recommended turn-on voltage	18±0.5	V		
V _{GSoff}	Recommended turn-off voltage	-3.5 to -2	V		
I _D	Drain current (continuous)	111	A	V _{GS} =18V, T _c =25°C	Fig. 23
		83	A	V _{GS} =18V, T _c =100°C	
I _{DM}	Drain current (pulsed)	277	A	Pulse width limited by SOA	Fig. 26
P _{TOT}	Total power dissipation	600	W	T _c =25°C	Fig. 24
T _{stg}	Storage temperature range	-55 to 175	°C		
T _J	Operating junction temperature	-55 to 175	°C		
T _L	Solder Temperature	260	°C	wave soldering only allowed at leads, 1.6mm from case for 10 s	

Thermal Data

Symbol	Parameter	Value	Unit	Note
R _{θ(j-c)}	Thermal Resistance from Junction to Case	0.25	°C/W	Fig. 25

Electrical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value			Unit	Test Conditions	Note
		Min.	Typ.	Max.			
I_{DSS}	Zero gate voltage drain current		3	100	μA	$V_{DS}=650\text{V}, V_{GS}=0\text{V}$	
I_{GSS}	Gate leakage current			± 100	nA	$V_{DS}=0\text{V}, V_{GS}=-5\sim 20\text{V}$	
V_{TH}	Gate threshold voltage	1.8	2.8	4.5	V	$V_{GS}=V_{DS}, I_D=12\text{mA}$	Fig. 8, 9
			2.0			$V_{GS}=V_{DS}, I_D=12\text{mA}$ @ $T_J=175^\circ\text{C}$	
R_{ON}	Static drain-source on-resistance		25	33	$\text{m}\Omega$	$V_{GS}=18\text{V}, I_D=40\text{A}$ @ $T_J=25^\circ\text{C}$	Fig. 4, 5, 6, 7
			38		$\text{m}\Omega$	$V_{GS}=18\text{V}, I_D=40\text{A}$ @ $T_J=175^\circ\text{C}$	
C_{iss}	Input capacitance		3090		pF	$V_{DS}=600\text{V}, V_{GS}=0\text{V},$ $f=1\text{MHz}, V_{AC}=25\text{mV}$	Fig. 16
C_{oss}	Output capacitance		251		pF		
C_{rss}	Reverse transfer capacitance		19		pF		
E_{oss}	C_{oss} stored energy		52		μJ		Fig. 17
Q_g	Total gate charge		125		nC	$V_{DS}=400\text{V}, I_D=40\text{A},$ $V_{GS}=-3$ to 18V	Fig. 18
Q_{gs}	Gate-source charge		35.7		nC		
Q_{gd}	Gate-drain charge		38.5		nC		
R_g	Gate input resistance		1.5		Ω	$f=1\text{MHz}$	
E_{ON}	Turn-on switching energy		271		μJ	$V_{DS}=400\text{V}, I_D=40\text{A},$ $V_{GS}=-3.5$ to $18\text{V},$ $R_{G(ext)}=3.3\Omega,$ $L=200\mu\text{H}$ $T_J=25^\circ\text{C}$	Fig. 19, 20
E_{OFF}	Turn-off switching energy		75		μJ		
$t_{d(on)}$	Turn-on delay time		13.0		ns		
t_r	Rise time		23.4				
$t_{d(off)}$	Turn-off delay time		35.1				
t_f	Fall time		11.5				
E_{ON}	Turn-on switching energy		319		μJ	$V_{DS}=400\text{V}, I_D=40\text{A},$ $V_{GS}=-3.5$ to $18\text{V},$ $R_{G(ext)}=3.3\Omega, L=200\mu\text{H}$ $T_J=175^\circ\text{C}$	Fig. 22
E_{OFF}	Turn-off switching energy		86		μJ		

Reverse Diode Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value			Unit	Test Conditions	Note
		Min.	Typ.	Max.			
V_{SD}	Diode forward voltage		3.7		V	$I_{SD}=20\text{A}, V_{GS}=0\text{V}$	Fig. 10, 11, 12
			3.5		V	$I_{SD}=20\text{A}, V_{GS}=0\text{V},$ $T_J=175^\circ\text{C}$	
t_{rr}	Reverse recovery time		44		ns	$V_{GS}=-3.5\text{V}/+18\text{V},$	
Q_{rr}	Reverse recovery charge		187		nC	$I_{SD}=40\text{A}, V_R=400\text{V},$	
I_{RRM}	Peak reverse recovery current		19.2		A	$R_{G(ext)}=10\Omega, L=200\mu\text{H}$ $di/dt=3000\text{A}/\mu\text{s}$	

Typical Performance (curves)

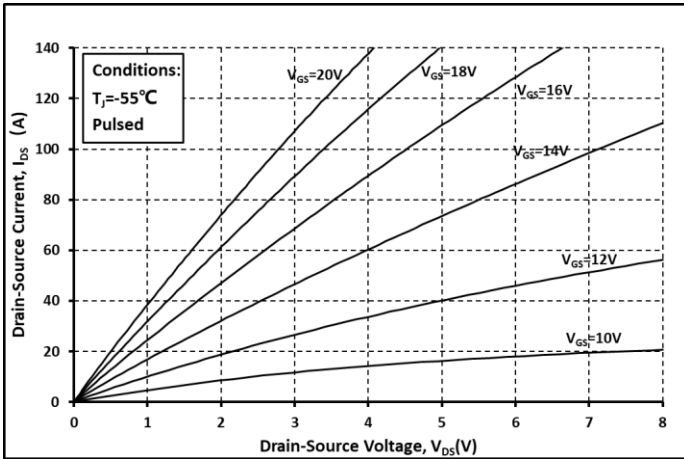


Fig. 1 Output Curve @ $T_j = -55^\circ\text{C}$

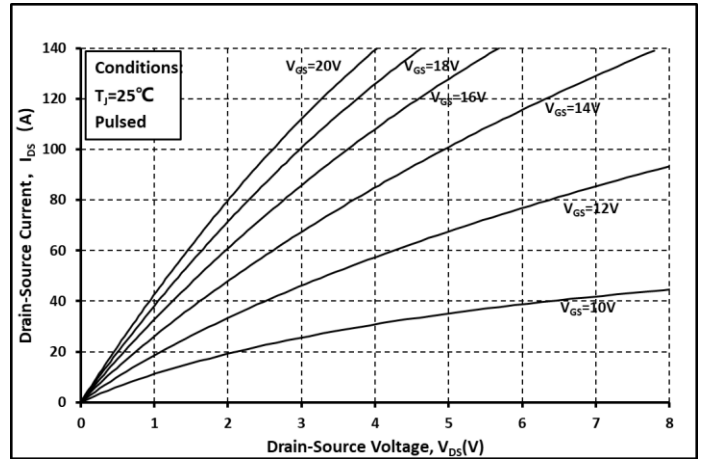


Fig. 2 Output Curve @ $T_j = 25^\circ\text{C}$

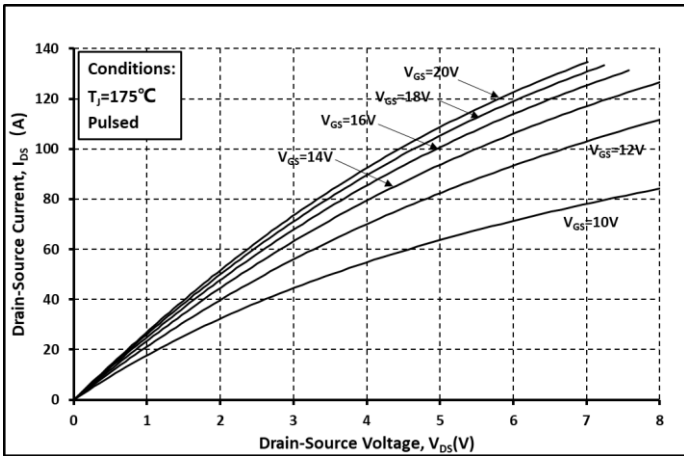


Fig. 3 Output Curve @ $T_j = 175^\circ\text{C}$

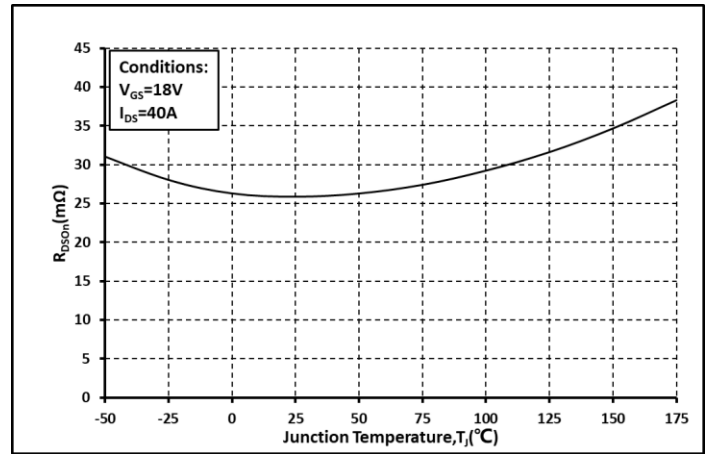


Fig. 4 R_{on} vs. Temperature

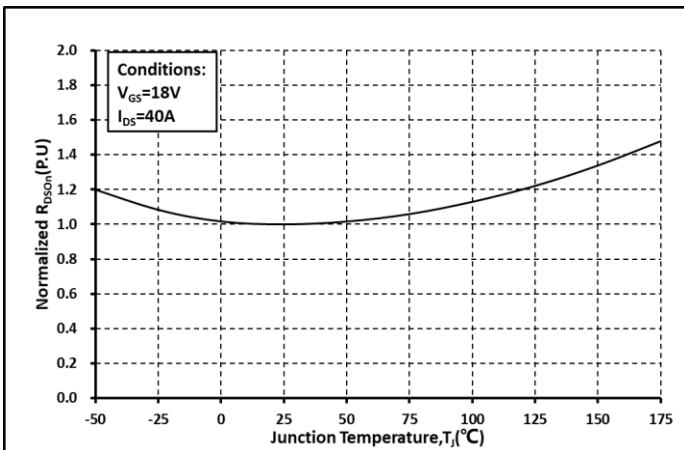


Fig. 5 Normalized R_{on} vs. Temperature

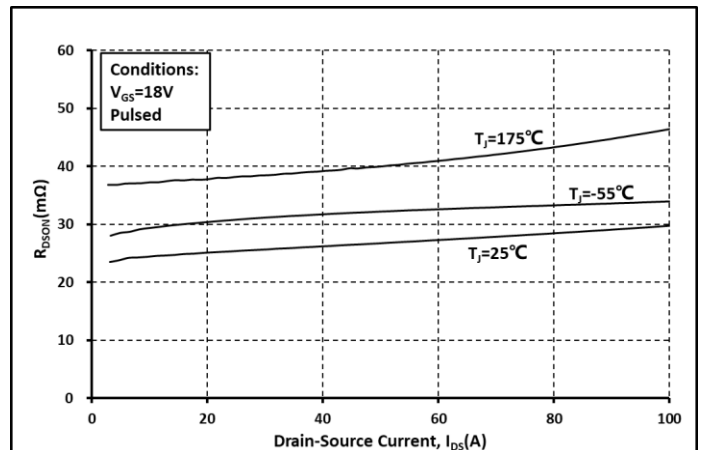


Fig. 6 R_{on} vs. I_{DS} @ Various Temperature

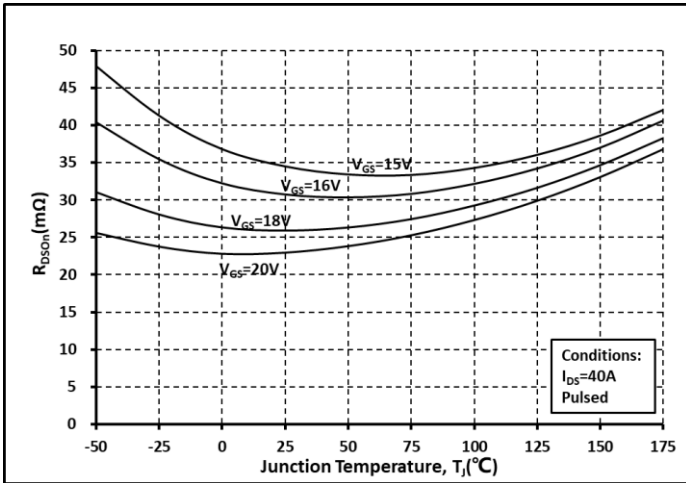


Fig. 7 Ron vs. Temperature @ Various V_{GS}

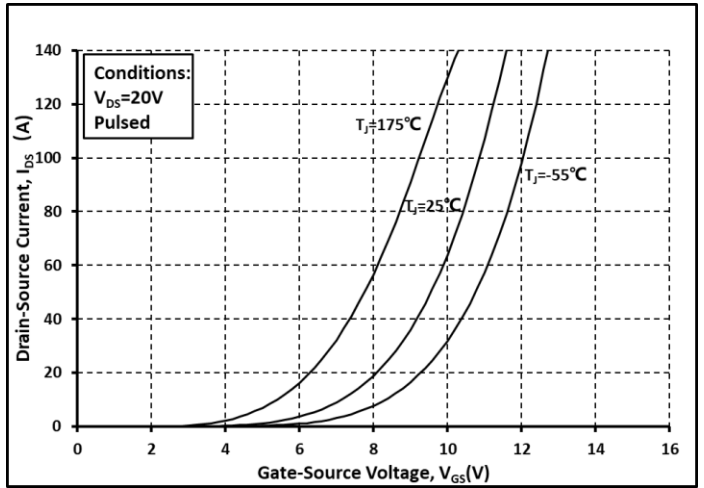


Fig. 8 Transfer Curves @ Various Temperature

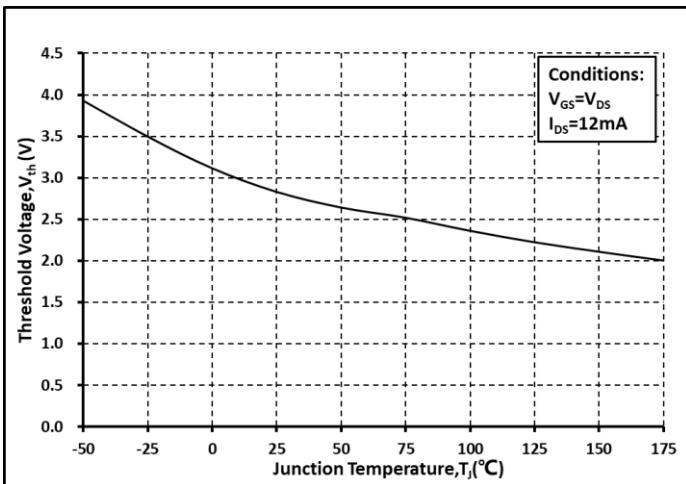


Fig. 9 Threshold Voltage vs. Temperature

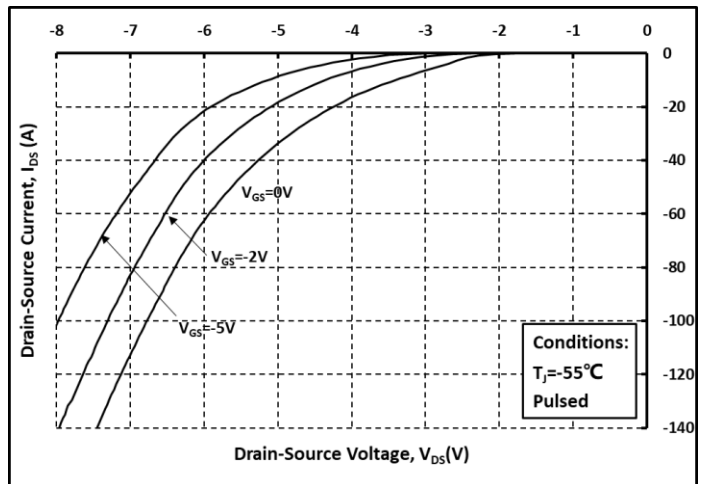


Fig. 10 Body Diode curves @ $T_J = -55^\circ\text{C}$

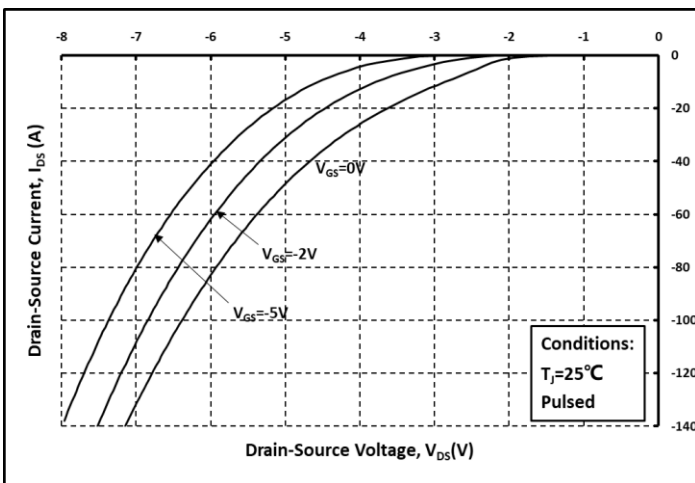


Fig. 11 Body Diode curves @ $T_J = 25^\circ\text{C}$

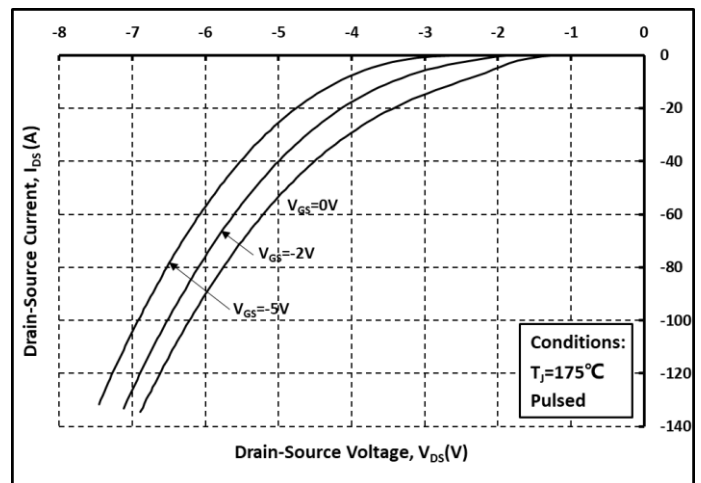


Fig. 12 Body Diode curves @ $T_J = 175^\circ\text{C}$

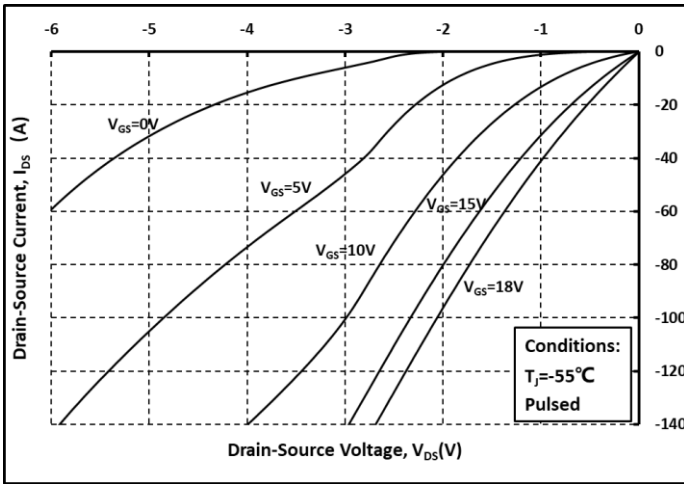


Fig. 13 3rd Quadrant curves @ $T_j = -55^\circ\text{C}$

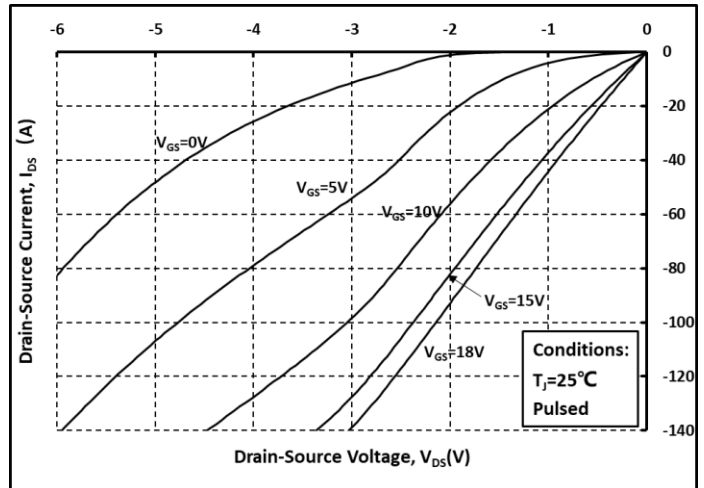


Fig. 14 3rd Quadrant curves @ $T_j = 25^\circ\text{C}$

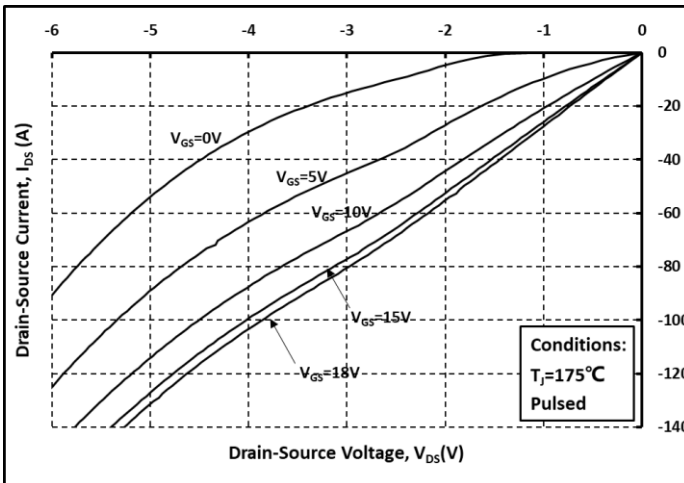


Fig. 15 3rd Quadrant curves @ $T_j = 175^\circ\text{C}$

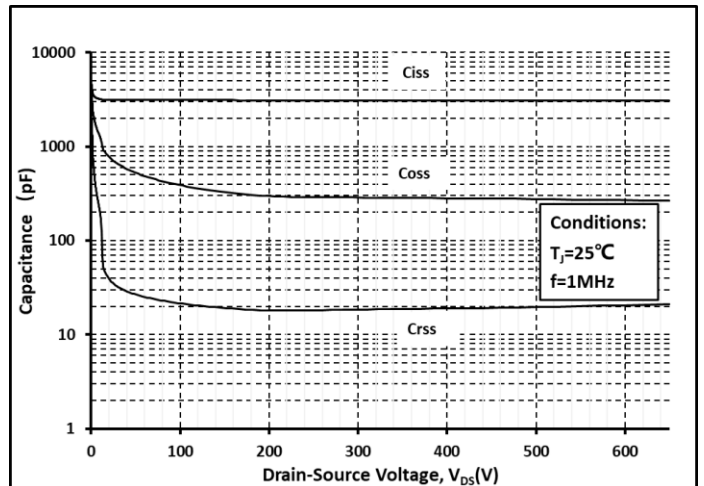


Fig. 16 Capacitance vs. V_{DS}

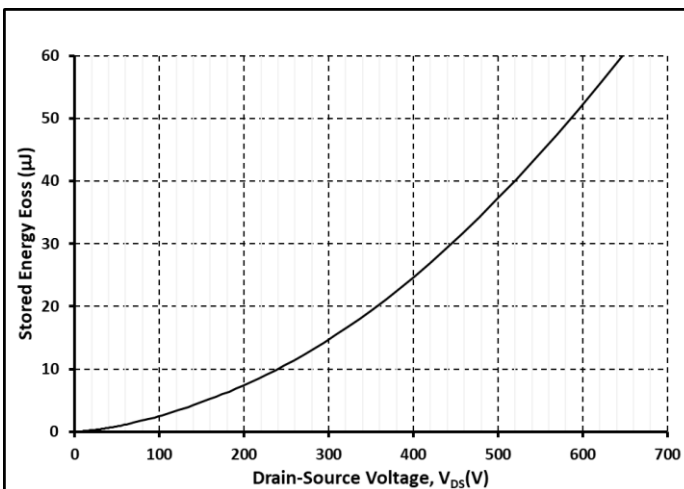


Fig. 17 Output Capacitor Stored Energy

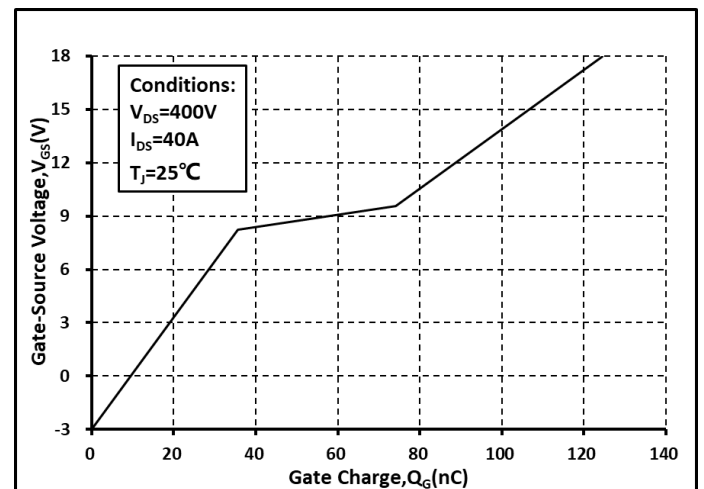


Fig. 18 Gate Charge Characteristics

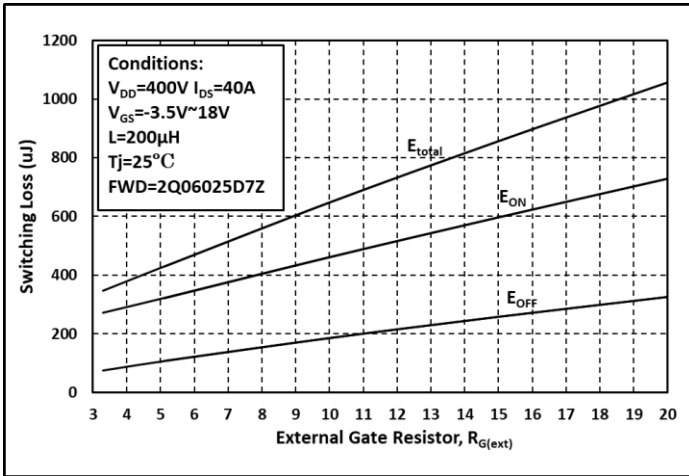


Fig. 19 Switching Energy vs. $R_{G(ext)}$

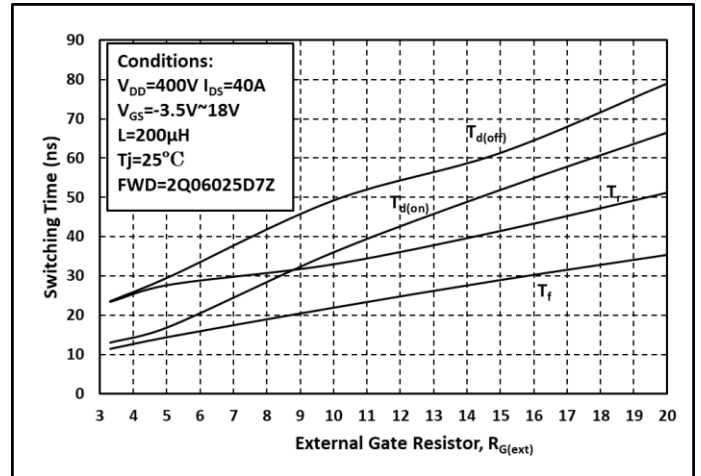


Fig. 20 Switching Times vs. $R_{G(ext)}$

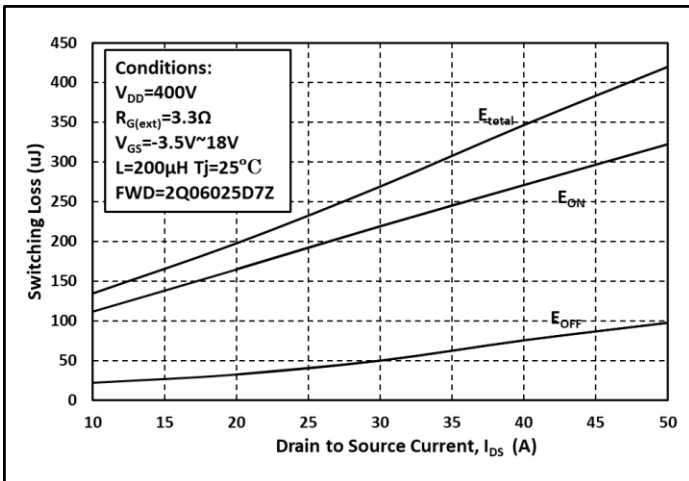


Fig. 21 Switching Energy vs. I_{DS}

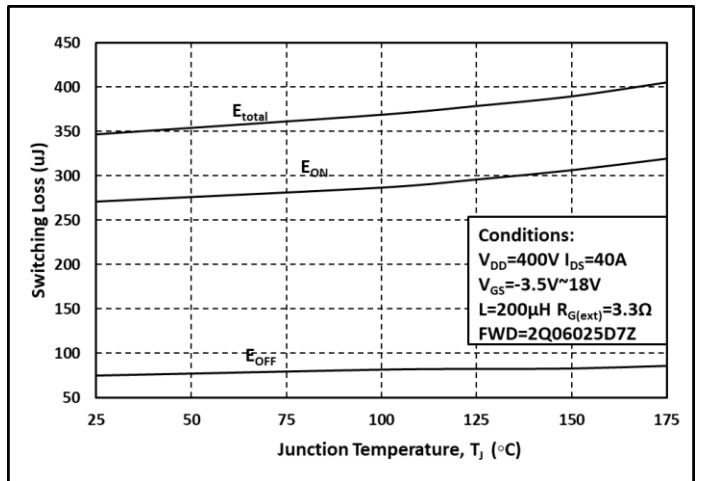


Fig. 22 Switching Energy vs. Temperature

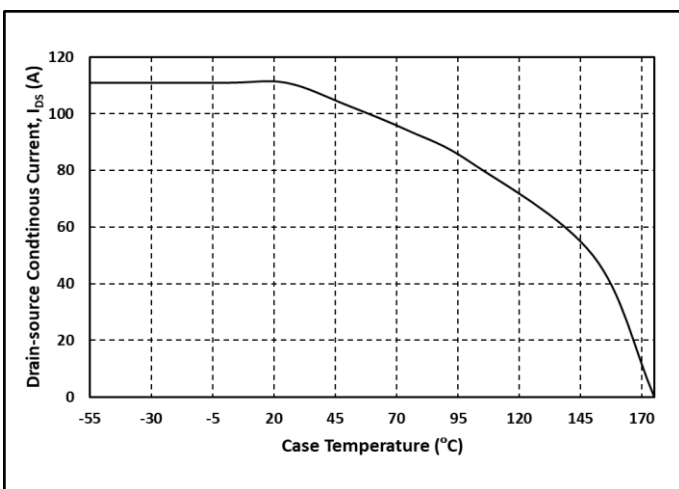


Fig. 23 Continuous Drain Current vs. Case Temperature

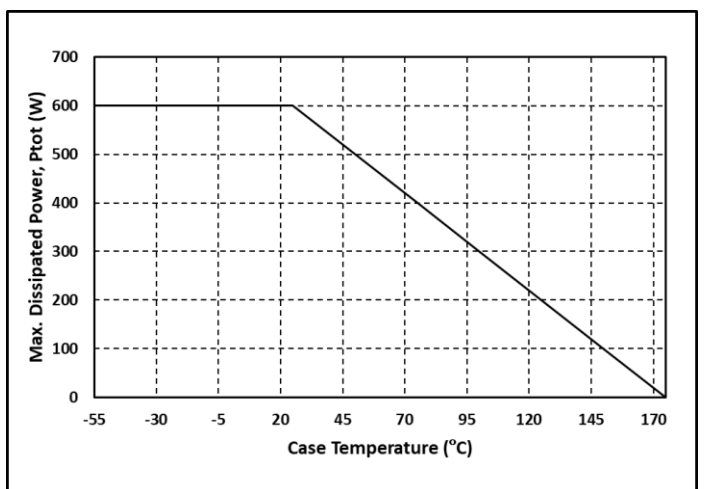


Fig. 24 Max. Power Dissipation Derating vs. Case Temperature

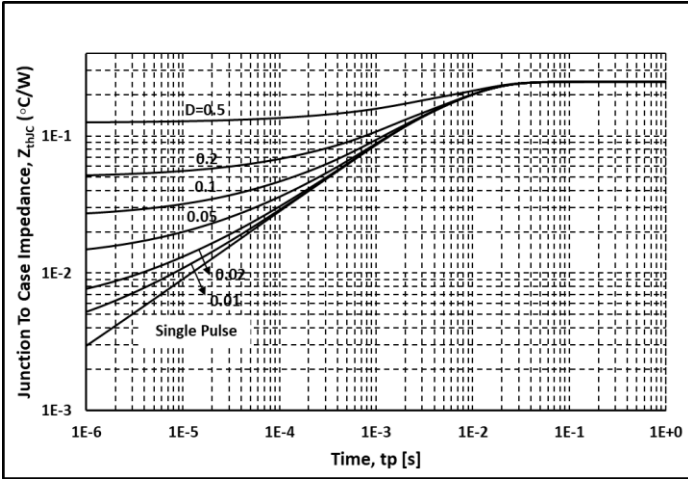


Fig. 25 Thermal impedance





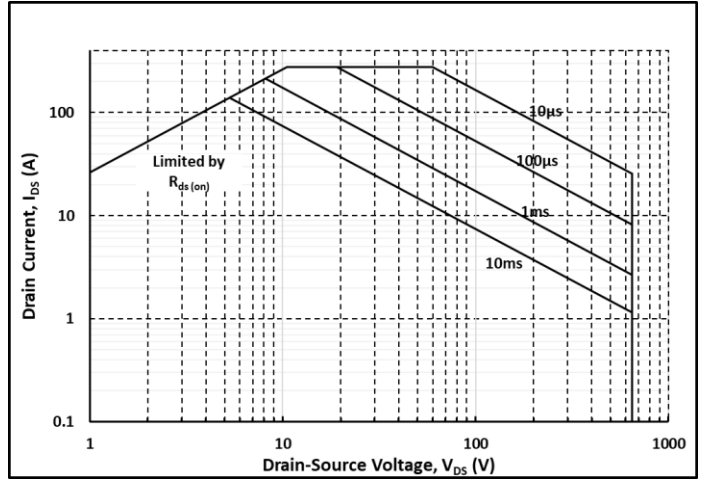


Fig. 26 Safe Operating Area

Package Dimensions

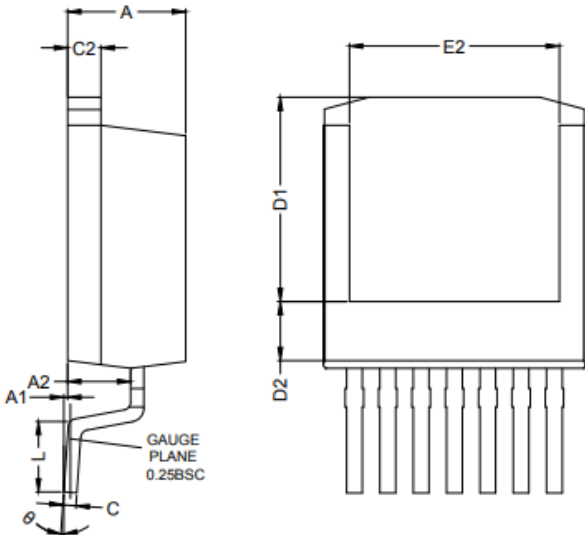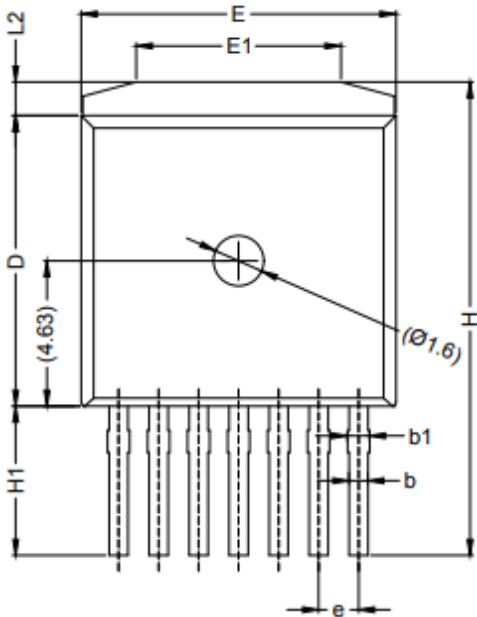

Items	Min	Max
A	4.30	4.70
A1	-	0.25
A2	2.20	2.60
b	0.52	0.72
b'	0.50	0.70
b1	0.60	0.80
c	0.42	0.62
c'	0.40	0.60
c2	1.07	1.47
D	9.05	9.45
D1	7.58	7.98
D2	2.05	2.45
e	1.27 BSC	
E	9.80	10.20
E1	6.30	6.70
E2	7.80	8.20
L	2.48	2.88
L2	0.87	1.27
H	14.87	15.27
H1	4.55	4.95
θ	0°	8°

Note:

1. Package Reference: JEDEC TO263, Variation AD
2. All Dimensions are in mm
3. Subject to Change Without Notice

Notes

For further information please contact IVCT's office.

Copyright©2023 InventChip Technology Co., Ltd. All rights reserved.

The Information in this document is subject to change without notice.

Related Links

<http://www.inventchip.com.cn>



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [InventChip](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)