



## Series: iMOD™

### Features:

- Built with patented THiNCAPS™
- Front terminal connections
- ROHS and CE compliance
- Monitoring to help achieve long life

### Applications:

- AGVs
- Robotics
- Harbor crane
- Industrial Equipment

### Markets:

- Manufacturing
- Logistics
- Pharmaceutical
- Warehousing
- Distribution
- Logistics
- Shipping

### Markings:


Products are marked with the following: Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal marking.

<b>Operating</b>	
Voltage, Rated	2.7 V/Cell
Voltage, Surge	2.85 V/Cell
Capacitance Tolerance	+10% / -0%
<b>Temperature</b>	
Range, Operational	0°C to 50°C (at Rated Current)
Range, Storage	-25°C to 60°C
<b>Life</b>	
DC	10 years, rated voltage, 25°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Endurance	1000 hrs, rated voltage, 70°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Shelf	1000 hrs, no voltage, 70°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Cycle	>500,000 cycles, Rated to half rated voltage, 25°C
	$\Delta C, 20\%$ decrease, ESR, 100% increase
<b>Standards Compliance</b>	RoHS



## Product Specifications

Part Number	iMOD054V062P3L-11A	iMOD059V062P3L-15A	iMOD054V062A3L-15A
<b>Electrical</b>			
Capacitance (F)	62	62	62
ESR, DC (mΩ) [3ms]	17	17	17
Overvoltage/Temp Monitor	Yes	Yes	Yes
Voltage Rated (V)	54	54	54
Peak Voltage	57	57	57
<b>Cycling</b>			
Current, Peak [1s] (A)	815	815	815
Continuous Current (A)*	35	22	22
Current, Short Circuit (A)	3100	3100	3100
<b>Management</b>			
Balancing Method	Passive	Passive	Active
<b>Energy/Power</b>			
$E_{max}$ (Whr)	25	25	25
$E_{max}$ (Whr/kg)	3.1	3.1	3.1
$E_{max}$ (Whr/L)	2.2	2.8	2.8
$P_{max}$ (kW/kg)	5.4	5.4	5.4
$P_{max}$ (kW/L)	3.8	4.8	4.8
$P_d$ (kW/kg)	2.6	2.6	2.6
<b>Physical</b>			
W (mm) [max]	143	143	143
L (mm)	334	334	334
H (mm)	238	189	189
Mass (kg)	8	8	8
Volume (L)	11	9	9
Specials	FAN/Plastic Housing	Plastic Housing	Plastic Housing

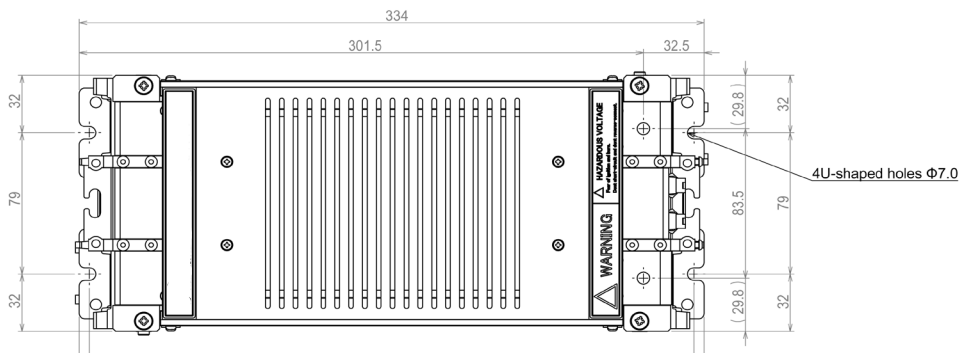

## Additional Technical Information

Product specification test methods available in separate document.

\*Rated current = continuous current with 20°C temperature rise.



18 Stadium Circle, Oneonta, NY 13820, USA

Toll Free: +1.877.751.4222

607.441.3500 | Fax: 607.433.9014

[www.ioxus.com](http://www.ioxus.com) | [info@ioxus.com](mailto:info@ioxus.com)

© 2012 Ioxus, Inc. | 121011

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Supercapacitors](#) / [Ultracapacitors](#) category:*

*Click to view products by [Ioxus](#) manufacturer:*

Other Similar products are found below :

[C-TEC1225 P](#) [SCCY73B407SLBLE](#) [MAL223551014E3](#) [MAL223551007E3](#) [CPM3225A-2K](#) [iMOD054V062P3L-11A](#) [SCCS30B126SRB](#)  
[HSL0814-3R8106-R](#) [HS0814-3R8106-R](#) [DRE10/2.5](#) [DRL106S0TI25RRDAP](#) [DRL226S0TK25RR](#) [106DCN2R7M](#) [SCCR20B335SRB](#)  
[SCCS30B106SRB](#) [SCCT30B156SRB](#) [SCCU30B306MRB](#) [SCMR14C474MRBA0](#) [SCMR14C474MSBA0](#) [SCMR22C155MSBA0](#)  
[SCMS22C255MRBA0](#) [SCMT22C505MRBA0](#) [SCMT32C755MRBA0](#) [DRL475S0TG20RRDAP](#) [FCS0H224ZFTBR24](#) [FR0H473ZF](#)  
[SCCV40B506MRB](#) [GW209F](#) [TV1020-3R0605-R](#) [TV1245-3R0346-R](#) [PAS0815LS2R5105](#) [MAL222091008E3](#) [PAS0815LN2R7205](#)  
[SCCY62B307VSB](#) [SCMR18C105MSBA0](#) [EEC-HL0E107](#) [EEC-HL0E506](#) [SCMR18D105MRBB0](#) [MAL219691154E3](#) [HVZ0E107NF-LT](#)  
[HVZ0E106NF](#) [MAL219691126E3](#) [MAL219691125E3](#) [MAL219691225E3](#) [TV1840-3R0606-R](#) [HVZ0E275NF](#) [HVZ0E207NF-LT](#)  
[HVZ0E226NF](#) [HVZ0E105NF](#) [TV1245-3R0346-R](#)