


IB300026

INDUCTIVE SENSORS • DISTANCE MEASUREMENT

sensor inductive, analog, M30x1.5 74long, Flush, Sn: 0-20, 15-30V
DC, 0-10V/4-20mA, Connector M12, IP67, Brass Chrome-plated

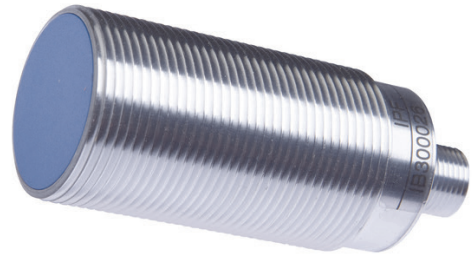

MECHANICAL FEATURES

Active area material of sensor	PBTP
Ambient temperature	-25 °C ... 70 °C
Atmospheric-change resistant (temperature cycle)	-
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
High-pressure-proof sensors	-
Housing coating	Chrome-plated
Housing material	Brass
Increased ambient temperatures > 80°C	-
Mechanical mounting condition for sensor	Flush
Number of cores	3
Sensor length	73.5 mm
Thread pitch	1.5 mm
Thread size, metric	30
Wire cross section	0.14 mm ²

ELECTRICAL FEATURES

Absolute repeat accuracy	0.03 mm
Distance measuring sensors	+
Magnetic field resistant	-
Measuring range length	0 mm ... 20 mm
No-load current	5 mA
Operating voltage	15 V ... 30 V
Relative repeat accuracy	0.03 %
Residual ripple	10 %
Reverse polarity protection	+
Short-circuit protection	-
Supply voltage	15 V ... 30 V
Type of analog output	0 V ... 10 V / 4 mA ... 20 mA
Type of electrical connection	Connector M12
Voltage type	DC

OTHER FEATURES

Devices for hose mounting	-
Feeding technology	-
Harsh environmental conditions	-
Hygienic and wet area	-
Metallic sensor surface	-
Oil and cooling lubricants	-
Relative linearity deviation	5 %
Ring-shaped sensors	-
Welding-proof sensors	-


Other

Packaging dimensions	124.0mm x 35.0mm x 149.0mm
Shipping weight	0.17kg
Tariff code	85365019


Classification

ipf product group	209
eClass 8.0	27270802
eClass 9.0	27270802
eClass 9.1	27270802
ETIM-5.0	EC001818
ETIM-6.0	EC001818
ETIM-7.0	EC001818

Connection

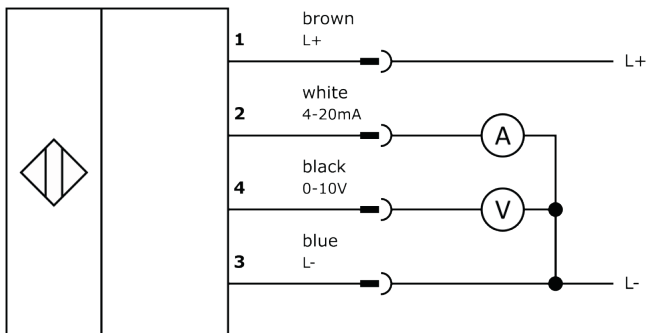

Dimensional drawing

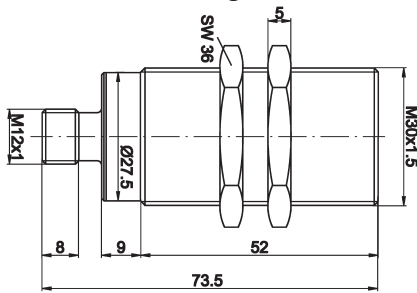

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [IPF ELECTRONIC](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [8027AL20NL2CPXX](#) [FYCC8E1-2](#)
[9221350022](#) [922AA2W-A9P-L](#) [PLS2](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB2XM-A3N-L](#) [972AB3XM-A3P-L](#) [PS3251](#) [980659-1](#) [QT-12](#) [E2E2-](#)
[X5M41-M4](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2EX3D1SM1N](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [E2E-X5Y2-N](#) [E2E-X7D1-](#)
[M1J-T-0.3M-N](#) [E2K-F10MC1](#) [5M](#) [EH-302](#) [EI3010TBOP](#) [EI5515NPAP](#) [MS605AU](#) [EP175-32000](#) [IFRM04N35B1/L](#) [IFRM04P1513/S35L](#)
[IFRM06P1703/S35L](#) [IFRM08P1501/S35L](#) [IFRM12N17G3/L](#) [IFRM12P17G3/L](#) [IFRM12P3502/L](#) [IFRM12P37G1/S14L](#) [ILFK12E9189/I02](#)
[ILFK12E9193/I02](#) [IMM2582C](#) [OISN-013](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#) [25.523.3253.0](#)