

KY98C962

CAPACITIVE SENSORS • INTEGRATED BUTTON

sensor capacitive, push button, M18x1, 22.5mm, STOP, 19-29V DC, -30°C, Relay contact NC, Connector M8 4pin, IP67, Plastic Anodised, With LED display



MECHANICAL FEATURES

| | |
|---------------------------|------------------------|
| Ambient temperature | -30 °C ... 70 °C |
| Button design | Flat |
| Degree of protection (IP) | IP67 |
| Design | Cylinder, screw-thread |
| Front ring color | Chrome |
| Front ring material | Metal |
| Hole diameter | 22.5 mm |
| Housing coating | Anodized |
| Housing material | Plastic |
| Lens design | Round |
| Max. tightening torque | 1 Nm |
| Thread length | 10 mm |
| Thread pitch | 1 mm |
| Thread size, metric | 18 |

ELECTRICAL FEATURES

| | |
|---|-------------------------|
| No-load current | 30 mA |
| Number of contacts as normally closed contact | 1 |
| Number of pins | 4 |
| Rated control supply voltage U_s at DC | 19.2 V ... 28.8 V |
| Rated switching current | 400 mA |
| Reverse polarity protection | + |
| Scanning | + |
| Suitable for illumination | + |
| Supply voltage of lamp | 24 V |
| Switching function, latching | - |
| Type of electrical connection | Connector M8 |
| Type of switching function | Normally closed contact |
| Type of switching output | Relay contact |
| Voltage drop | 2.5 V |
| Voltage type | DC |
| With LED display | + |

OTHER FEATURES

| | |
|-----------------|---|
| With front ring | + |
|-----------------|---|


Other

| | |
|----------------------|---------------------------|
| Packaging dimensions | 43.0mm x 43.0mm x 105.0mm |
| Shipping weight | 0.03kg |
| Tariff code | 85365019 |

Classification

| | |
|-------------------|----------|
| ipf product group | 700 |
| eClass 8.0 | 27371228 |
| eClass 9.0 | 27371228 |
| eClass 9.1 | 27371228 |
| ETIM-5.0 | EC001028 |
| ETIM-6.0 | EC001028 |
| ETIM-7.0 | EC001028 |

Connection

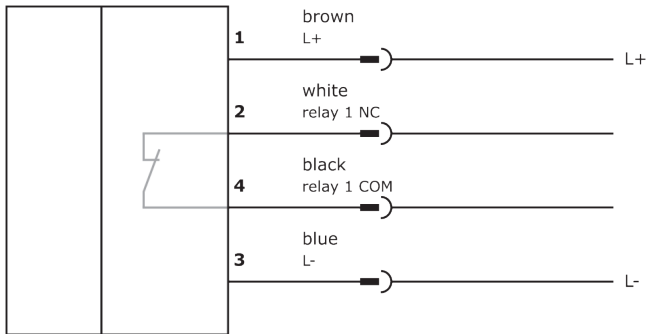

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [IPF ELECTRONIC](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [8027AL20NL2CPXX](#) [FYCC8E1-2](#)
[9221350022](#) [922AA2W-A9P-L](#) [PLS2](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB2XM-A3N-L](#) [972AB3XM-A3P-L](#) [PS3251](#) [980659-1](#) [QT-12](#) [E2E2-](#)
[X5M41-M4](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2EX3D1SM1N](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [E2E-X5Y2-N](#) [E2E-X7D1-](#)
[M1J-T-0.3M-N](#) [E2K-F10MC1](#) [5M](#) [EH-302](#) [EI3010TBOP](#) [EI5515NPAP](#) [MS605AU](#) [EP175-32000](#) [IFRM04N35B1/L](#) [IFRM04P1513/S35L](#)
[IFRM06P1703/S35L](#) [IFRM08P1501/S35L](#) [IFRM12N17G3/L](#) [IFRM12P17G3/L](#) [IFRM12P3502/L](#) [IFRM12P37G1/S14L](#) [ILFK12E9189/I02](#)
[ILFK12E9193/I02](#) [IMM2582C](#) [OISN-013](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#) [25.523.3253.0](#)