

## OS120006

### OPTICAL SENSORS • THROUGH-BEAM SENSORS TRANSMITTERS

sensor optical, Through-beam sensor transmitter, M12x1 50long, Sn:  
10m, 10-35V DC, Cable 2m PVC, IP67, Brass Chrome-plated+Glass,  
Polarity free red light



#### MECHANICAL FEATURES

Ambient temperature	-25 °C ... 55 °C
Cable length	2 m
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
Housing coating	Chrome-plated
Housing material	Brass
Material of cable sheath	PVC
Material of optical surface	Glass
Max. tightening torque	10 Nm
Number of cores	3
Sensor length	50 mm
Thread length	50 mm
Thread pitch	1 mm
Thread size, metric	12
Version	Through-beam sensor transmitter
Wire cross section	0.34 mm <sup>2</sup>

#### ELECTRICAL FEATURES

Clock frequency of the transmitter	15 kHz
Connection to amplifier	-
Function test	+
Measuring range	10 m
No-load current	15 mA
No-load current, transmitter	15 mA
Operating voltage	10 V ... 35 V
Readiness delay	20 ms
Residual ripple	20 %
Reverse polarity protection	+
Suitable for safety functions	-
Type of electrical connection	Cable
Type of input voltage	DC
Voltage type	DC
With time function	-

## OPTICAL FEATURES

Light source	Polarity free red light
Wavelength of the sensor	660 nm
Light beam form	Point

## OTHER FEATURES

Scope of delivery of the one-way system	Transmitter
---	-------------


## Other

Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.11kg
Tariff code	85365019


## Classification

ipf product group	100
eClass 8.0	27270901
eClass 9.0	27270901
eClass 9.1	27270901
ETIM-5.0	EC002716
ETIM-6.0	EC002716
ETIM-7.0	EC002716

## Connection

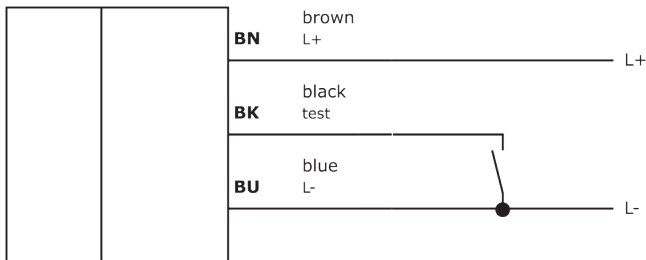

## Dimensional drawing

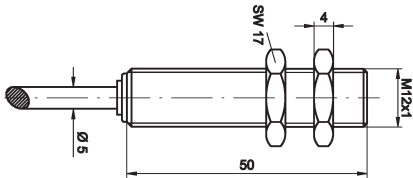

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Photoelectric Sensors](#) category:*

*Click to view products by [IPF ELECTRONIC](#) manufacturer:*

Other Similar products are found below :

[7442AD2X5FRX](#) [EX-19B-LP](#) [7443AR0X5FRX](#) [7452AD4D4NNX](#) [F3WD052C5M](#) [7655AR-04-F-1-2-RX](#) [7694ADE04DS2X](#) [FE7C-FRC6S-M](#) [PM-R24-R](#) [Q45VR2FPQ](#) [E3JUXM4MN](#) [E3S3LE21](#) [E3SCT11M1J03M](#) [E3VDS70C43S](#) [E3XNM16](#) [BR23P](#) [HOA6563-001](#) [OJ-3307-30N8](#) [OS-311A-30](#) [P34036](#) [P60001](#) [PB10CNT15PO](#) [S14132](#) [S52101](#) [S56258](#) [SH-21E](#) [SH-32R](#) [FD-SN500](#) [SU-79](#) [T36342](#) [T40300](#) [T60001](#) [PD60CNX20BP](#) [FX-302-HY](#) [PX-22](#) [PZ2-51P](#) [CYNUTX10](#) [UZB802](#) [UZB803](#) [UZFRG1](#) [UZFRG4](#) [UZFRT4](#) [UZFTT8](#) [ZX-XC4A4M](#) [E3D-R3Y1](#) [E3E23Y2US](#) [E3E-R1Y2](#) [E3SDS20E1](#) [E3TFD14N](#) [E3XR-CC4](#)