


## VKA0L075

### CONNECTION TECHNOLOGY • CABLE SOCKETS / CONNECTORS PRE-ASSEMBLED ON ONE SIDE

, 10m, M8 Female (socket) 3pin Straight, Free conductor end, 3x0.34mm<sup>2</sup>, TPE Gray, Ø4.6mm, 60V, -40-105°C, IP67, PP, 4A, Suitable for trailing chain and torsion resistant, Hygienic and wet area

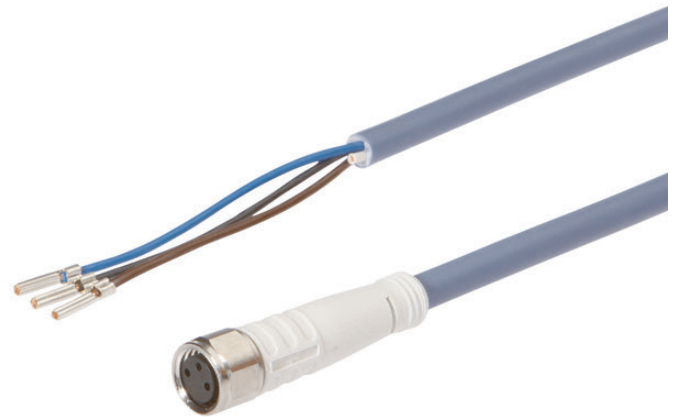

#### MECHANICAL FEATURES

Ambient temperature	-40 °C ... 105 °C
Cable infeed of A connection	Straight
Cable length	10 m
Cable sheath color	Gray
Contact body material	Brass
Contact coating material	Gold
Degree of protection (IP)	IP67
Housing material	PP
Increased ambient temperature > 90°C	+
Material of cable sheath	TPE
Number of cores	3
Perm. ambient temperature of cable, fixed cable	-40 °C ... 105 °C
Perm. ambient temperature of cable, flexible cable	-25 °C ... 105 °C
Seawater-resistant	+
Suitable for trailing chain	+
Version	Connection cable
Wire assembly	42 x 0.1mm
Wire cross section	0.34 mm <sup>2</sup>

#### ELECTRICAL FEATURES

Ampacity	4 A
Flow resistance	5 mOhm
Line diameter	4.6 mm
Nominal supply voltage	60 V
Number of pins of A connection	3
Rated current	4 A
Rated voltage	60 V
Type of A electrical connection	M8
Type of B electrical connection	Free conductor end
Type of cable	Multi-core
Type of plug-in contact, A connection	Female (socket)
With LED display	-

## OPTICAL FEATURES

Degree of soiling	3
-------------------	---

## OTHER FEATURES

Acid and alkali-resistant	+
Flame retardant	No
Free of LABS	+
Halogen-free	+
Hydrolysis-proof	+
Hygienic and wet area	+
IR-networked	-
Ozone and UV-resistant	+
Recyclable	+
Silicone-free	-
Suitable for trailing chain and torsion resistant	+


## Other

Packaging dimensions	165.0mm x 28.0mm x 180mm
Shipping weight	0.32kg
Tariff code	85444290

## Classification

ipf product group	856
eClass 8.0	27279218
eClass 9.0	27060311
eClass 9.1	27060311
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855

## Connection



- 1 brown
- 3 blue
- 4 black

## Dimensional drawing

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Cables / Actuator Cables](#) category:*

*Click to view products by [IPF ELECTRONIC](#) manufacturer:*

Other Similar products are found below :

[60963](#) [60964](#) [M83513/19-F01CP](#) [703000D02F2002](#) [703000D02F300](#) [703001D02F0602](#) [703001D02F1201](#) [703001D02F300](#)  
[704000D02F120](#) [773032K02F030](#) [802027107404-1](#) [802027213811-1](#) [804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#)  
[885030A09M010](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#) [1200651713](#) [1200660844](#) [1200660845](#) [1200661173](#) [1200680071](#)  
[1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#) [1200980102](#) [1200650218](#) [1200650298](#)  
[1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#) [1200670080](#) [1200670220](#) [1200680331](#)  
[1200720252](#) [1200720255](#) [1200720597](#) [1200730184](#) [1200860344](#)