


# minimate\*

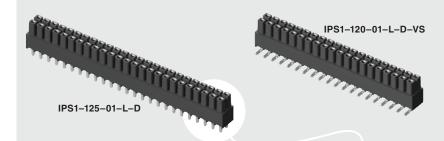

(2.54 mm) .100"

**IPS1 SERIES** 

# SHROUDED POWER CONNECTOR SET

#### **SPECIFICATIONS**

For complete specifications see www.samtec.com?IPS1

Insulator Material: Black LCP

Contact Material: Phosphor Bronze Plating:

Sn or Au over 50 µ" (1.27 µm) Ni Operating Temp Range: -55 °C to +105 °C with Tin; -55 °C to +125 °C with Gold

Insertion Depth:

(3.81 mm) .150" to (6.48 mm) .255" Wiping Distance:

Wiping Distance:
(0.38 mm) .015"

Voltage Rating:
775 VAC/1095 VDC
Standard Creepage:
(2.55 mm) .100" (without -LC)
(1.08 mm) .043" (with -LC)
Standard Clearance:
(1.75 mm) .069" (without -LC)
(0.62 mm) .024" (with -LC)

RoHS Compliant: Yes

IPT1/IPS1	
PINS	CURRENT RATING (PER CONTACT)
1	5.9 A
2	4.8 A
3	4.1 A
4	3.6 A
50	23 /

## **PROCESSING**

Lead-Free Solderable:

Yes SMT Lead Coplanarity: (0.13 mm) .005" max (05-10)\* (0.15 mm) .006" max (15-25)\* \*(.004" stencil solution may be available; contact

### RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality


IPG@samtec.com)



#### **ALSO AVAILABLE** (MOQ Required)

- · Other sizes
- Other platings
- · Latching feature
- · No. 1 position polarized

Some sizes, styles and options are non-standard, non-returnable.

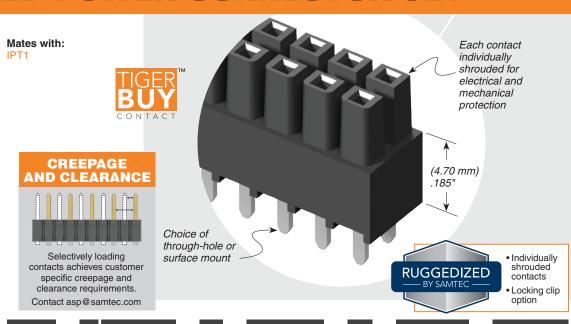

**PLATING** 

**OPTION** 

05, 10, 15, 20, 25 (Standard sizes)

50

(2.54)

NO. PINS

**PER ROW** 

= 10 µ" (0.25 µm) Gold on contact, Matte Tin on tail

Leave blank for Through-hole -VS

**OPTION** 

= Surface Mount

-RA = Right-angle

-LC = Locking Clip (Manual placement required)


**OTHER** 

OPTION

–K = (5.50 mm) .217" DIA Polyimide film Pick & Place Pad (-VS only)

(-VS only)

-TR = Tape & Reel Packaging (-VS only)

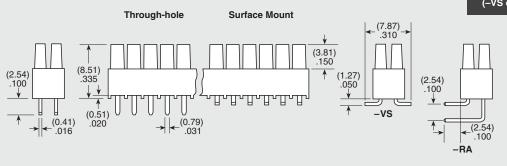

(4.95)

No. of positions x (2.54) .100  $_{-}$  + (0.38) .015

(2.54)

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power to the Board category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

```
10131318-08512GRLF 6450171-4 6450552-7 6600323-8 6643429-1 6646040-2 6651939-1 6766604-1 120959-1 1393557-2 1393532-2 1393532-3 1393532-4 1393557-1 1600812-5 1-6450861-2 1645595-1 1743490-1 1744132-7 1761122-1 1766169-1 1766250-1 18362 1892109-1 1-967627-6 2226808-1 2-6450860-5 2-6450860-6 2-6450870-0 93003-0502 953552-1 1-6450161-4 1-6450850-6 1645526-2 1-6600130-0 1743419-1 1766150-1 2005243-2 211110-1 2-6600130-2 TE34-12-16P-F0 5-6450830-6 5646956-4 36662-0005 40585-3000 4-6450830-9 4-6600333-3 51142-0214 10134048-911LF 10123159-301LF
```