

Customer Part:

Description

- IQXT-205-2-18 is a 2.0 x 1.6mm SMD Voltage Controlled Temperature Compensated Crystal Oscillator (VCTCXO) in a hermetically sealed package.
- Model IQXT-205-2-18
- Model Issue number 1
- Developed frequencies: 16.2, 16.368, 16.369, 19.2, 20.0, 24.0, 25.0, 26.0, 27.456, 28.925, 28.974, 30.0, 32.0, 33.6, 38.4, 48.0, 50.0 and 52.0MHz

Frequency Parameters

- Frequency 52.0MHz
- Frequency Tolerance Max $\pm 1.50\text{ppm}$
- Tolerance Condition $@ 25^\circ\text{C} \pm 2^\circ\text{C}$
- Frequency Stability $\pm 0.50\text{ppm}$
- Operating Temperature Range -30.00 to 85.00°C
- Ageing $\pm 1\text{ppm}$ max per year @ 25°C
 $\pm 3^\circ\text{C}$
- Frequency Tolerance: Referred to nominal frequency before reflow soldering.
- Supply Voltage Variation:
 - @ $\pm 5\%$ change for $\pm 0.5\text{ppm}$ stability: $\pm 0.1\text{ppm}$ max
 - @ $\pm 5\%$ change for $\pm 2.0\text{ppm}$ stability: $\pm 0.2\text{ppm}$ max
- Load Variation:
 - @ $\pm 10\%$ change for $\pm 0.5\text{ppm}$ stability: $\pm 0.1\text{ppm}$ max
 - @ $\pm 10\%$ change for $\pm 2.0\text{ppm}$ stability: $\pm 0.2\text{ppm}$ max
- Short Term Stability (Allan variance): $\pm 1\text{ppb}$ max (Tau = 0.1s)
- IR Reflow Resistance (ref to frequency before reflow): $\pm 1\text{ppm}$ max

Electrical Parameters

- Supply Voltage 1.8V $\pm 5\%$
- Current Draw Max 2.000mA
- Absolute Maximum Ratings:
 - Supply Voltage: -0.6V to 4.6V
 - Control Voltage: -0.6V to $V_s+0.6\text{V}$

Frequency Adjustment

- Pulling $\pm 8\text{ppm}$ min to $\pm 13\text{ppm}$ max
- Control Voltage $0.9\text{V} \pm 0.8\text{V}$
- Slope: Positive

Output Details

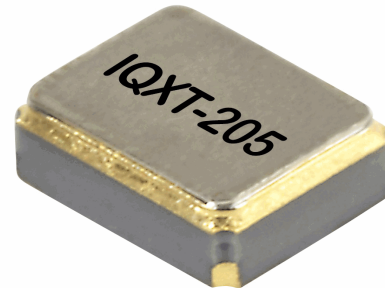
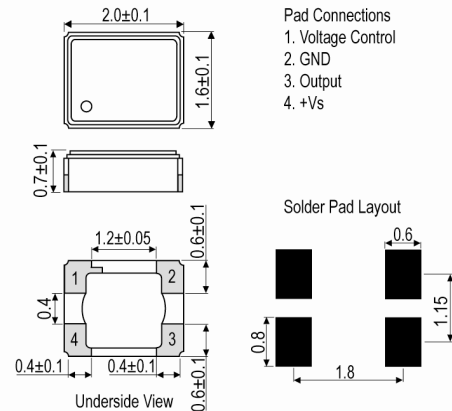
- Output Compatibility Clipped Sine
- Drive Capability $10\text{k}\Omega//10\text{pF}$
- Output: DC coupled
- Output Level: 0.8V pk-pk min
- Start Up Time (90% of V pk-pk): 2ms max
- Start Up Time (within $\pm 0.5\text{ppm}$): 2ms max

Noise Parameters

- Phase Noise (typ): $-135\text{dBc}/\text{Hz}$ @ 1kHz
- Harmonic Distortion: -5.0dBc max

Environmental Parameters

- Storage Temperature Range: -40 to 85°C


Outline (mm)

Sales Office Contact Details:

UK: +44 (0)1460 270200

France: 0800 901 383

 Email: info@iqdfrequencyproducts.com

Germany: 0800 1808 443

USA: +1.760.318.2824

 Web: www.iqdfrequencyproducts.com

Customer Part:**Manufacturing Details**

- RoHS Terminations NiAu
- RoHS Reflow Temp +250°C ±10°C for 10 sec max

Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Cutt Cut tape
Pack Size: 100
- *Alternative packing option available*

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCVCXO Oscillators](#) category:

Click to view products by [IQD](#) manufacturer:

Other Similar products are found below :

[FOX923CH-19.20M](#) [SIT5000ACC8E-33VQ-19.200000X](#) [KT7050A10000KAW33TAD](#) [LFTVXO009900BULK](#) [LFTVXO076348CUTT](#)
[LFTVXO076344CUTT](#) [KT2016K27600ZAW18TCS](#) [LFTVXO076346CUTT](#) [LFTVXO076343CUTT](#) [LFTVXO072344CUTT](#)
[LFTVXO076349CUTT](#) [KT1612A26000ACW28TAN](#) [LFTVXO009907BULK](#) [AST3TQ53-V-10.000MHz-5-C](#) [AST3TQ53-V-20.000MHz-5-C](#)
[ASVTX-12-A-16.369MHZ-I15-T](#) [ASVTX-13-A-19.200MHZ-D15-T](#) [ASVTX-13-A-26.000MHZ-D15-T](#) [LFTVXO009917BULK](#)
[LFTVXO009919BULK](#) [LFTVXO009920BULK](#) [LFTVXO063787BULK](#) [LFTVXO070167Cutt](#) [LFTVXO070168Cutt](#) [LFTVXO070186Cutt](#)
[LFTVXO009915BULK](#) [TCD4029-26.0M](#) [THD3004-16.384M](#) [LFTVXO009900](#) [LFTVXO009901BULK](#) [ASVTX-09-19.440MHZ-T](#)
[FOX801BELF-100](#) [FOX801BELF-200](#) [LFTVXO009919](#) [LFTVXO009915](#) [LFTVXO009917](#) [LFTVXO009920](#) [LFTVXO063705](#)