
#### **Resistors**

## **Electronics**

# Precision Military and Space Qualified Chip Resistors

#### **MIL-CHIP Series**

- Now qualified to MIL-PRF-55342 Space Level T
- Four industry standard sizes available
- MIL-PRF-55342 Characteristics E, H, K, and M
- MIL-PRF-55342 extended reliability levels C, M, P, R, S and T

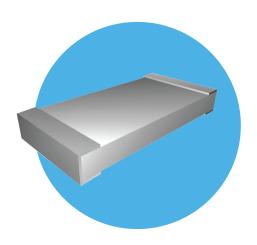


MIL-PRF-55342 Qualified Product Listing (QPL)

Style Size	Technology	MIL-PRF-55342 Characteristic	Tolerance	Resistance Range (Ω)	Rated Voltage* (V)	Rated Power (mW)	Reliability Level	-	
Style 11 RM0402	Thin Film PFC Series (TaNFilm®)	E, H, K, M	±0.1%	100R - 30K		50	C, M, P, R, S		
			±1%	49R9 - 29K	30				
			±2%, ±5%	51R0 - 30K	30				
			±10%	51R0 - 27K					
Style 12	Thin Film PFC Series (TaNFilm®)	E, H, K, M	±0.1%, ±1%	10R0 - 59K	50	100	C, M, P, R, S, T		
RM0603			±2%, ±5%, ±10%	10R0- 56K	30				
Style 06 RM0705	Thin Film PFC Series (TaNFilm®)	E, H, K, M	±0.1%	10R0 - 125K		150	C, M, P, R, S, T	Type `B´	
			±1%	10R0- 124K	50			Sn/Pb solder over nickel	
			±2%, ±5%, ±10%	10R0- 120K				barrier	
	Thin Film PFC Series (TaNFilm®)	E, H, K, M	±0.1%	100R - 500K		250	C, M, P, R, S, T		
Style 07 RM1206			±1%	10R0- 499K	100				
			±2%, ±5%, ±10%	10R0- 470K					

<sup>\*</sup>Note: Voltage shall not exceed  $\sqrt{P}$  X R.



#### Physical Data

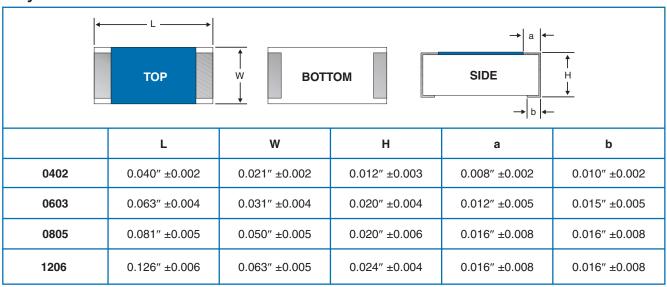

#### **Environmental Data**

Environmental Test	Thin Film Performance						
MIL-PRF-55342	MIL-PRF-55342 Characteristic H	Typical IRC ∆R					
Thermal Shock	±0.25%	±0.02%					
Low Temperature Operation	±0.25%	±0.01%					
Short-time Overload	±0.10%	±0.01%					
High Temperature Exposure	±0.50%	±0.03%					
Resistance to Solder	±0.25%	±0.01%					
Moisture Resistance	±0.40%	±0.03%					
Life	±2.0%	±0.03%					

### Precision Military and Space Qualified Chip Resistors





#### **Ordering Procedure**

**Example:** D55342H07B1E00S (Style RM1206,  $\pm$ 50ppm/°C, specification number 07, SnPb termination,  $1k\Omega$ ,  $\pm$ 1%, failure rate 0.001%/1000 hours)



1 Military Designator		2 Characteristic		3 Specification		4 Termination		5 Value & Tolerance		6 Product Level	
	0402,	Ε	25ppm/°C	11	0402	В	SnPb	4 character code.	С	Non-ER	
M55342	0603,	Н	50 ppm/°C	12	0603			Letter code marks	М	1%/1000hrs	
	0805	K	100 ppm/°C	06	0805			decimal position and	Р	0.1%/1000hrs	
D55342	1206	M	300 ppm/°C	07	1206			indicates multiplier	R	0.01%/1000hrs	
								and tolerance - see	S	0.001%/1000hrs	
								table below.	Т	Space level	

Value	&	Multiplier					
Tolerance	Code	x1	x 1000	x1000,000			
	0.1%	А	В	С			
	1%	D	Е	F			
Tolerance	2%	G	Н	Т			
	5%	J	K	L			
	10%	M	N	Р			

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thin Film Resistors - SMD category:

Click to view products by IRC manufacturer:

Other Similar products are found below:

7-2176089-6 MCW0406MD1001DP500 FCR1206J22R FCR1206J33R 1-2176090-3 1-2176089-6 ERA-3EEB2742V

NCSR250F4M50DTRGF 2176089-1 2176090-4 2176091-3 CMB02070X3000GB200 CPA2512Q6R80FS-T10 4-1625868-7 5-1625868-9 5
18022-5 ERA-3EEB2671V CFR0W4J0220A2P P1206Y1804FNTA CPA2512E68R0FS-T10 CPA2512Q4R70FS-T10 8-2176091-9 2
2176091-0 NCSR150FR003DTRT3F NTR06B5832CTRF NCSR200JR002DTRF RSJ372NL NRC-S12F4751TRF 8-1625868-1 1-2176092
4 4-2176093-9 2176091-9 RT1220P-101-M PLTU0805U1003LST5 PLTU0603U2001LST5 PLTU0805U1001LST5 PLTU0603U4702LST5

4-2176089-0 8-2176091-0 6-2176091-8 3-2176090-3 1-2176092-7 7-2176092-6 7-2176088-7 PCNM2512E1502BST5 2-2176094-5

PCNM2512E3012BST5 4-2176092-6 3-2176091-4 8-2176091-5